



Selector switch
actuators long
lever - 2 position
8LM2TS2

Product designation

Product type designation

General characteristics

Type of positions	Maintained
Material	Aluminium and zinc alloy
IEC degree of protection	IP65

Mechanical features

Mechanical life	cycles	300000
Mounting adapter		LM2TAU120
Weight	g	50


UL technical data

UL degree of protection	Type 1, 2, 3R, 4, 4X, 12, 12K
-------------------------	-------------------------------

Ambient conditions

Temperature	Operating temperature	min	°C	-25
		max	°C	+60
	Storage temperature	min	°C	-40
		max	°C	+70

Dimensions

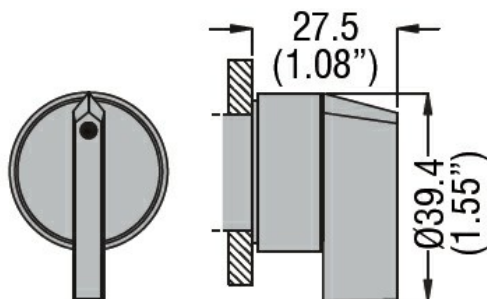

Certifications and compliance

Compliance

- CSA C22.2 n° 14
- IEC/EN 60947-1
- IEC/EN 60947-5-1
- UL508

Certificates

- CCC
- cULus
- EAC

LROS

RINA

ETIM classification

ETIM 8.0

EC000222 -
Front element for
selector switch