
| REVISION | |
|---|---|
| A | |
| B | |
| C | |
| D REDESIGNED WAS 611 CBF (10719) 11-15-83 NCG | |
| E WAS 11/16 Ⓔ 5/8 LR (11184) 3-22-85 NCG | |
| F ADDED CALLOUT SW (11525) 12-6-85 RDD | |
| G ADD CALLOUT, NOTE 3. JLC 4/6/87 (A1319) BV 042199 | |
| H ADD NOTE 4. JLC (A1975) BW050102 | H |

DEPT

# JOSEPH POLLAK CORP. BOSTON, MASS. 02122 U.S.A.


NO. 52-611 Ⓓ

Ⓓ FORMERLY 611 S/D

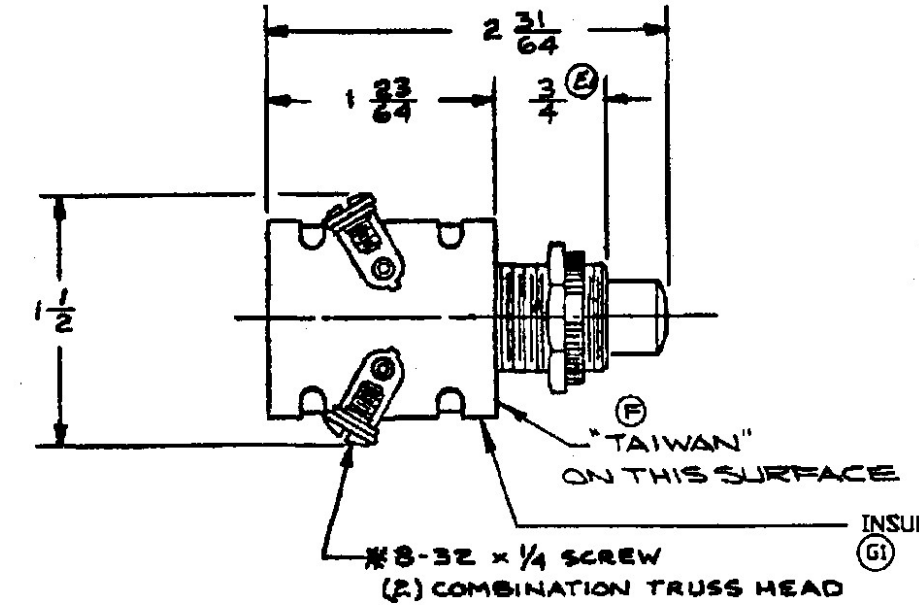


NOTES:

1. MOUNTING HOLE .650 ± .01 DIA Ⓔ2
2. RATING: 25 AMP AT 6 VOLTS
   15 AMP AT 12 VOLTS
Ⓖ2 3. SWITCH IS NORMALLY OPEN, PUSH TO CLOSE CIRCUIT.
Ⓗ 4. BACK-UP NUT MUST BE SOLID STEEL, NOT STAMPED SHEET METAL.

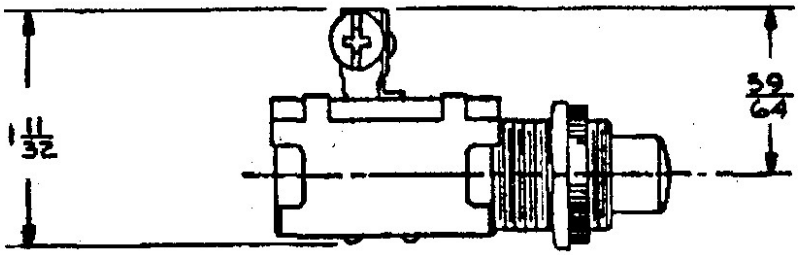


| TOLERANCES OTHER THAN SPECIFIED | | MATERIAL | TITLE |
|---|---|---|---|
| DESIGNED CBF | SCALE FULL | — | MOMENTARY NORMALLY OPEN PUSH BUTTON SW. |
| DRAWN NCG 11-15-83 | 2 PL. DEC. ± | | |
| CHECKED CAC 11-16-83 | 3 PL. DEC. ± | FINISH — | No. 52-611 Ⓓ |
| APPROVED | ANGLES ± | | |