

**CONFIDENTIAL -**  
 The information contained in this document is the property of Cooper Industries, Inc. It is not for public disclosure. Possession of the information does not convey any right to loan, sell, or disclose the information. Unauthorized reproduction or use of the information is prohibited. This document is to be returned to Cooper Industries, Inc. upon completion of the purpose for which it is loaned or upon request.

**COPYRIGHT -** Cooper Industries, Inc.  
 This is an unpublished work. The disclosure of this work is limited to a select personnel. Further dissemination or disclosure to the public is PROHIBITED. This unpublished work is protected by Federal Copyright Law and all rights thereunder are reserved by Cooper Industries, Inc.

| REV# | DESCRIPTION   | DATE          | CHKD |
|------|---|---------------|------|
| 0    | RELEASED TO SALES<br>ECN E0928 REK  | 5/17<br>2002  | REK  |
| 1    | 85.8±0.5 WAS 86.3, 74.7±0.5 WAS 75.3<br>ECN U04334 REK  | 11/05<br>2004 |      |
| 2    | ADDED 14.0 & 5.5 DIMS TO BETTER LOCATED THE MOUNTING HOLES.<br>REVISED DIM 'A' & 'B' & REMOVED THE 8/12 POLE FROM TABLE.<br>ECN-BU-U09027 A.L | 01/22<br>2009 |      |

15713 - XX - XX - X X X

TOTAL NO OF POSITIONS

LEFT BUSS BAR CODE

HARDWARE OPTIONS (SEE FIG. 1)

- 0 - WITHOUT NUTS
- 1 - SHIP 2 NUTS (B004-7032) BULK
- 2 - WITH 2 NUTS (B004-7032) INSTALLED

COVER OPTIONS

- 0 - NO COVER
- 1 - FUSE COVER
- 2 - BREAKER COVER

LABEL OPTIONS

- A - STANDARD LABEL
- OTHER - SPECIAL LABEL

**ACCESSORIES**

AUTOMOTIVE FUSE AND CIRCUIT BREAKER EXTRACTION TOOL  
 3200X -- 0, 1, 2, 3 AVAILABLE



FUSE/BREAKER CONNECTOR SECONDARY LOCK  
 15710TP

FUSE/BREAKER CONNECTOR EXTRACTION TOOL  
 HT15710-01


FUSE/BREAKER SECONDARY LOCK EXTRACTION TOOL  
 HT15710-02

**NOTES:**


- 1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.

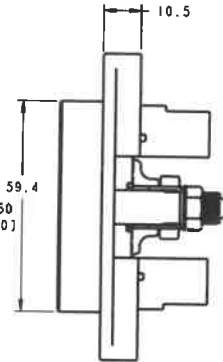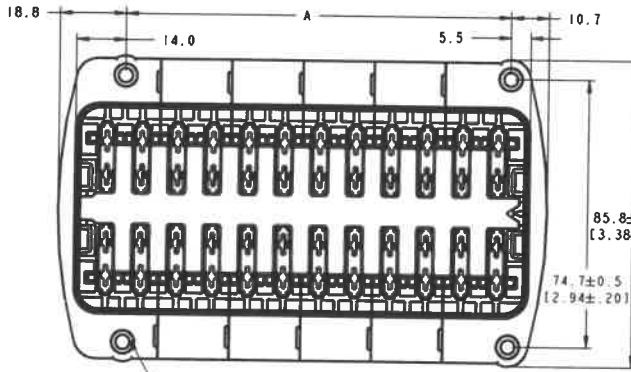

10-32 THREADED INSERTS (4 PLACES)

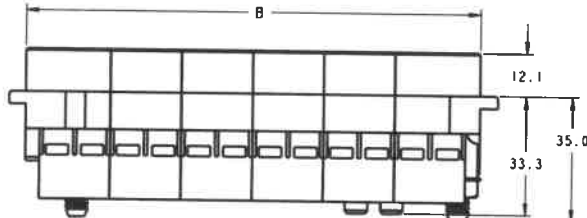

QUICK-CONNECT TERMINALS  
 1/4-20 STUD (2 PLACES)

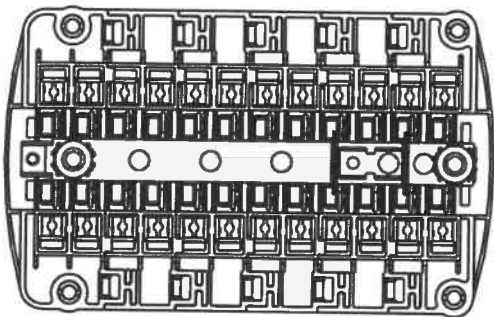

|         | DIM 'A'<br>VALUE | DIM 'B'<br>VALUE |
|---------|------------------|------------------|
| 16 POLE | 67.5             | 87.0             |
| 20 POLE | 87.5             | 107.0            |
| 24 POLE | 107.0            | 126.5            |
| 28 POLE | 127.0            | 146.5            |
| 32 POLE | 147.0            | 166.5            |

**COOPER Bussmann**  
 St. Louis, MO

| TOLERANCES UNLESS OTHERWISE SPECIFIED |                  |
|---------------------------------------|------------------|
| METRIC (mm)                           | ENGLISH (in)     |
| 1 PL DEC: ± .25                       | 2 PL DEC: ± .01  |
| 2 PL DEC: ± .13                       | 3 PL DEC: ± .005 |

| THIRD ANGLE PROJECTION |                         |
|------------------------|-------------------------|
| ANGULAR TOL: ± 2°      | FRACTION TOL: ± 1/64 IN |

|   |   |
|---|---|
| For change history please consult the Bussmann Engineering Change Notice number listed below. | Y |
| Design Units  | Y |

Part Code: Y  
 BU-U09027

Title: RTA 24 POLE TRIPLE BUSS ASSEMBLY  
 Scale: 0.750  
 Revision: 2.1

Date: 17-May-02  
 Created By: Y  
 Part Number: 15713-XX-XX-XXX-SALES  
 Ref. Name: 15713-SALES