


SEARCH KEYWORD, PART NUMBER 



Part Number: 15366021

Old/Legacy Part Number: C122310

SINGLE WIRE SEAL FITS TO 4.0 mm CAVITY

[Share](#) [Print](#) [Contact Us About This Item](#)

GET SAMPLES 




ATTRIBUTES DOCUMENTS ECAD


Attributes

Type SINGLE WIRE SEAL	Hardness (Shore) 50
Outer Diameter (mm) 4.5	Contains Lubricant (Oil Content) Low
Borehole Diameter (mm) 0.95	Restraint Ring No
Length (mm) 6	Min. operating temperature -40°C
Min Cable Outer Diameter (mm) 1.2	Max. operating temperature +140°C
Max Cable Outer Diameter (mm) 1.9	
Color WHITE	


Other Products

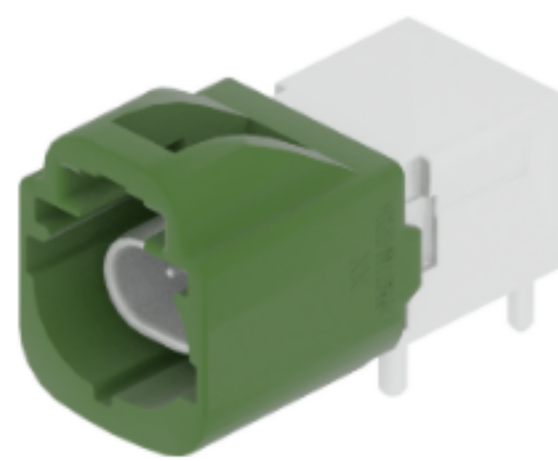

35829171
2 Way Male 0.5 Unsealed Green

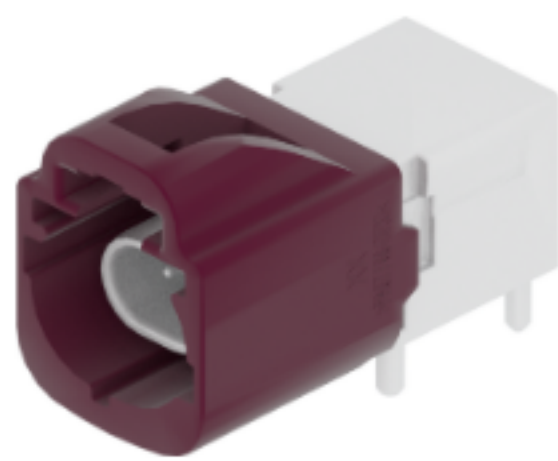

35829170
2 Way Male 0.5 Unsealed Violet

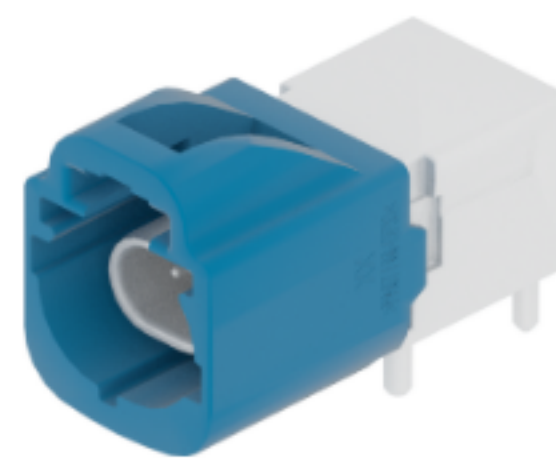


35829169
2 Way Male 0.5 Unsealed Blue

RESOURCE-CENTER-ITEM
COV CONN CLIP CDT BLACK



Next Steps

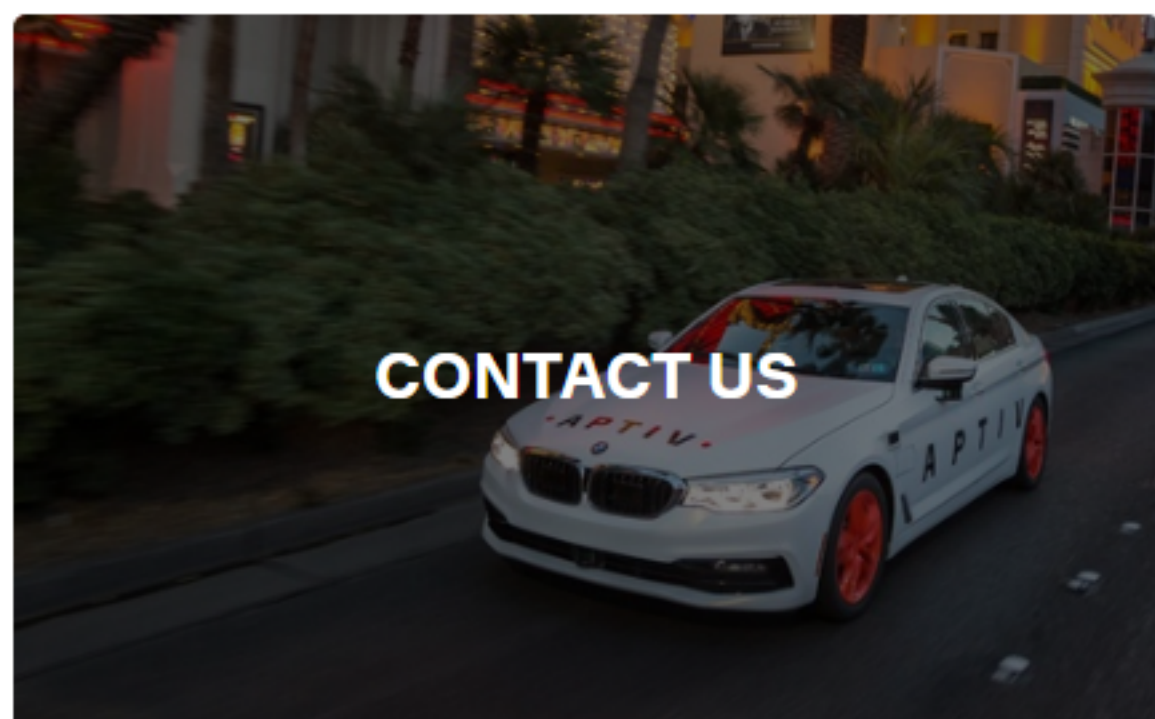

Keep pace with where mobility is going.

See what's next and get the latest updates.

SIGN UP TO GET UPDATES 

Don't worry. We won't flood your inbox or share your email.

INSIGHTS

- EXPLORE ALL ARTICLES
- CASE STUDIES
- MOBILITY INSIDER
- RESEARCH PUBLICATIONS
- WHITE PAPERS

SOLUTIONS

- Advanced Safety
- Connected Services
- Connection Systems
- Connectivity and Security
- Electrical Distribution Systems
- Middleware & DevOps
- Smart Vehicle Architecture
- User Experience
- Vehicle Electrification Systems
- HellermannTyton
- Intercable Automotive Solutions
- Motional
- Winchester Interconnect
- Wind River

CATALOG

ABOUT

- Our Mission
- Our Businesses
- Our Locations
- Our Foundation
- Sustainability
- Suppliers

PRIVACY

- Terms of Use
- Cookie Policy

LEGAL & COMPLIANCE

CAREERS

- INVESTORS
- NEWSROOM
- CONTACT