
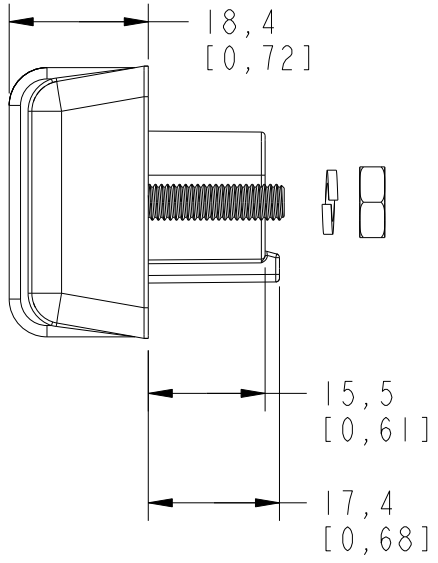
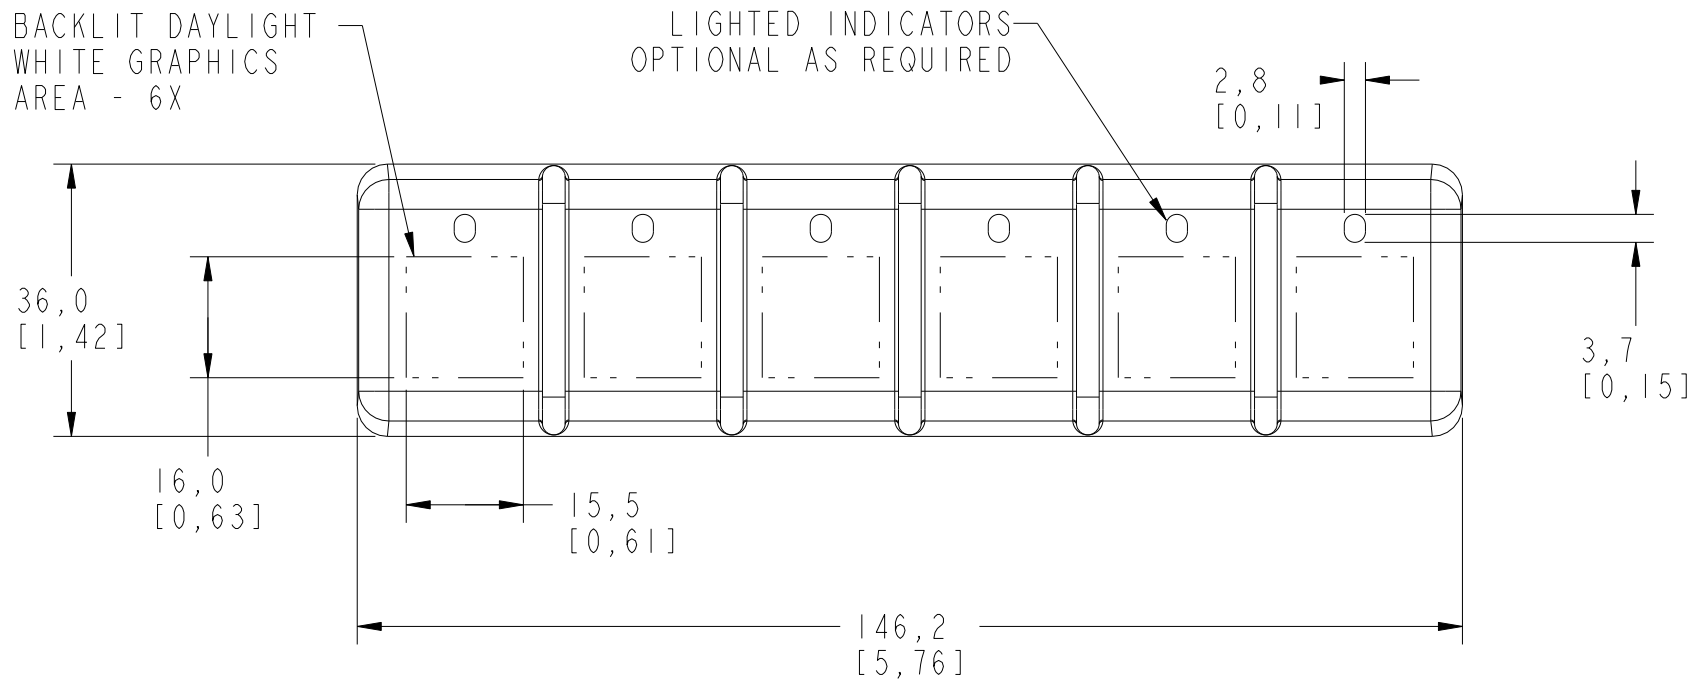
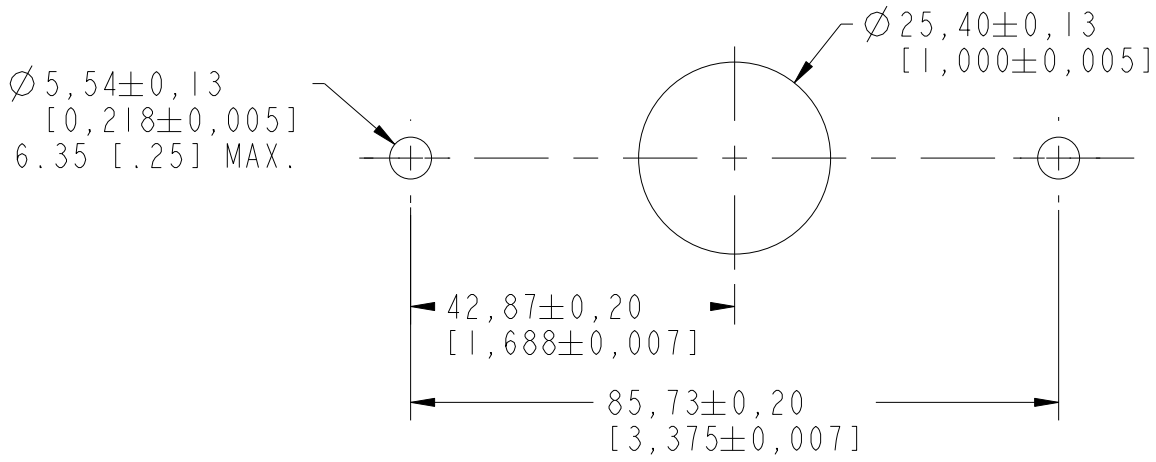
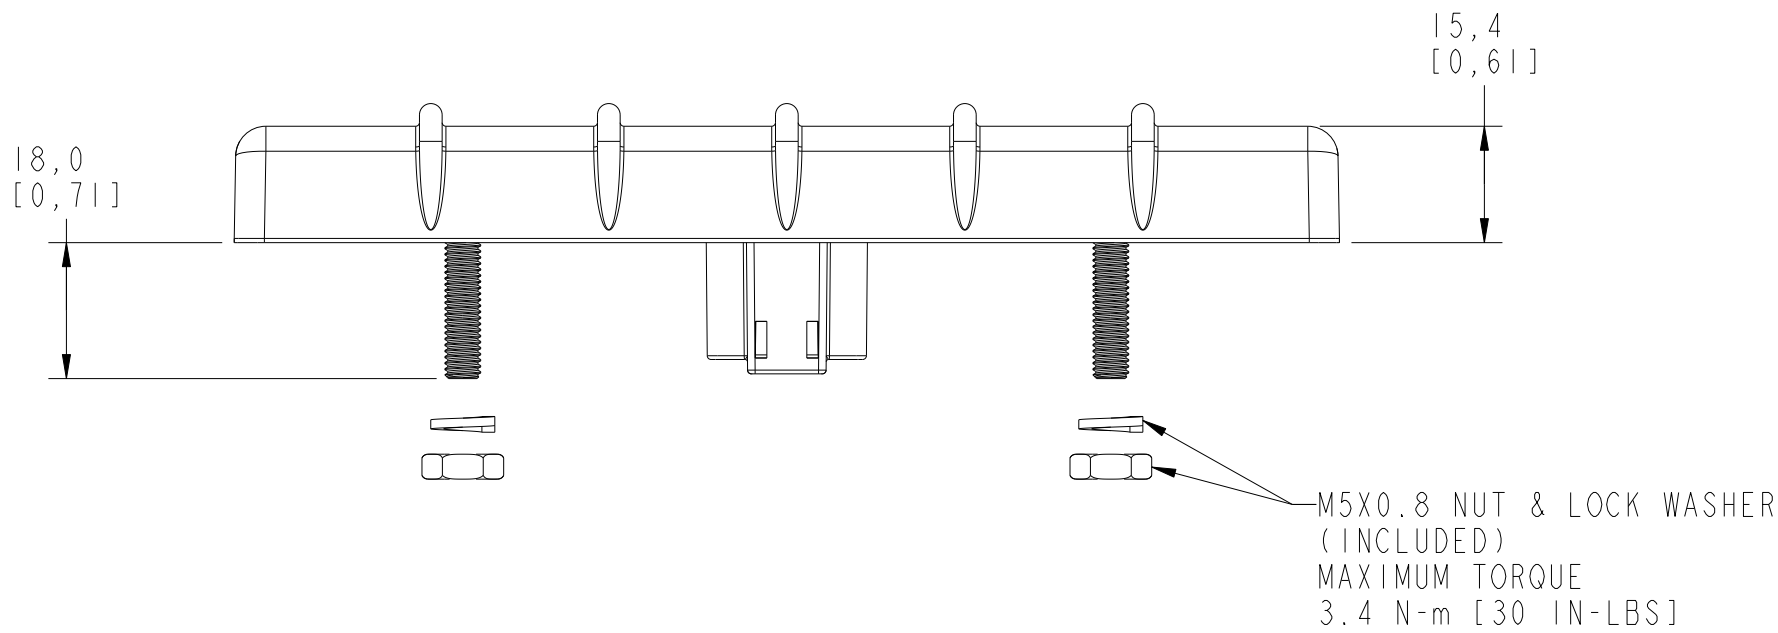


PIN NUMBER

PIN NUMBER	FUNCTION
1	VBATT(12/24V)
2	COMMON
3	CAN HIGH
4	CAN LOW

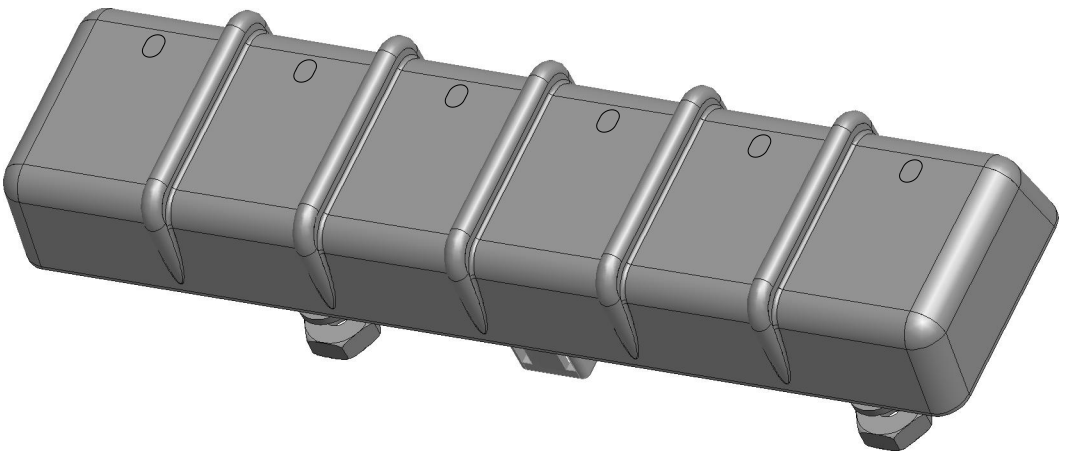

RECOMMENDED PANEL OPENING
(FRONT VIEW)

- NOTES:
- DIMENSIONS SHOWN AS MM [INCH].
 - MATING CONNECTOR: DEUTSCH PLUG DT06-4S, WEDGE LOCK W4S, SOCKET CONTACT 0462-201-16141 (1.0-0.5 MM^2 [16-20 AWG]) HOLE PLUG 0413-217-1605

TOLERANCING		UNLESS OTHERWISE SPECIFIED DIMENSIONS IN MILLIMETERS	DRAFTERDESIGNER X.JP	DATE (YYYYMMDD) 2019/11/22	EATON CORPORATION - CONFIDENTIAL AND PROPRIETARY	
MM Unless Otherwise Specified					NOTICE TO PERSONS RECEIVING THIS DOCUMENT AND/OR TECHNICAL INFORMATION	
DIMENSIONS (MM)	TOLERANCE (MM)	DRAWING IN ACCORDANCE WITH ASME Y14.5M-1994 EXCEPT: TRAILING ZEROS SHOWN, GENERAL TOLERANCE PER BLOCK ABOVE RABS COMPLIANT	ENGINEERING APPROVED DRL	MANUFACTURING	THIS DOCUMENT, INCLUDING THE DRAWING AND INFORMATION CONTAINED THEREON, IS CONFIDENTIAL AND IS THE EXCLUSIVE PROPERTY OF EATON CORPORATION, AND IS HEREBY ON LOAN AND SUBJECT TO RECALL BY EATON AT ANY TIME. BY TAKING POSSESSION OF THIS DOCUMENT, THE RECIPIENT ACKNOWLEDGES AND AGREES THAT THIS DOCUMENT CANNOT BE USED IN ANY MANNER ADVERSE TO THE INTERESTS OF EATON AND THAT NO PORTION OF THIS DOCUMENT MAY BE COPIED OR OTHERWISE REPRODUCED WITHOUT THE PRIOR WRITTEN CONSENT OF EATON. IN THE CASE OF CONFLICTING CONTRACTUAL PROVISIONS, THIS NOTICE SHALL GOVERN THE STATUS OF THIS DOCUMENT. © 2013 Eaton Corporation. All Rights Reserved.	
L<=6.5	±0.15		REVISION DESCRIPTION ▲ ECO # 176599	CHANGE THE OVAL INDICATORS TO 2.8MM WIDE. ADD TOLERANCE TO THE PANEL OPENING VIEW.		
6.5<L<=16.0	±0.20					
16.0<L<=25.0	±0.25					
25.0<L<=40.0	±0.35					
40.0<L<=63.0	±0.40					
63.0<L<=100.0	±0.55	ENGMFG REFERENCE				
ANGULAR X°	±1°					

CHANGE RESPONSIBILITY		
CLASS CODE N/A	SCALE 1:1,000	SHEET 1 OF 1

SIZE
D

DRAWING
NUMBER

KEYPAD, 1X6 DIMENSION DRAWING

REVISION
003

468-1234-FMT-REV 1
TEMPLATE: 468-1214-DIM-REV 1