REVISION				
LTR	DESCRIPTION	ECN	DATE	APPROVED
E	REDRAWN 1)ADD NOTE 1 2)WAS PER GE	11826	6/13/07	BP
	3)WAS PER ZZ-R-765			

(E1)

NOTES:

1) BOOT – MAT'L: SILICONE RUBBER, VMQ, HIGH DUROMETER

PROPERTIES:

HARDNESS: 60±5, SHORE A
TENSILE STRENGTH: 10 MPa. min
ELONGATION: 390%, min
TEAR STRENGTH 29 KN-m, min
COMPRESSION SET: 24%, max at 180 C, 22 hr
RESISTANT TO: WEATHERING, OZONE, CORONA, FUNGUS, SALT SPRAY, AND MOST ACIDS AND LUBRICATING OILS.

APPROVED SUPPLIER: GE TOSHIBA SILICONES TSE2267U.
WITH BLACK COLORANT ADDED FOR -2.

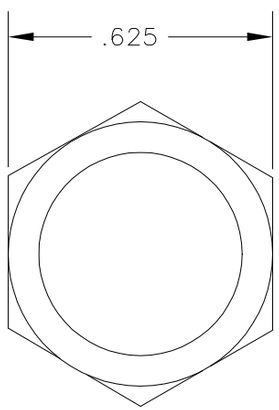

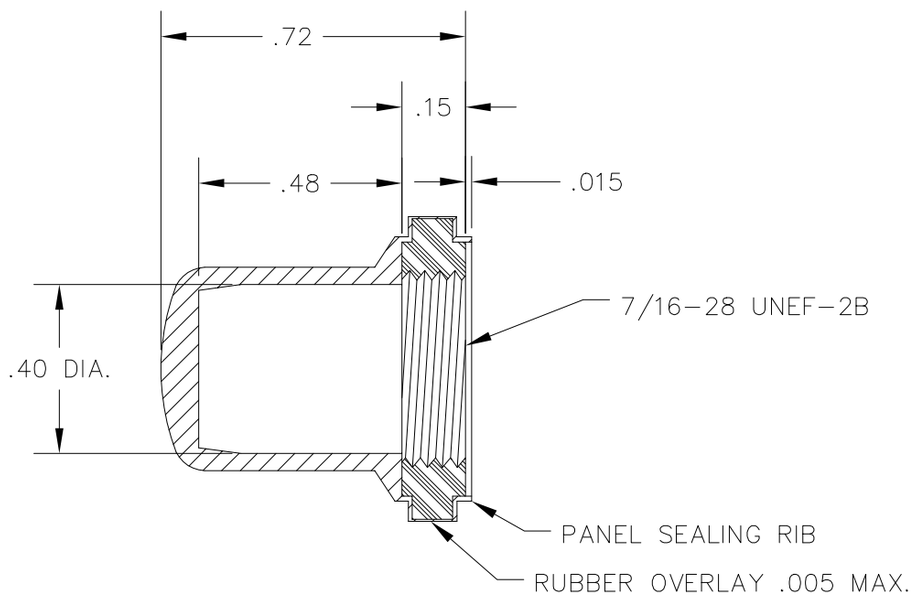

(E2) (E3)

DASH NO.	RUBBER	NUT
-2	SEE NOTE 1	BRASS, NICKEL PLATED
-1	SEE NOTE 1	BRASS, NICKEL PLATED

MATERIAL CHART

THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION AND IS SUPPLIED BY MECHANICAL PRODUCTS, INC., THE OWNER OF SUCH INFORMATION. IN ACCEPTING THE DRAWING, THE USER AGREES THAT IT IS FOR THE USER'S SOLE USE, THAT IT WILL NOT BE REPRODUCED OR DISTRIBUTED TO OTHERS, AND THAT THE DRAWING OR THE INFORMATION CONTAINED THEREIN WILL NOT BE USED IN ANY MANNER DETRIMENTAL TO MECHANICAL PRODUCTS, INC.

MECHANICAL PROPERTIES	
YP	
TS	
EL 2	
RA	
BH	
RH	

NEXT ASS'Y	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ON
DECIMALS .xx ± .01 .xxx ± .010
ANGLES ± 1°

MATERIAL
SEE CHART

DFTM.	MHB	6/11/07
CHECK	BP	6/13/07
PROJ. ENG.	BP	6/13/07
DIR. OF ENG.		
MFG.		
Q.C.		
SEE ECN FOR ABOVE SIGNATURES		
CONTRACT NO.		

MECHANICAL PRODUCTS COMPANY
JACKSON, MICHIGAN U. S. A. 49202

BUSHING SEALING BOOT

B | 76374 | EXP. NO. 1600-382-( )

SCALE 3X | WEIGHT | SHEET 1 OF 1