


REVISIONS				
REV	ECO	DESCRIPTION	DATE	BY
B	1929	CHANGE TO METRIC DESIGN	9/17/97	GF
C	2356	CHANGE DRAWING FORMAT	9/17/97	GF
D	2487	COLOR TOP OF 'A' POST BLACK		

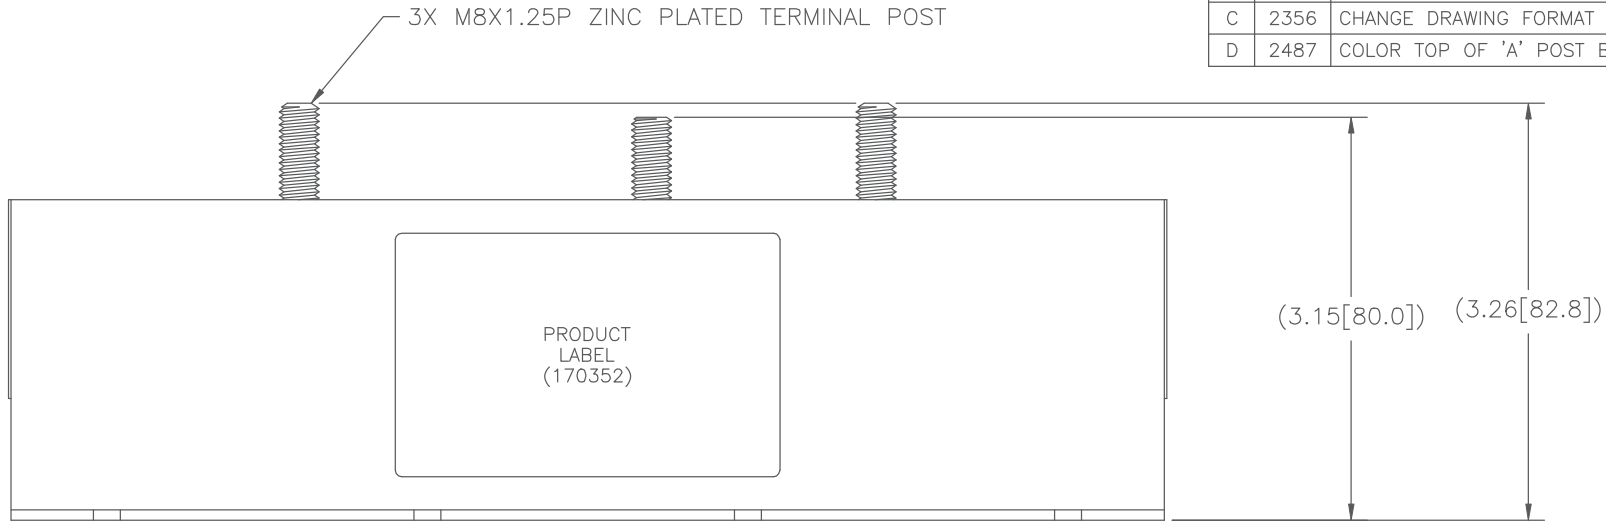

SPECIFICATIONS

MODEL NO: 2002

DESCRIPTION: MULTI-BATTERY ISOLATOR

SYSTEM OPERATION: 6-50 VOLTS DC

MAX. CURRENT: 200 AMP


OPERATION TEMPERATURE: -40°C TO +85°C AMBIENT

INSULATION TO GROUND: 500V 60 HZ AC MIN.



GROUND TYPE: NEGATIVE

FINISH: BLUE ANODIZED
TO WITHSTAND 336 HR SALT SPRAY
PER LATEST REVISION OF ASTM B117.

HARDWARE: TERMINAL AND MOUNTING HARDWARE INCLUDED.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM]			
TOLERANCES ARE: .XX ± 0.10 [.X ± 2.5] .XXX ± 0.030 [.XX ± 0.76] ∠ ± - DO NOT SCALE THIS DRAWING			
APPROVALS		TITLE	
DATE		MODEL: 2002 ISOLATOR, 200AMP, 1 INPUT, 2 BATTERY SPECIFICATION/OUTLINE	
DRAWN	GF	5/14/96	
ENGR			
APPR			
SIZE	B	CAGE CODE NO.	DWG NO.
		55156	2002
SCALE: 1/1		FILE: 2002D1	SHEET 1 OF 2
			REV D

REVISIONS				
REV	ECO	DESCRIPTION	DATE	BY
		SEE SHEET 1		

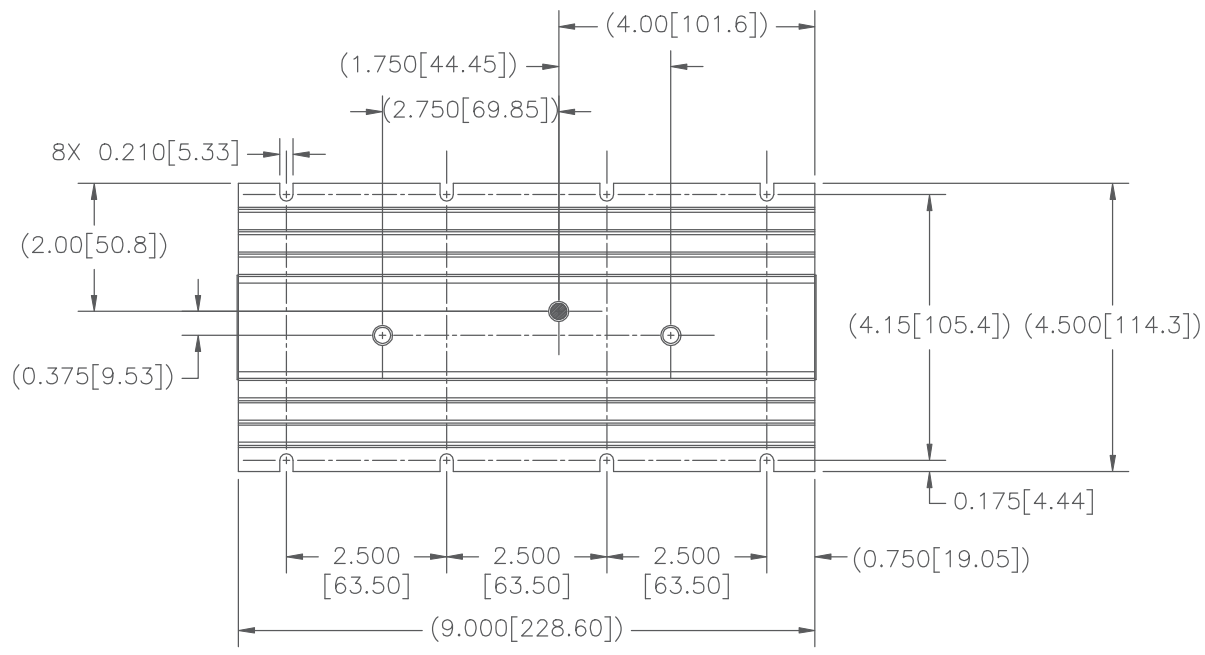

SCALE: 1/2

TITLE MODEL: 2002 ISOLATOR, 200AMP, 1 INPUT, 2 BATTERY SPECIFICATION/OUTLINE				
SIZE B	CAGE CODE NO. 55156	DWG NO. 2002	REV D	
SCALE: 1/1	FILE: 2002D2	SHEET 2 OF 2		