



TERMINAL IDENTIFICATION BY NO. & COLOR
IMPRINTED ON BACK OF MOLDED PLUG.

FORMERLY 975

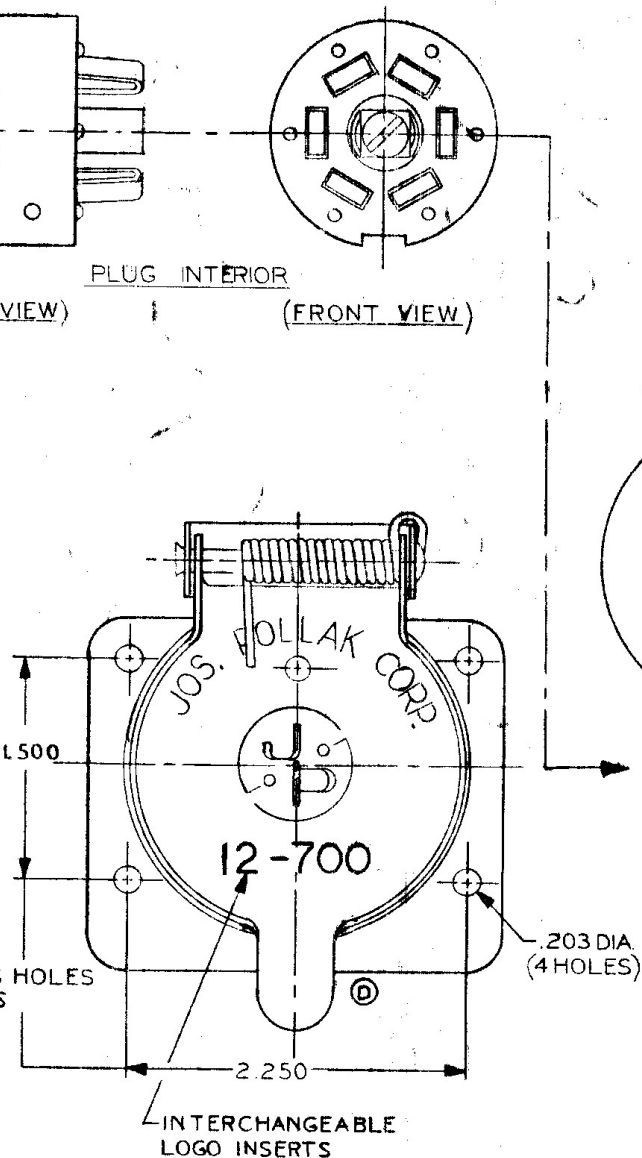

NOTES:

- 1) STRAIN RELIEF CLAMPS TO BE SCREWED DOWN ONTO RUBBER SLEEVE TO PREVENT SLEEVE FROM FALLING OUT IN SHIPMENT.
- 2) ALL STEEL PARTS TO BE .00035 CADMIUM PLATE WITH CLEAR CHROMATE COATING AND MUST WITHSTAND A MIN. OF 48 HOURS SALT SPRAY TESTING
- 3) MATERIALS:
SHELL, COVER, HOLDING PIN, LOCKWASHER, RELIEF CLAMPS, CLAMP SCREWS, PLUG RETAINING SCREWS & CENTER SCREW, STEEL, PLUG INTERIOR, PHENOLIC, INSULATING RETAINER, NYLON, SLEEVE, RUBBER, COVER SPRING, STAINLESS STEEL, CENTER TERMINAL, BRONZE, CENTER TERMINAL POST, TERMINAL PLATES, FLAT TERMINALS, BRASS, TERM. SCREWS, STEEL.
- 4) SOCKET WILL FIT A 2.125 DIA. MOUNTING HOLE.

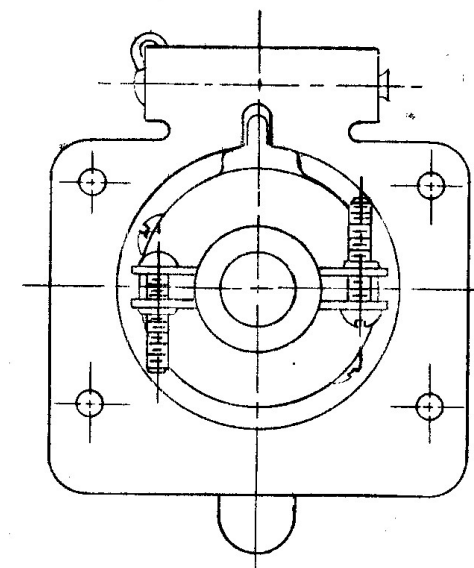

FORMERLY 975

DRAWN BY J.A.M. CHECKED BY

REVISIONS - AUTHORIZED BY - CHANGED BY - DATE

REVISIONS	AUTHORIZED BY	CHANGED BY	DATE
1	KJB	JAM	8-15-78
2		LVC	9-19-79
3	K.H	NCT	9-30-79

APPROVED BY

SCALE FULL

FRACTIONS ±

DECIMALS ±

ANGLES ±

REVISIONS - AUTHORIZED BY - CHANGED BY - DATE

ECN	REVISIONS	AUTHORIZED BY	CHANGED BY	DATE
	F			
	G			
	H			
	J			
	K			

MATERIAL

FINISH

TITLE

SOCKET

NO. 12-703