


MARINE MASTER® UL LISTED 1426 AND CSA TEW/AWM TINNED WIRE/CABLE – MULTI CONDUCTOR

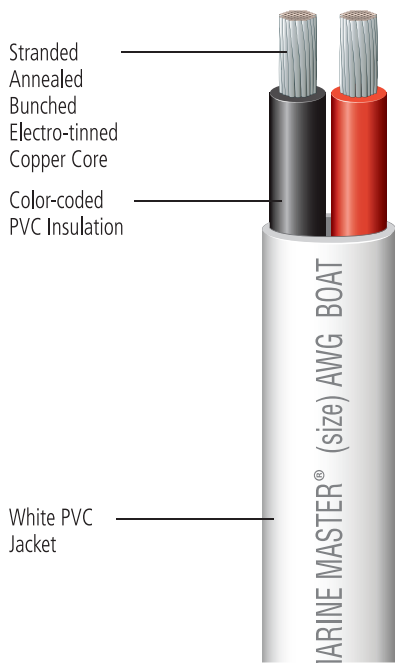

UL/CSA Listed, multi-conductor tinned wire with white jacket is ideal for use in the high corrosive environment of marine applications. Special electro-tinned, copper strands also increase protection against corrosion for recreational vehicles, automotive, trucks, and trailers. Tinned copper stranding is extremely flexible for easy routing through marine applications and easier to solder than bare copper. Flame retardant, PVC insulation is highly resistant to water, oil, grease, gasoline, and other damaging solvents. High voltage tolerance of up to 600 volts adds to versatility to its use in multiple marine and other suitable applications.

Voltage: Rated at 600 Volts

Temperature: Rated at 105°C (221°F) dry and 75°C (167°F) wet

Specifications: Meets DOT and Coast Guard specs for electrical systems

- Spiral striping of inner wires of this product is available. Please refer to page 114 for details.



Print Legend 2 conductor:

EPM MARINE MASTER® (size) AWG BOAT CABLE BC-5W2 600V 105C DRY 75C WET (UL) --- CSA LL109117 TEW 2C/(size)AWG 105C 600V FT1 OR AWM I/II A/B 105C 600V W75C FT1

Print Legend 3 conductor:

EPM MARINE MASTER® (size) AWG BOAT CABLE BC-5W2 600V 105C DRY 75C WET (UL) --- CSA LL109117 3C/(size)AWG AWM I/II A/B 105C 600V W75C FT1

WARNING: Cancer and Reproductive Harm www.P65Warnings.ca.gov

18/2 Gauge

Stranding 16/30
Nominal OD 0.180 x 0.285

Length	Packaging	MC Qty.	Weight	Red/Black	Yellow/Red
100'	Spool (J)	1	3.55 lbs.	31058	31062
500'	Reel (A)	1	16.76 lbs.	31059	31063
1000'	Spool (B)	1	33.70 lbs.	31060	31064
7000'	Reel (F)	7000'	238.00 lbs.	31061	97411

Note: letter in parenthesis designates spool ID, see page 115.

16/2 Gauge

Stranding 26/30
Nominal OD 0.195 x 0.320

Length	Packaging	MC Qty.	Weight	Black/White	Red/Black	Yellow/Red
100'	Spool (J)	1	4.86 lbs.	04509	04536	04533
500'	Reel (B)	1	24.64 lbs.	04510	04065	04534
1000'	Reel (C)	1	49.32 lbs.	04511	97743	04535
6000'	Factory Reel (F)	6000'	277.00 lbs.	14908	97918	97921

Note: letter in parenthesis designates spool ID, see page 115.

14/2 Gauge

Stranding 41/30
Nominal OD 0.211 x 0.352

Length	Packaging	MC Qty.	Weight	Black/White	Red/Black	Yellow/Red
100'	Spool (K)	1	6.14 lbs.	04506	04537	04530
500'	Reel (B)	1	30.11 lbs.	04507	04064	04531
1000'	Reel (C)	1	61.50 lbs.	04508	97744	04532
5000'	Factory Reel (F)	5000'	293.00 lbs.	14907	97917	97920

Note: letter in parenthesis designates spool ID, see page 115.

