



Model Number: **MWL-14-A**

Low Profile Surface Mount Work Light
12/24 VDC 820 Lumens


820 Lumens

Function

FMVSS 108 Standard..... **No**
DOT/SAE Spec..... **N/A**
Functions..... **Eng compartment**
Functions Comments..... **Mounting: 2 ea 1/4" dia holes 5.5" on centers. Rated 300F (150C)
Polarity V1= Black(+)Blue(-) V2= Black(-)Red(+)**
Legal Heading..... **N/A**
Origin Product..... **Taiwan**
Dimensions..... **Dimensions: 5.9" x 2.2" x 0.9" deep
uses Gore-tex vapor vent**

Specification

No.Leds.....	8	Termination.....	2 wire, 11" w/ sleeving
Led Type.....		Connector Supplied.....	No
Led Color.....	white	Gasket.....	No
Color Temp.....	6700K	Mounting Screws.....	2 ea supplied
Beam Pattern.....	Flood	Wire Gauge.....	18 AWG
Voltage (DC).....	12 / 24 VDC	Wire Color.....	V1= Black(+)Blue(-) V2= Black(-)Red(+)
Amperage Draw.....	12V/0.8A - 24V/0.4A	Individual Pack.....	
Polarity Sensitive.....	Yes	Master Pack.....	40
Lumens.....	820 lm	Shipping Weight.....	.539
Lens Material.....	Glass, 3 mm thk	Warning Label.....	
Maxxshield Coat.....		Warranty.....	5 Years
Body Material.....	Cast aluminum	Accessories.....	
Operating Temp.....	-40 C to + 135 C		
Ingress Protection (IP).....	66		

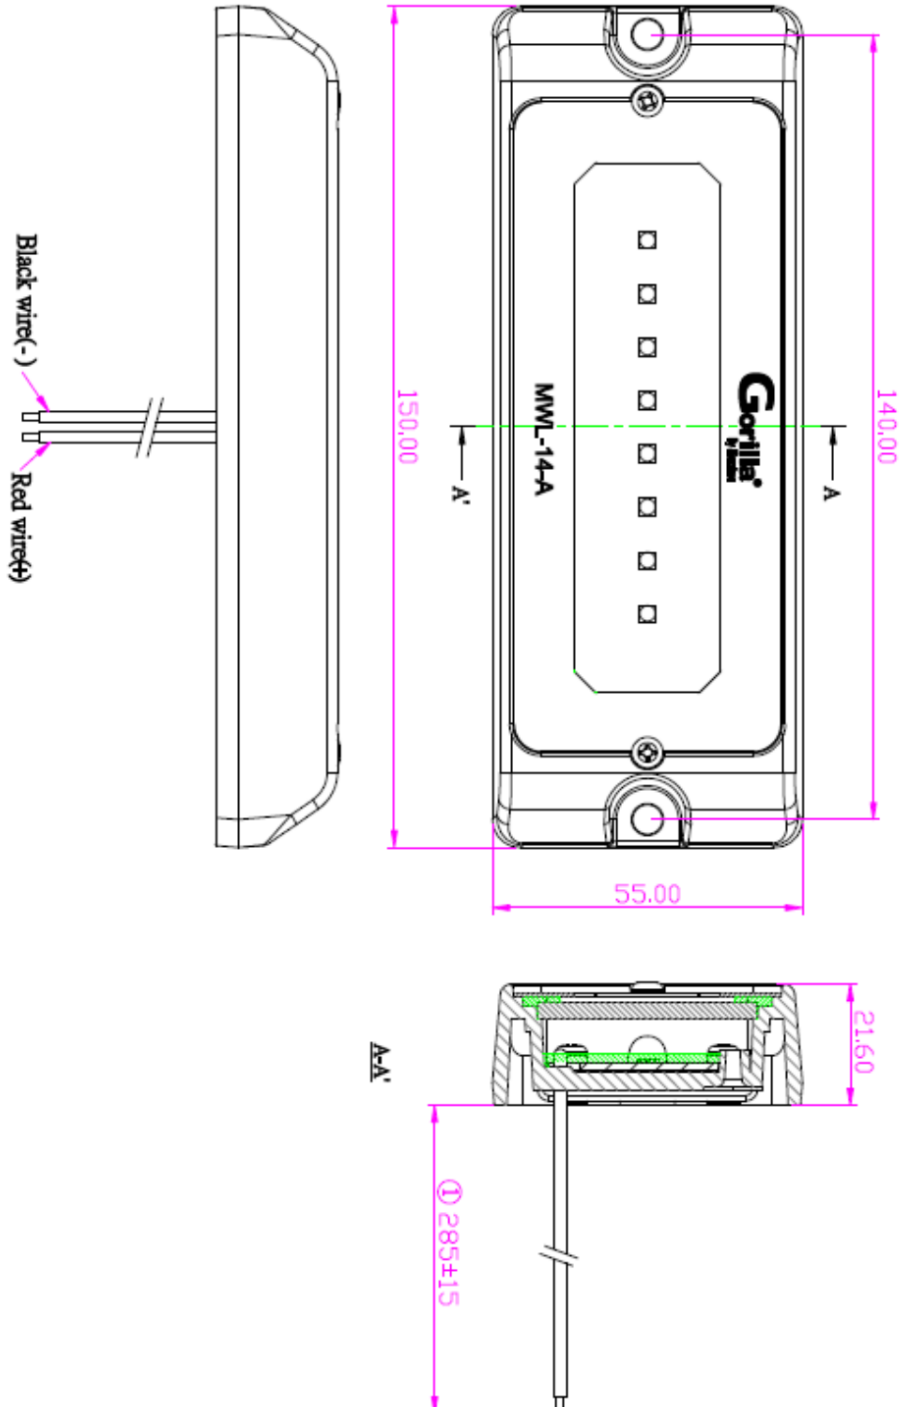

In an effort to continuously improve product performance and reliability, the specifications and product are subject to change without prior notice. Maxxima is a registered trademark of the PANOR CORPORATION