
POLLAK

SWITCHING PRODUCTS DIVISION
300 DAN ROAD, CANTON MA, 02021

DRAWING NUMBER
52-613

REVISIONS - AUTHORIZED - CHANGED - DATE			
RELEASE TO PROD. PER ECO K0910		CMc	7-5-11

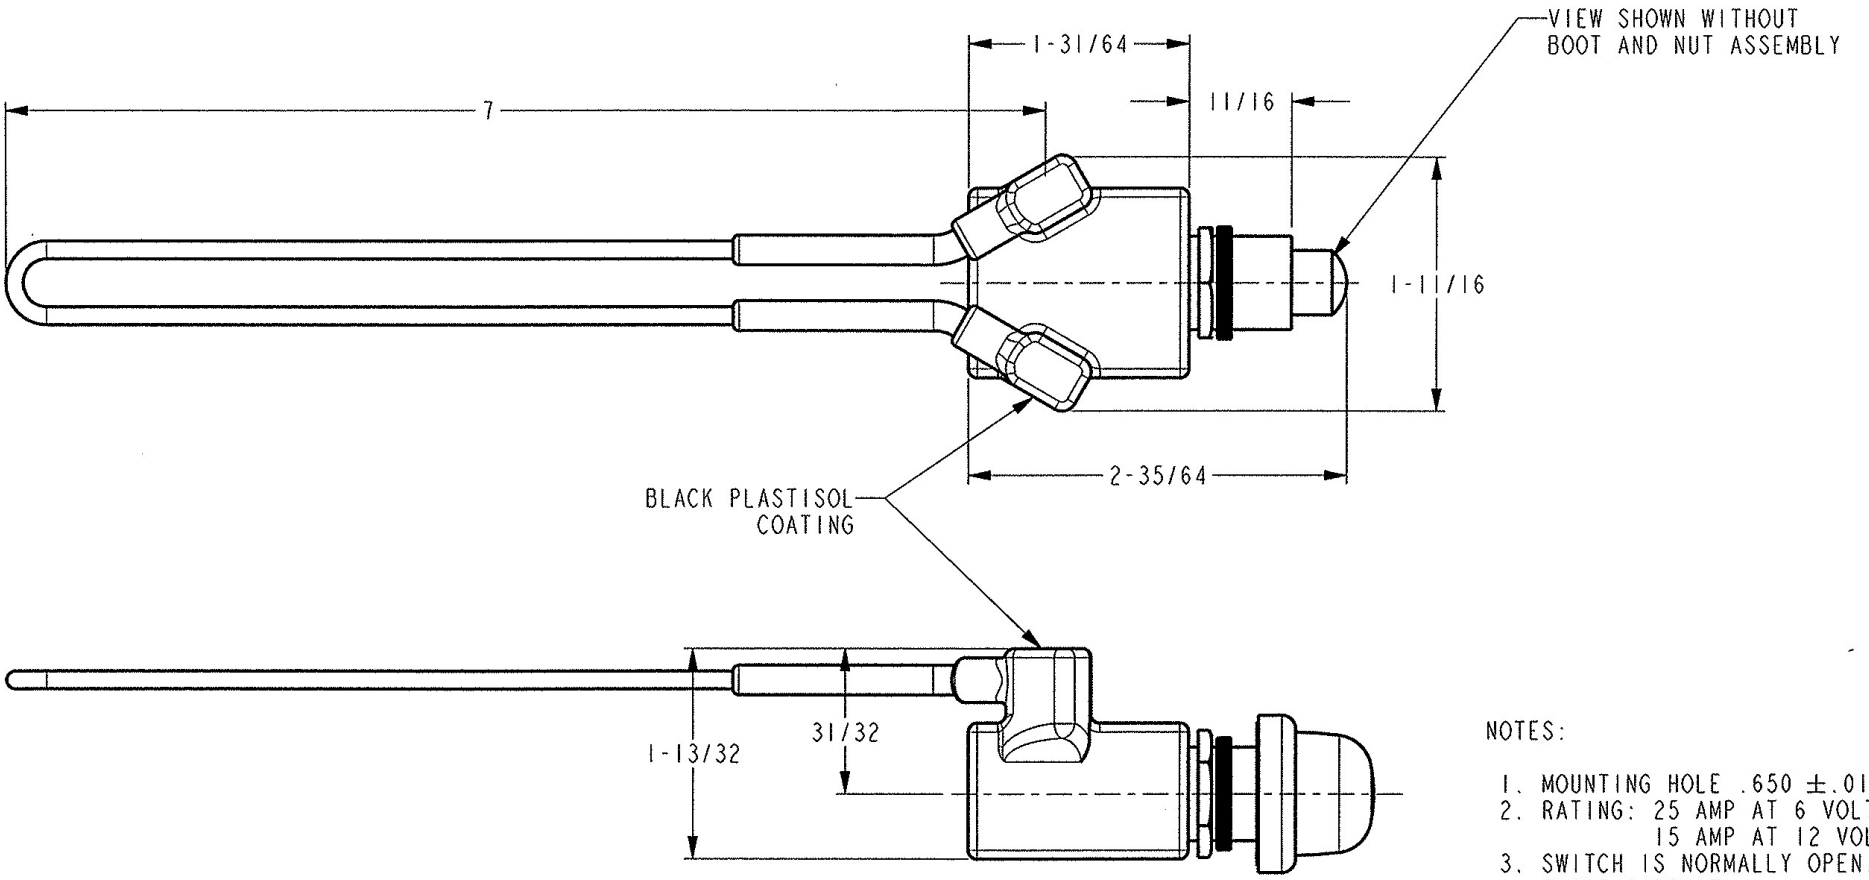

NOTES:

1. MOUNTING HOLE .650 ±.01 DIA.
2. RATING: 25 AMP AT 6 VOLTS
   15 AMP AT 12 VOLTS
3. SWITCH IS NORMALLY OPEN. PUSH TO CLOSE CIRCUIT
4. SWITCH IS COATED.
5. ALL DIMENSIONS ARE FOR REFERENCE ON

TE: PARTS AND COMPONENTS MUST COMPLY WITH POLLAK SQA POLICY

DOCUMENT CONTAINS PROPRIETARY INFORMATION
SUCH INFORMATION MAY NOT BE DISCLOSED TO
FOR ANY PURPOSE OR USED FOR MANUFACTURING
SES WITHOUT WRITTEN PERMISSION FROM POLLAK.

WHERE USED

3rd ANGLE PROJECTION

UNSPECIFIED TOLERANCES

X.X : ±
X.XX : ±
X.XXX : ±
ANGLE : ±

MATERIAL

FINISH

DESIGNED BY	DRAWN BY	CHECKED BY	APPROVED BY
M.OREILLY	C.McCALL		7/13/

FILE NAME: 52-613_SW_PUSH_BTN_COATED

SCALE: 1:1

DATE: Jul-05

DRAWING TITLE: MOMENTARY NORMALY OPEN PUSH BUTTON SW COATED

DRAWING NO.: 52-613

REV B

ANSI 1:1 PLOTT
11.00 X 17.00 I
279.4 X 431.8 M