

# 5269-C



Straight Blade Connector, 15 Amp, 125 Volt, Industrial Grade - Black & White

15 Amp, 125 Volt, NEMA 5-15R, 2P, 3W, Connector, Straight Blade, Industrial Grade, Grounding - Black/White

**ROHS Compliant :** Yes

Leviton's Black & White line of industrial grade plugs, connectors, flanged inlets, and outlets offer superior performance, long lasting reliability and features that are backed by a lifetime warranty:

- One piece contacts reduce friction and overheating
- Unique cord clamp accepts wide range of cord sizes (.245"-.700")
- Rugged nylon construction resists impact, sunlight, chemicals, and rough use
- Industry exclusive lifetime warranty
- Ideal for extension cords and generators


**Color :**  Black-White

**UPC Code :** 078477795316

**Country Of Origin :** Mexico

**NEMA :**  5-15R

### Available Colors :

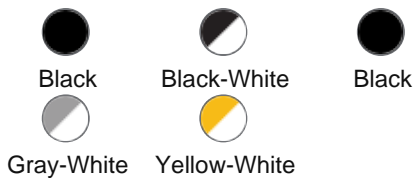

### Technical Information

#### Environmental Specifications

**Environment :** Dry

**Flammability :** Rated HB or better UL94

**Operating Temperature :** -40° C to 60°C

#### Material Specifications

**Assembly Screws :** Steel, Zinc Plated

**Back Cover :** Thermoplastic

**Blades/Contacts :** Solid Brass

**Body Material :** Impact Modified Nylon

**Clamp Insert :** Nylon

**Color :** Black-White

**Cord-Clamp :** Nylon

**Terminal Screws :** Brass

**Wire Module :** Nylon

#### Mechanical Specifications

**Amperage :** 15 A

**Cord Range :** 0.230 to 0.685

**Current Interrupting :** Certified for current interrupting at full rated current

**Dielectric Voltage :** Withstands 2000V per UL498

**Grounding :** Grounding

**Pole :** 2

#### Product Features

**Brand :** Black and White

**Color :** Black-White

**Device Type :** Straight Blade Connector

**NEMA :** 5-15R

**Product ID :** Ratings and NEMA I.D. permanently marked on device

**Temperature Rise :** Max 30C after 250 cycles OL at 200 percent rated current

**Terminal Accom. :** 18-10 AWG

**Terminal ID :** Brass-Hot, Green-Ground, Silver-Neutral

**Torque Range :** 10-14 in-lbs

**Voltage :** 125 VAC

**Wire :** 3

Standards and Certifications

**ANSI :** C-73

**CSA C22.2 No. 42 :** File LR-406

**NEMA :** WD-6


**NOM :** 057

**UL 498 :** File E13399

**UL Fed Spec WC-596 :** File E13393

**Warranty :** Limited Lifetime Warranty

## Dimensional Drawing



## SPECIFICATION SUBMITTAL

<b>JOB NAME:</b> <input type="text"/>	<b>CATALOG NUMBERS:</b> <input type="text"/>	<input type="text"/>
<b>JOB NUMBER:</b> <input type="text"/>	<input type="text"/>	<input type="text"/>

### Leviton Manufacturing Co., Inc

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S. T. Monday-Friday): +1-800-824-3005

### Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 · FAX: +1-800-824-3005 · [www.leviton.com/canada](http://www.leviton.com/canada)

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52) 5386- 1797 · [www.leviton.com.mx](http://www.leviton.com.mx)

**Visit our Website at: [www.leviton.com](http://www.leviton.com)**

© 2024 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

**Leviton has a global presence.**

If you would like to know where your local Leviton office is located please go to:  
[www.leviton.com/international/contacts](http://www.leviton.com/international/contacts)

**© 2024 Leviton Manufacturing Co., Inc.**