PART NO. AND CH. CODE	③ W_1 ±0.4	③ W_2 ±0.4	③ H_1	③ H_2	X	A	B	WIRE SIZE
7116-4025,Ⓒ ② (7B16-4025 Ⓒ)	2.30	5.20	(2.19)	(4.21)	0.50	12.50	3.00	AVS 0.3~AVS 0.5 EQUIVALENT
7116-4026,Ⓒ ② (7B16-4026 Ⓒ)	3.00	5.30	(2.91)	(4.08)	0.80	12.50	3.00	AVS 0.5~AVS 1.25 EQUIVALENT
7116-4027,Ⓒ ② (7B16-4027 Ⓒ)	4.20	6.00	(4.06)	(5.09)	1.00	13.00	2.00	AVSS 2 EQUIVALENT

注記

② 1. ( ) 内品番は、エアバック回路及び
特別管理回路に使用する時に適用すること。

③ 2. 適用ゴム栓品番： 7158-3006-90 ETC.


⑤ 3. 嵌合オスターミナル ： 7114-4025 ETC. (7B14-4025 ETC.)


NOTES

② 1. PART NUMBERS IN PARENTHESIS SHALL BE USED FOR AIR BAG(A/B) CIRCUITS AND OTHER CIRCUITS DESIGNATED FOR SPECIAL MONITORING.

③ 2. APPLICABLE RUBBER STOPPER NO. : 7158-3006-90 ETC.

⑤ 3. MATING MALE TERMINAL : 7114-4025 ETC. (7B14-4025 ETC.)

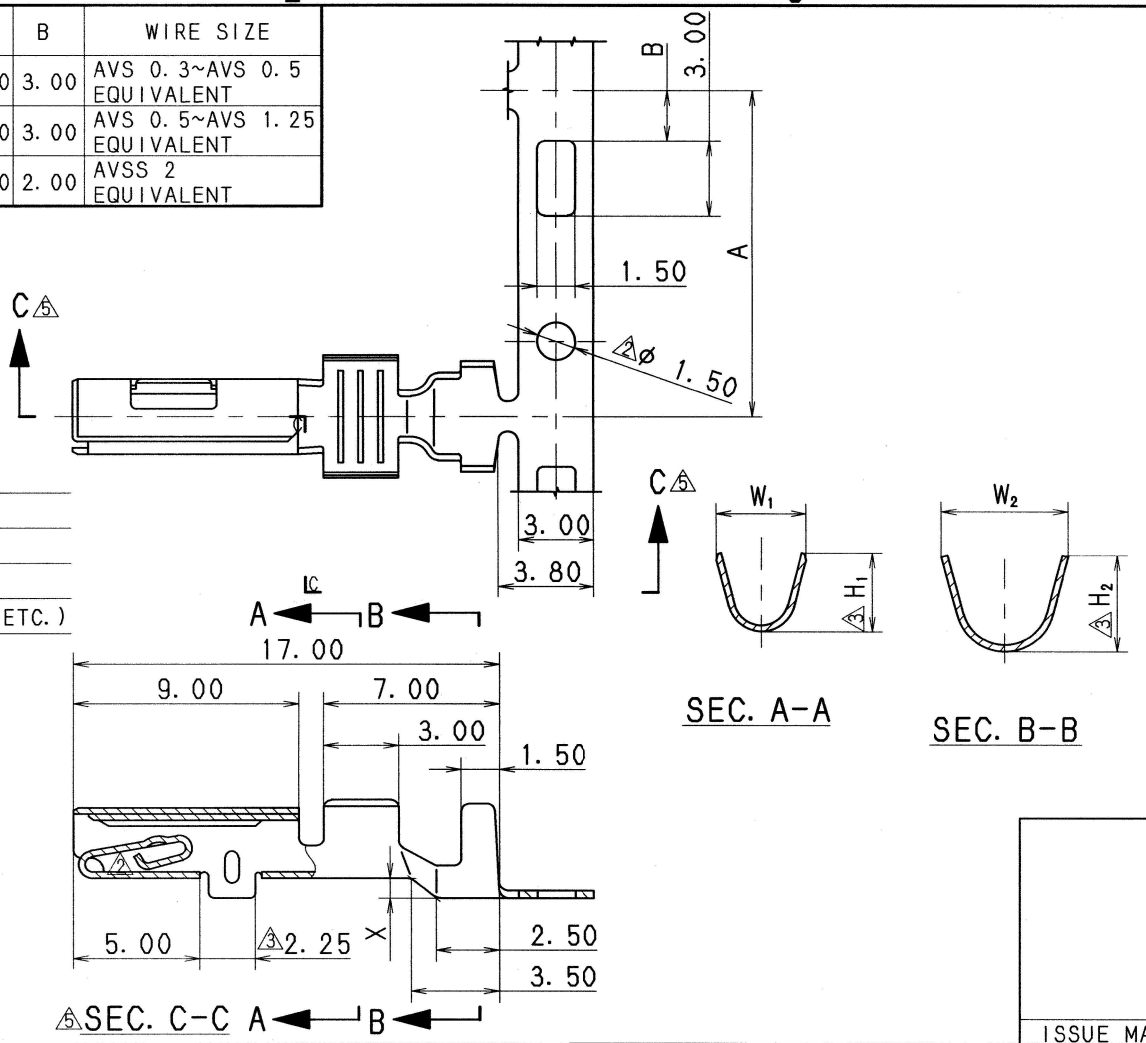



LET	DATE	REVISION RECORD	NO.	CHKD
⑤	05/11/10	CHANGED PART NAME. ETC.	C05-ZF20	T. O
④	00/11/08	CHANGED FORM & DIMENSION	C00-M342	Y. S
③	98/07/14	ADDED DIMENSION	C97-N456	H. K
②	97/05/26	CHANGED FORM & ADDED A/B PART NO. Ⓒ	C97-L981	S. S
①	96/01/09	CHANGED DIMENSION	C95-M905	T. M
	88/07/18	NEW	8MC-0809	Y. S

GENERAL TOLERANCE							
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30′	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30′	0.1
Ⓒ	±0.3	±0.5	±0.8	±1.4	±2	±30′	0.15

SPECIFIED | MASS g

CUSTOMER		
CUSTOMER PART NO.	CUSTOMER DWG NO.	
OFFICE	TRIAL PART NO.	
VENDOR		
VENDOR NO.		

DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
R	NEW	88/07/12	mm	5:1	3

APPROVED	CHECKED	CHECKED	DESIGN	DRAWN
			M. TSUJI	O. DAR
05.11.25	05.11.24	05.11.23 05.11.15	87/08/26	05/11/10

ISSUE MARK

MATL. SPEC.	COPPER ALLOY (t=0.25)
TREAT. & FIN.	TIN PLATING
NAME	⑤ 2.3Ⅱ SEALED TERMINAL FEMALE
PART NO. CH. CODE	7116-4025 ETC. (7B16-4025 ETC.)②
DWG NO.	7116-4025:R
SET DWG NO.	

YAZAKI CORPORATION