



SERIES 32

RAISING THE BAR
MP - COUNT ON IT

Type I, II & III Circuit Breakers

3 - 50 Ampere

Auto, Modified & Manual Reset

Ignition Protected

Black Reset Button

**Amp Rating Color Code
Between Terminals**




SUPERIOR CIRCUIT PROTECTION

www.mechprod.com

Series 32 Features


3 to 50 Ampere
 SAE Type I, II, & III Circuit Breakers
 Auto, Modified & Manual Reset
 Ignition Protected
 Black Reset Button
 Amp Rating Color Code Between Terminals

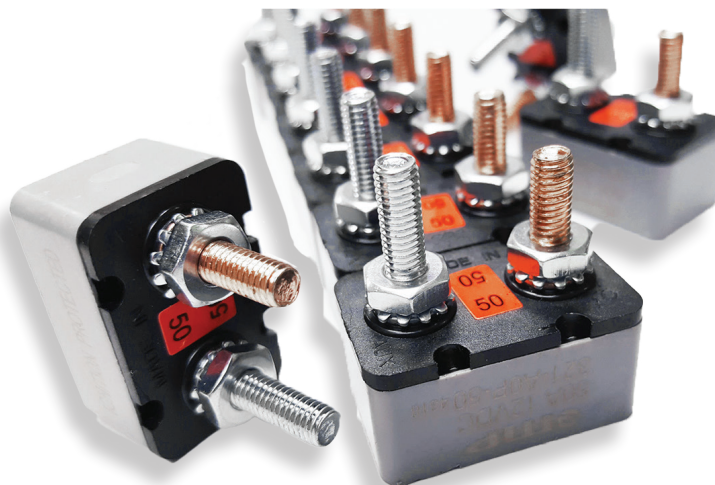


Series 32 Specifications

Standard Amp Ratings	3, 4, 5, 6, 8, 10, 15, 20, 25, 30, 35, 40, 50 Amp
Rated Voltage	Type I & II - 14 VDC Type III - 28 VDC
Dielectric Strength	1,500VAC
Interrupt Capacity	2500A @12 VDC
Overload Reset Capacity	6x rated current
Operating Temperature	-40 to +85°C
Terminations	#10-32 Thread Options
Terminal Torque	24in-lb max.
Regulatory	Complies with SAE Standard J553 & J1171 (Ignition Protected) Ingress Protection: IP66 (MS & PS covers only) ROHS Compliant

Typical Trip Curve

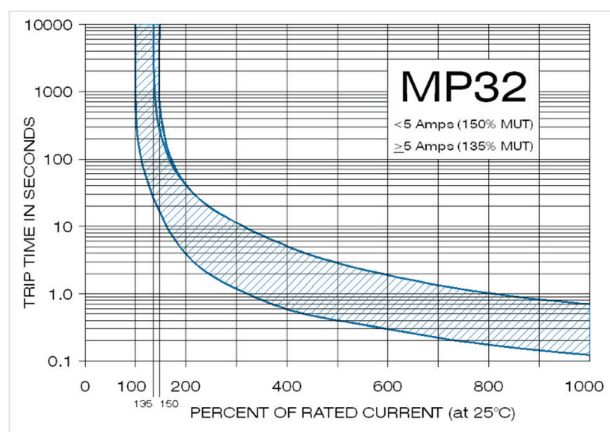

Ambient Temperature Correction

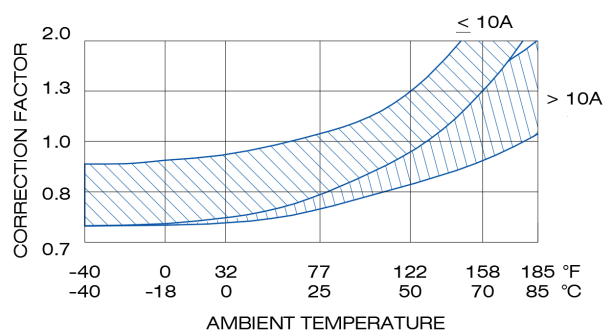


1112 N. Garfield St. Lombard, IL 60148 helpme@mechprod.com
 phone 630 | 953 | 4100 fax 630 | 953 | 4110 www.mechprod.com


Specifications subject to change

QC-4013-H

Series 32 Physical Configuration

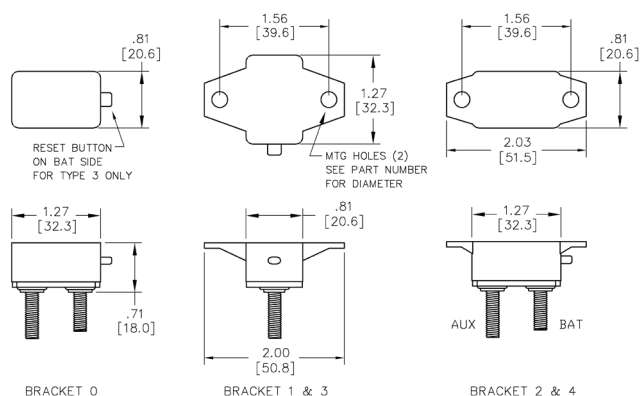


Type 1 & 3 - Plastic Cover

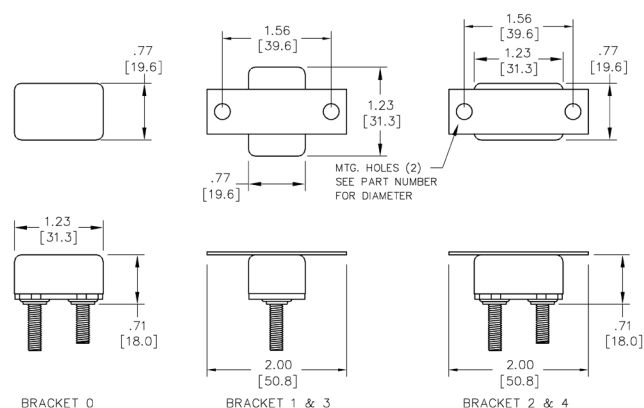


Type 1 & 2 - Metal Cover

Series 32 Accessories

- Protective Boot
- Copper busbar 4 to 12 position
- Nylon mounting bracket 4 to 12 position


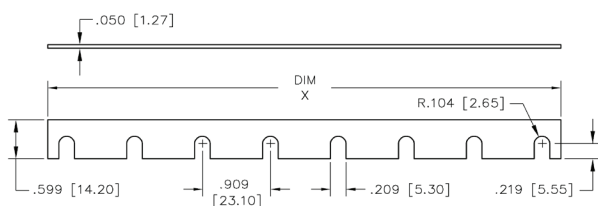


Busbar Options		
MP P/N	DIM "X"	# of Positions
320-402-2	1.41 [35.8mm]	2
320-402-4	3.23 [82.1mm]	4
320-402-6	5.05 [128.3mm]	6
320-402-8	6.87 [174.5mm]	8
320-402-10	8.69 [220.7mm]	10
320-402-12	10.51 [267.0mm]	12

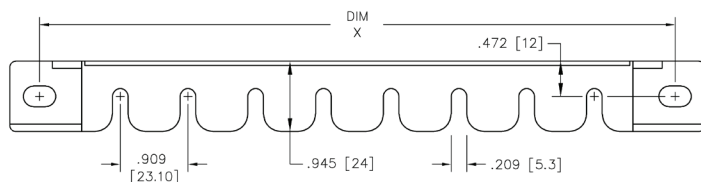

Bracket Options		
MP P/N	DIM "X"	# of Positions
320-401-4	4.89 [124.2mm]	4
320-401-6	6.71 [170.4mm]	6
320-401-8	8.53 [216.7mm]	8
320-401-10	10.35 [262.9mm]	10
320-401-12	12.169 [309.1mm]	12


p/n 32-BR = Boot, Red

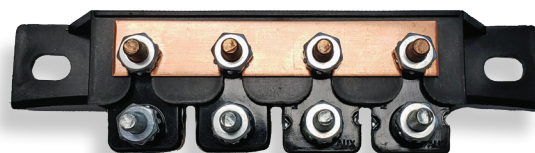

p/n 320-401-4 & 320-402-4

Series 32 Part Numbering Guide

P/N:

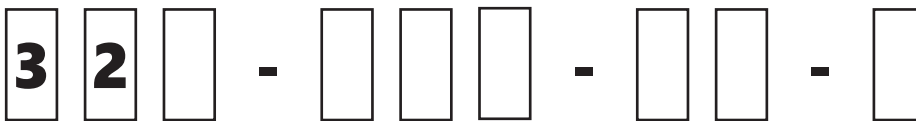

Series Number

32 = Series 32 Circuit Protector

Type


- 1 = Type 1 (I), Auto-Reset, 14VDC
- 2 = Type 2 (II), Modified Reset, 14VDC
- 3 = Type 3 (III), Push to Reset, 28VDC

Terminal Studs

- A = Two #10-32 studs;
Length .66 [16.8] AUX .56 [14.2] BAT
- B = Two #10-32 studs;
Length .56 [14.2] AUX & BAT
- C = Two #10-32 studs;
Length .66 [16.8] AUX & BAT

Bracket

- 0 = No Mounting Bracket
- 1 = Perpendicular, .23 Mtg Holes
- 2 = Parallel, .23 Mtg Holes
- 3 = Perpendicular, .265 Mtg Holes
- 4 = Parallel, .265 Mtg Holes



Bracket 1 & 3



Bracket 2 & 4

Metal

Plastic

Terminal Hardware

- 0 = None
- A = Two #10-32 KEPS Nuts, Assembled
- B = Two #10-32 KEPS Nuts, Bulk


Amp Ratings

- | | |
|---------------------|----------------------|
| 03 = 3 Amp / Violet | 20 = 20 Amp / Yellow |
| 04 = 4 Amp / Pink | 25 = 25 Amp / Gray |
| 05 = 5 Amp / Tan | 30 = 30 Amp / Green |
| 06 = 6 Amp / Green | 35 = 35 Amp / Brown |
| 08 = 8 Amp / Brown | 40 = 40 Amp / Orange |
| 10 = 10 Amp / Red | 50 = 50 Amp / Red |
| 15 = 15 Amp / Blue | |

Standard Color Code between terminals

Cover Material

- M = Metal (Type 1 & 2 Only)
- P = Plastic (Type 1 & 3 Only)
- MS = Sealed Metal (Type 1 & 2 Only)
- PS = Sealed Plastic (Type 1)



p/n 323-A2P-XX-X
Amp rating not specified

