

Crimp Information Sheet

Terminal Part Number: 12124582
 Surface Plating: SN
 Material Thickness [mm]: 0,32
 Cross Section [mm²]: 1,00 | 2,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1005
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,05 - 2,70
 Seal(s): 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 1,00 / 15324982		2,23	120	1,40	0,05	3,00	0,10	4,60	0,10	4,50	0,10
1005 2,00 / 15324982		2,58	200	1,45	0,05	2,95	0,10	4,60	0,10	4,50	0,10

Cable type code legend:

1005:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, PVDF, XLPE
 Insul. Wall Designator: THIN

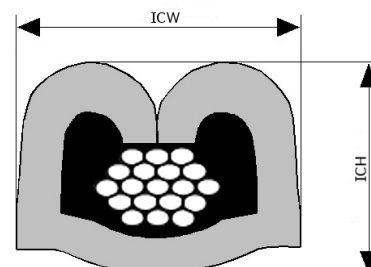

Crimp Information Sheet

Terminal Part Number: 12124582
 Surface Plating: SN
 Material Thickness [mm]: 0,32
 Cross Section [mm²]: 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1005
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
 Insulation Range Φ [mm]: 2,05 - 2,40
 Seal(s): 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 1,00 / 15324982		2,23	120	1,40	0,05	3,00	0,10	4,60	0,10	4,50	0,10

Cable type code legend:

1005:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, PVDF, XLPE
 Insul. Wall Designator: THIN

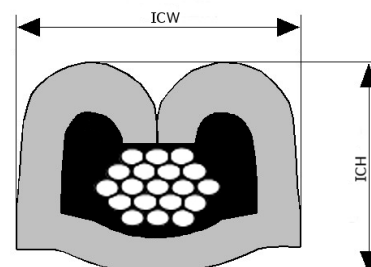

Crimp Information Sheet

Terminal Part Number: 12124582
 Surface Plating: SN
 Material Thickness [mm]: 0,32
 Cross Section [mm²]: 1,00 | 2,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1005
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
 Insulation Range Φ [mm]: 2,05 - 2,70
 Seal(s): 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 1,00 / 15324982		2,23	120	1,40	0,05	3,00	0,10	4,60	0,10	4,50	0,10
1005 2,00 / 15324982		2,58	200	1,45	0,05	2,95	0,10	4,60	0,10	4,50	0,10

Cable type code legend:

1005:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, PVDF, XLPE
 Insul. Wall Designator: THIN

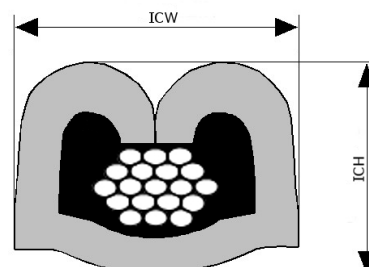

Crimp Information Sheet

Terminal Part Number: 12124582
 Surface Plating: SN
 Material Thickness [mm]: 0,32
 Cross Section [mm²]: 1,00 | 2,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1007
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,45 - 3,10
 Seal(s): 15324982 | 15324980

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 1,00 / 15324982		2,58	120	1,40	0,05	3,00	0,10	4,60	0,10	4,50	0,10
1007 2,00 / 15324980		2,98	200	1,45	0,05	2,95	0,10	4,70	0,10	4,50	0,10

Cable type code legend:

1007:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPA/PVDF, XLPE
 Insul. Wall Designator: REGULAR

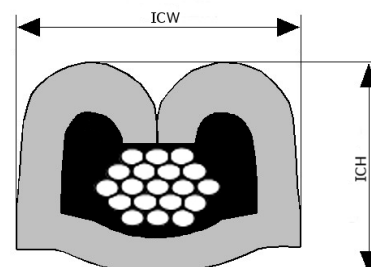

Crimp Information Sheet

Terminal Part Number: 12124582
 Surface Plating: SN
 Material Thickness [mm]: 0,32
 Cross Section [mm²]: 1,00 | 2,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1007
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
 Insulation Range Φ [mm]: 2,45 - 3,10
 Seal(s): 15324982 | 15324980

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 1,00 / 15324982		2,58	120	1,40	0,05	3,00	0,10	4,60	0,10	4,50	0,10
1007 2,00 / 15324980		2,98	200	1,45	0,05	2,95	0,10	4,70	0,10	4,50	0,10

Cable type code legend:

1007:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPA/PVDF, XLPE
 Insul. Wall Designator: REGULAR

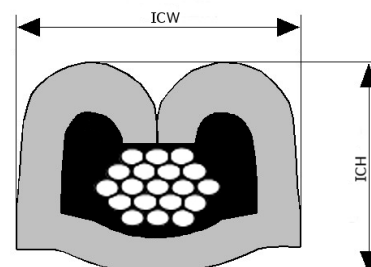

Crimp Information Sheet

Terminal Part Number: 12124582
 Surface Plating: SN
 Material Thickness [mm]: 0,32
 Cross Section [mm²]: 1,00 | 2,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1007
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
 Insulation Range Φ [mm]: 2,45 - 3,10
 Seal(s): 15324982 | 15324980

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 1,00 / 15324982		2,58	120	1,40	0,05	3,00	0,10	4,60	0,10	4,50	0,10
1007 2,00 / 15324980		2,98	200	1,45	0,05	2,95	0,10	4,70	0,10	4,50	0,10

Cable type code legend:

1007:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPA/PVDF, XLPE
 Insul. Wall Designator: REGULAR

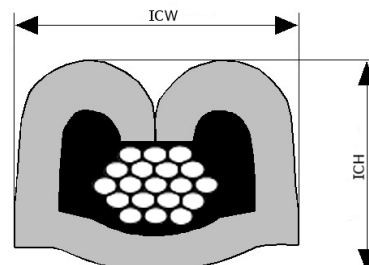

Crimp Information Sheet

Terminal Part Number: 12124582
 Surface Plating: SN
 Material Thickness [mm]: 0,32
 Cross Section [mm²]: 1,00 | 2,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1009
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,90 - 3,95
 Seal(s): 15324981 | 15324980

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 1,00 / 15324980		3,17	120	1,40	0,05	3,00	0,10	4,60	0,10	4,50	0,10
1009 2,00 / 15324981		3,73	200	1,55	0,05	3,05	0,10	5,00	0,10	5,00	0,10

Cable type code legend:

1009:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: SPECIAL

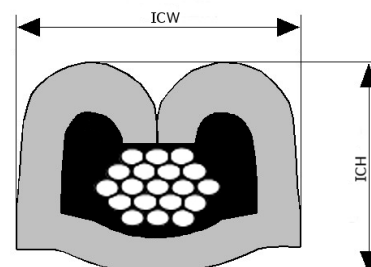

Crimp Information Sheet

Terminal Part Number: 12124582
 Surface Plating: SN
 Material Thickness [mm]: 0,32
 Cross Section [mm²]: 1,00 | 2,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1009
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
 Insulation Range Φ [mm]: 2,90 - 3,95
 Seal(s): 15324980 | 15324981

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 1,00 / 15324980		3,17	120	1,40	0,05	3,00	0,10	4,60	0,10	4,50	0,10
1009 2,00 / 15324981		3,73	200	1,55	0,05	3,05	0,10	5,00	0,10	5,00	0,10

Cable type code legend:

1009:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: SPECIAL

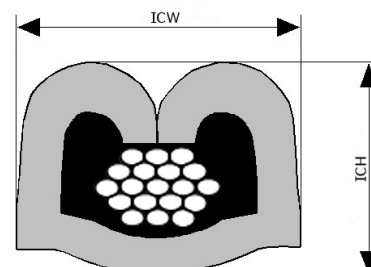

Crimp Information Sheet

Terminal Part Number: 12124582
 Surface Plating: SN
 Material Thickness [mm]: 0,32
 Cross Section [mm²]: 1,00 | 2,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1009
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
 Insulation Range Φ [mm]: 2,90 - 3,95
 Seal(s): 15324981 | 15324980

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 1,00 / 15324980		3,17	120	1,40	0,05	3,00	0,10	4,60	0,10	4,50	0,10
1009 2,00 / 15324981		3,73	200	1,55	0,05	3,05	0,10	5,00	0,10	5,00	0,10

Cable type code legend:

1009:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: SPECIAL

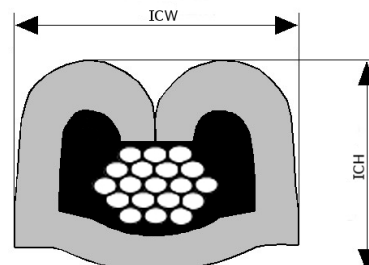

Crimp Information Sheet

Terminal Part Number: 12124582
 Surface Plating: SN
 Material Thickness [mm]: 0,32
 Cross Section [mm²]: 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1011
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 3,35 - 3,55
 Seal(s): 15324980

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1011 1,00 / 15324980		3,45	120	1,40	0,05	3,00	0,10	4,90	0,10	5,00	0,10

Cable type code legend:

1011:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: EAE, POLYOLEFIN, PVC, TPE, XLPE
 Insul. Wall Designator: HEAVY DUTY

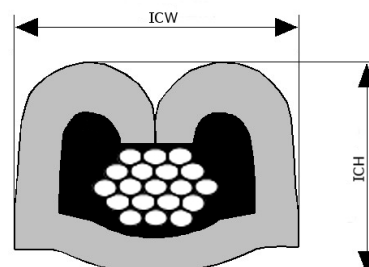

Crimp Information Sheet

Terminal Part Number: 12124582
 Surface Plating: SN
 Material Thickness [mm]: 0,32
 Cross Section [mm²]: 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1011
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
 Insulation Range Φ [mm]: 3,35 - 3,55
 Seal(s): 15324980

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1011 1,00 / 15324980		3,45	120	1,40	0,05	3,00	0,10	4,90	0,10	5,00	0,10

Cable type code legend:

1011:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: EAE, POLYOLEFIN, PVC, TPE, XLPE
 Insul. Wall Designator: HEAVY DUTY

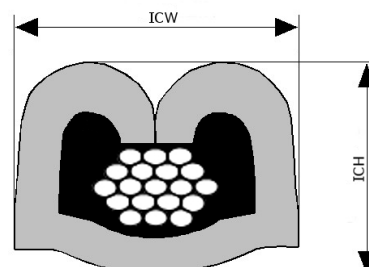

Crimp Information Sheet

Terminal Part Number: 12124582
 Surface Plating: SN
 Material Thickness [mm]: 0,32
 Cross Section [mm²]: 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1025
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,05 - 2,40
 Seal(s): 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1025 1,00 / 15324982		2,23	120	1,40	0,05	3,00	0,10	4,60	0,10	4,50	0,10

Cable type code legend:

1025:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: FLUORPOLYM, HDPE, PBT, PE, PVC, XLPE
 Insul. Wall Designator: THIN

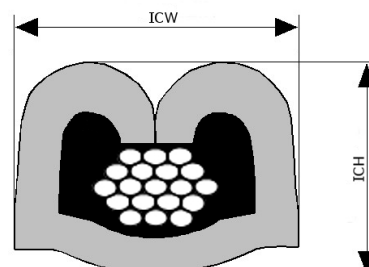

Crimp Information Sheet

Terminal Part Number: 12124582
 Surface Plating: SN
 Material Thickness [mm]: 0,32
 Cross Section [mm²]: 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1025
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
 Insulation Range Φ [mm]: 2,05 - 2,40
 Seal(s): 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1025 1,00 / 15324982		2,23	120	1,40	0,05	3,00	0,10	4,60	0,10	4,50	0,10

Cable type code legend:

1025:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: FLUORPOLYM, HDPE, PBT, PE, PVC, XLPE
 Insul. Wall Designator: THIN

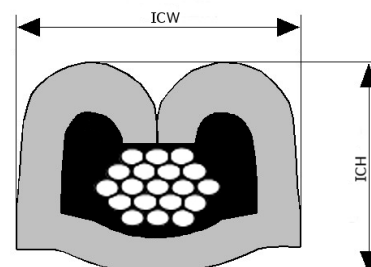

Crimp Information Sheet

Terminal Part Number: 12124582
 Surface Plating: SN
 Material Thickness [mm]: 0,32
 Cross Section [mm²]: 1,00 | 2,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1026
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,45 - 3,10
 Seal(s): 15324982 | 15324980

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1026 1,00 / 15324982		2,55	120	1,40	0,05	3,00	0,10	4,60	0,10	4,50	0,10
1026 2,00 / 15324980		2,98	200	1,45	0,05	2,95	0,10	4,70	0,10	4,50	0,10

Cable type code legend:

1026:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: HDPE, PVC, XLPE
 Insul. Wall Designator: REGULAR

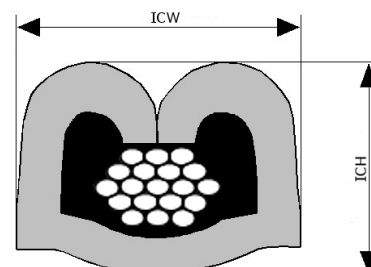

Crimp Information Sheet

Terminal Part Number: 12124582
 Surface Plating: SN
 Material Thickness [mm]: 0,32
 Cross Section [mm²]: 2,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1026
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
 Insulation Range Φ [mm]: 2,85 - 3,10
 Seal(s): 15324980

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1026 2,00 / 15324980		2,98	200	1,45	0,05	2,95	0,10	4,70	0,10	4,50	0,10

Cable type code legend:

1026:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: HDPE, PVC, XLPE
 Insul. Wall Designator: REGULAR

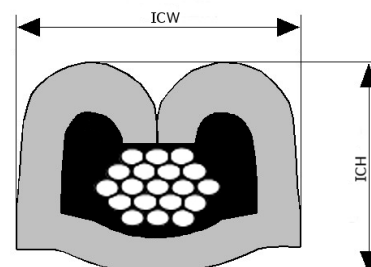

Crimp Information Sheet

Terminal Part Number: 12124582
 Surface Plating: SN
 Material Thickness [mm]: 0,32
 Cross Section [mm²]: 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1094
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,90 - 3,15
 Seal(s): 15324980

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1094 1,00 / 15324980		3,03	120	1,40	0,05	3,00	0,10	4,60	0,10	4,50	0,10

Cable type code legend:

1094:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: HEAVY DUTY

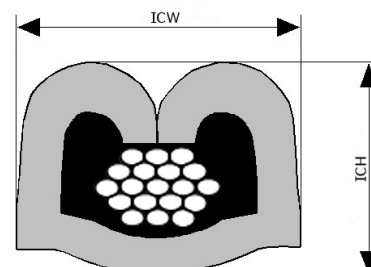

Crimp Information Sheet

Terminal Part Number: 12124582
 Surface Plating: SN
 Material Thickness [mm]: 0,32
 Cross Section [mm²]: 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1094
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
 Insulation Range Φ [mm]: 2,90 - 3,15
 Seal(s): 15324980

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1094 1,00 / 15324980		3,03	120	1,40	0,05	3,00	0,10	4,60	0,10	4,50	0,10

Cable type code legend:

1094:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: HEAVY DUTY

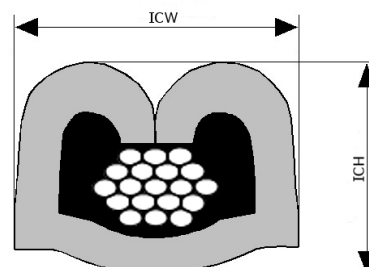

Crimp Information Sheet

Terminal Part Number: 12124582
 Surface Plating: SN
 Material Thickness [mm]: 0,32
 Cross Section [mm²]: 1,50



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2005
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,20 - 2,60
 Seal(s): 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2005 1,50 / 15324982		2,40	160	1,45	0,05	3,00	0,10	4,60	0,10	4,50	0,10

Cable type code legend:

2005: FLR2X (SAAB C)
 Industry Designator: ISO
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: THIN

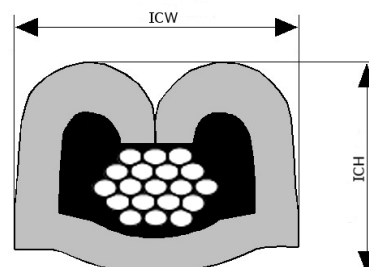

Crimp Information Sheet

Terminal Part Number: 12124582
 Surface Plating: SN
 Material Thickness [mm]: 0,32
 Cross Section [mm²]: 1,00 | 1,50 | 2,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2010
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,80 - 2,61
 Seal(s): 15324982 | 15324985

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 1,00 / 15324985		1,95	160	1,55	0,05	2,40	0,10	4,40	0,10	4,95	0,10
2010 1,50 / 15324982		2,20	200	1,65	0,05	2,40	0,10	4,50	0,10	4,95	0,10
2010 2,00 / 15324982		2,46	230	1,75	0,05	2,40	0,10	4,60	0,10	4,95	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

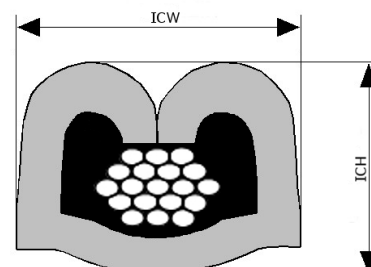

Crimp Information Sheet

Terminal Part Number: 12124582
 Surface Plating: SN
 Material Thickness [mm]: 0,32
 Cross Section [mm²]: 2,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2010
 Crimp Process: (V) SOLDER - VARIAC - CORE IS BARE COPPER OR TINNED
 Insulation Range Φ [mm]: 2,60 - 3,00
 Seal(s): 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 2,50 / 15324982		2,80	250	1,70	0,05	2,60	0,10	4,75	0,10	5,10	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

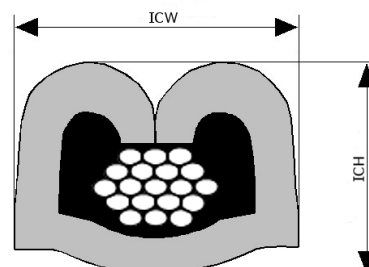

Crimp Information Sheet

Terminal Part Number: 12124582
 Surface Plating: SN
 Material Thickness [mm]: 0,32
 Cross Section [mm²]: 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 7000
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,25 - 1,35
 Seal(s): 15324983

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
7000 1,00 / 15324983		1,30	120	1,45	0,05	2,45	0,10	4,60	0,10	4,50	0,10

Cable type code legend:

7000:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: NONE
 Insul. Wall Designator: NONE

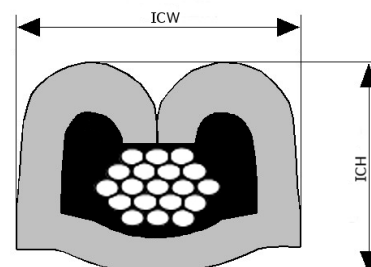

Crimp Information Sheet

Terminal Part Number: 12124582
 Surface Plating: SN
 Material Thickness [mm]: 0,32
 Cross Section [mm²]: 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 9002
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,51 - 2,72
 Seal(s): 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9002 1,00 / 15324982		2,62	120	1,40	0,05	3,00	0,10	4,60	0,10	4,50	0,10

Cable type code legend:

9002:

Industry Designator: MISC
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVDF
 Insul. Wall Designator: MIX

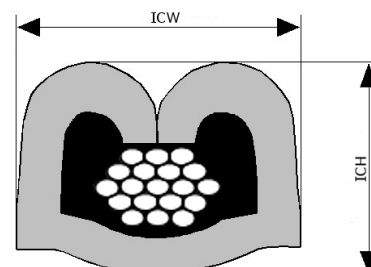

Crimp Information Sheet

Terminal Part Number: 12124582
 Surface Plating: SN
 Material Thickness [mm]: 0,32
 Cross Section [mm²]: 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 9002
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
 Insulation Range Φ [mm]: 2,51 - 2,72
 Seal(s): 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9002 1,00 / 15324982		2,62	120	1,40	0,05	3,00	0,10	4,60	0,10	4,50	0,10

Cable type code legend:

9002:

Industry Designator: MISC
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVDF
 Insul. Wall Designator: MIX

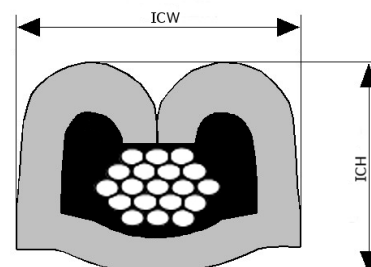

Crimp Information Sheet

Terminal Part Number: 12124582
 Surface Plating: SN
 Material Thickness [mm]: 0,32
 Cross Section [mm²]: 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 9002
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
 Insulation Range Φ [mm]: 2,51 - 2,72
 Seal(s): 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9002 1,00 / 15324982		2,62	120	1,40	0,05	3,00	0,10	4,60	0,10	4,50	0,10

Cable type code legend:

9002:

Industry Designator: MISC
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVDF
 Insul. Wall Designator: MIX

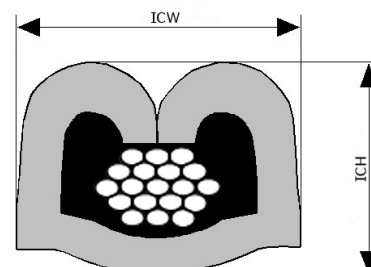

Crimp Information Sheet

Terminal Part Number: 12124582
 Surface Plating: SN
 Material Thickness [mm]: 0,32
 Cross Section [mm²]: 1,00 | 2,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 9003
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,38 - 3,10
 Seal(s): 15324980 | 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9003 1,00 / 15324982		2,46	120	1,40	0,05	3,00	0,10	4,60	0,10	4,50	0,10
9003 2,00 / 15324980		2,95	200	1,45	0,05	2,95	0,10	4,70	0,10	4,50	0,10

Cable type code legend:

9003:

Industry Designator: N/G
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: PVDF
 Insul. Wall Designator: MIX

