# **Series 15700 - RTA**

# Rear Terminal ATC Fuse Panel

The Rear Terminal ATC° Fuse Panel (RTA) is a rear-fed panel with high component retention, which makes it an ideal choice for high vibration environments including construction, agriculture, bus, recreational vehicles, heavy trucking equipment, etc. It is available in multiple lengths and internal bussing configurations. This allows for up to four separate power input circuits and 32 individual output circuits.

### **Specifications**

Input terminal rating: 1/4-20 stud; quick-connect terminals provided on middle bus (Series 15713 & 714); 200A max total input for unit

Output terminal rating: 30A max load per circuit

Temperature rating: -40°F (-40°C) to 260°F (125°C)

Materials: UL 94 V-0 thermoplastic

#### Termination:

• Delphi Pack-Con® Series 3 & 5

• Input wire size: #4-6 AWG

• Output wire size: #10-16 AWG

• Torque Rating: 50 in-lbs max

 Mounting torque rating: #10-32 threaded inserts, 24 in-lbs max torque

#### **Options**

Positions: 8-32 circuits available

Split power: Single, dual, triple or quadruple bus options

Cover: Short cover for fuses only and taller cover for use with circuit breakers


Locks: Secondary locs available for securing of output terminals (#15710-TP - comes in multiples of 8 positions. Must order multiple strips to cover length of selected RTA).




#### Notes

- · Consult Delphi distribution for availability
- For Series 15712, 15713 and 15714, there is a maximum total of 32 positions and must be in increments of 4.

## Ordering information

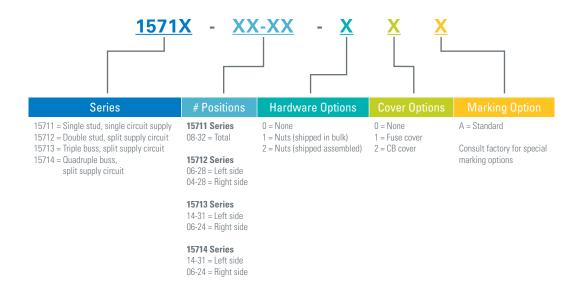

#### Dimensions in mm (inches)

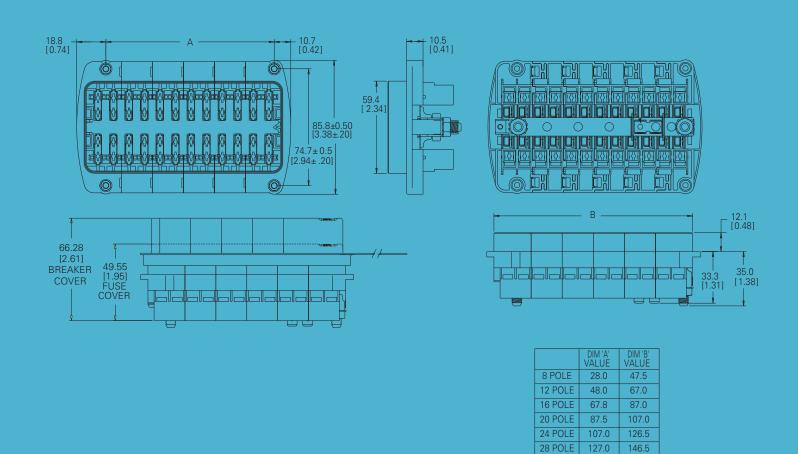

32 POLE

147.0

166.5