

CABLE CLAMPS

Background

History

Catalog


New Products

Details

Model Numbers

Applications

Wayter 25052

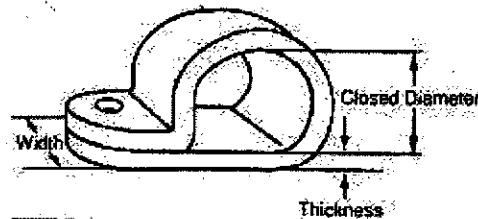

Model No.	Nominal Clamping Dia.		Closed Diameter		Strap Width		Strap Thickness		Mounting Hole		NAS 1397
	In.	(mm)	In.	(mm)	In.	(mm)	In.	(mm)	In.	(mm)	
Nylon, Light-Duty Series, Screw-Mount											
2-LN	.125	(3.2)	.115	(2.9)	.375	(9.5)	.050	(1.3)	.203	(5.2)	P-2E
3-LN	.187	(4.8)	.172	(4.4)	.375	(9.5)	.050	(1.3)	.203	(5.2)	P-3E
*4-LN	.250	(6.4)	.234	(5.9)	.375	(9.5)	.050	(1.3)	.203	(5.2)	P-4E
5-LN	.312	(7.9)	.297	(7.5)	.375	(9.5)	.050	(1.3)	.203	(5.2)	P-5E
6-LN	.375	(9.5)	.359	(9.1)	.375	(9.5)	.050	(1.3)	.203	(5.2)	P-6E
7-LN	.437	(11.1)	.422	(10.7)	.375	(9.5)	.050	(1.3)	.203	(5.2)	P-7E
8-LN	.500	(12.7)	.484	(12.3)	.375	(9.5)	.050	(1.3)	.203	(5.2)	P-8E
Nylon, Light-Duty, Small-Hole Series, Screw-Mount											
2-LNSH	.125	(3.2)	.115	(2.9)	.375	(9.5)	.050	(1.3)	.172	(4.4)	P-2
3-LNSH	.187	(4.8)	.172	(4.4)	.375	(9.5)	.050	(1.3)	.172	(4.4)	P-3
4-LNSH	.250	(6.4)	.234	(5.9)	.375	(9.5)	.050	(1.3)	.172	(4.4)	P-4
5-LNSH	.312	(7.9)	.297	(7.5)	.375	(9.5)	.050	(1.3)	.172	(4.4)	P-5
6-LNSH	.375	(9.5)	.359	(9.1)	.375	(9.5)	.050	(1.3)	.172	(4.4)	P-6
7-LNSH	.437	(11.1)	.422	(10.7)	.375	(9.5)	.050	(1.3)	.172	(4.4)	P-7
8-LNSH	.500	(12.7)	.484	(12.3)	.375	(9.5)	.050	(1.3)	.172	(4.4)	P-8
Nylon, Heavy Duty Series, Screw-Mount											
2-HN	.125	(3.2)	.115	(2.9)	.500	(12.7)	.060	(1.5)	.203	(5.2)	P-2C
3-HN	.187	(4.8)	.172	(4.4)	.500	(12.7)	.060	(1.5)	.203	(5.2)	P-3C
4-HN	.250	(6.4)	.234	(5.9)	.500	(12.7)	.060	(1.5)	.203	(5.2)	P-4C
5-HN	.312	(7.9)	.297	(7.5)	.500	(12.7)	.060	(1.5)	.203	(5.2)	P-5C
6-HN	.375	(9.5)	.359	(9.1)	.500	(12.7)	.060	(1.5)	.203	(5.2)	P-6C
7-HN	.437	(11.1)	.422	(10.7)	.500	(12.7)	.060	(1.5)	.203	(5.2)	P-7C
8-HN	.500	(12.7)	.484	(12.3)	.500	(12.7)	.060	(1.5)	.203	(5.2)	P-8C
9-HN	.562	(14.3)	.547	(13.9)	.500	(12.7)	.060	(1.5)	.203	(5.2)	P-9
10-HN	.625	(15.9)	.609	(15.5)	.500	(12.7)	.060	(1.5)	.203	(5.2)	P-10
11-HN	.687	(17.5)	.672	(17.1)	.500	(12.7)	.060	(1.5)	.203	(5.2)	P-11
12-HN	.750	(19.1)	.734	(18.6)	.500	(12.7)	.060	(1.5)	.203	(5.2)	P-12