
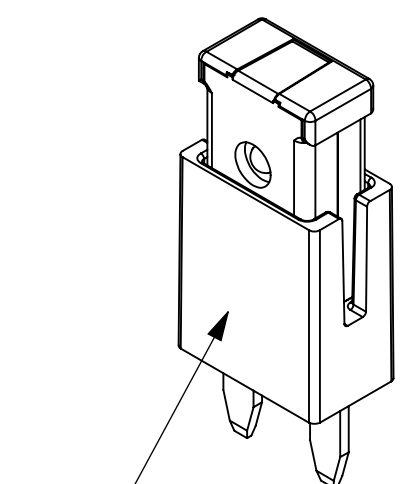
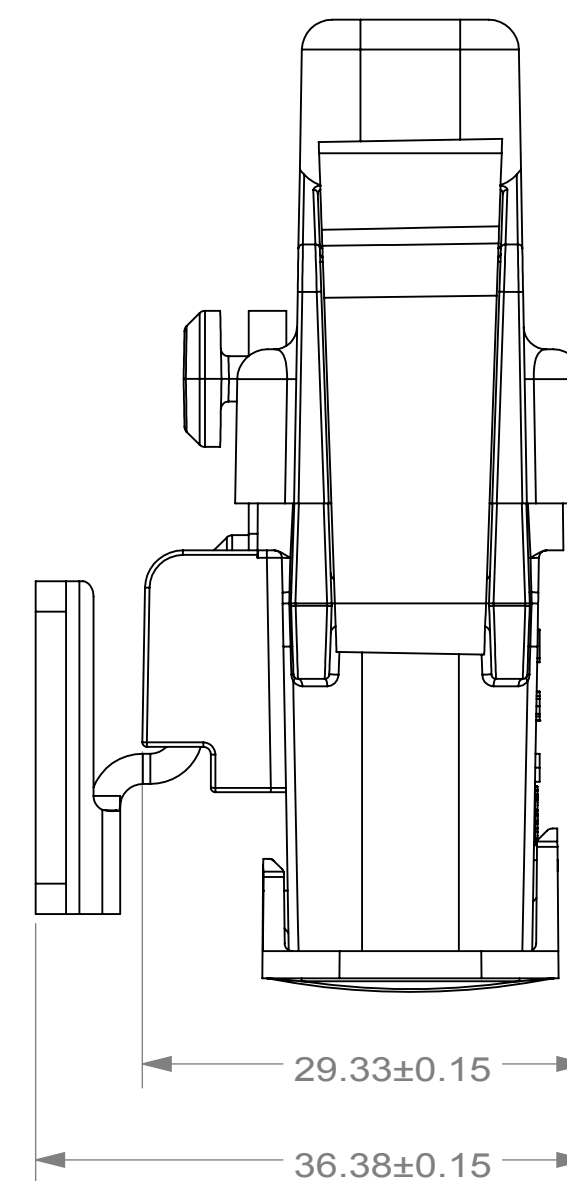
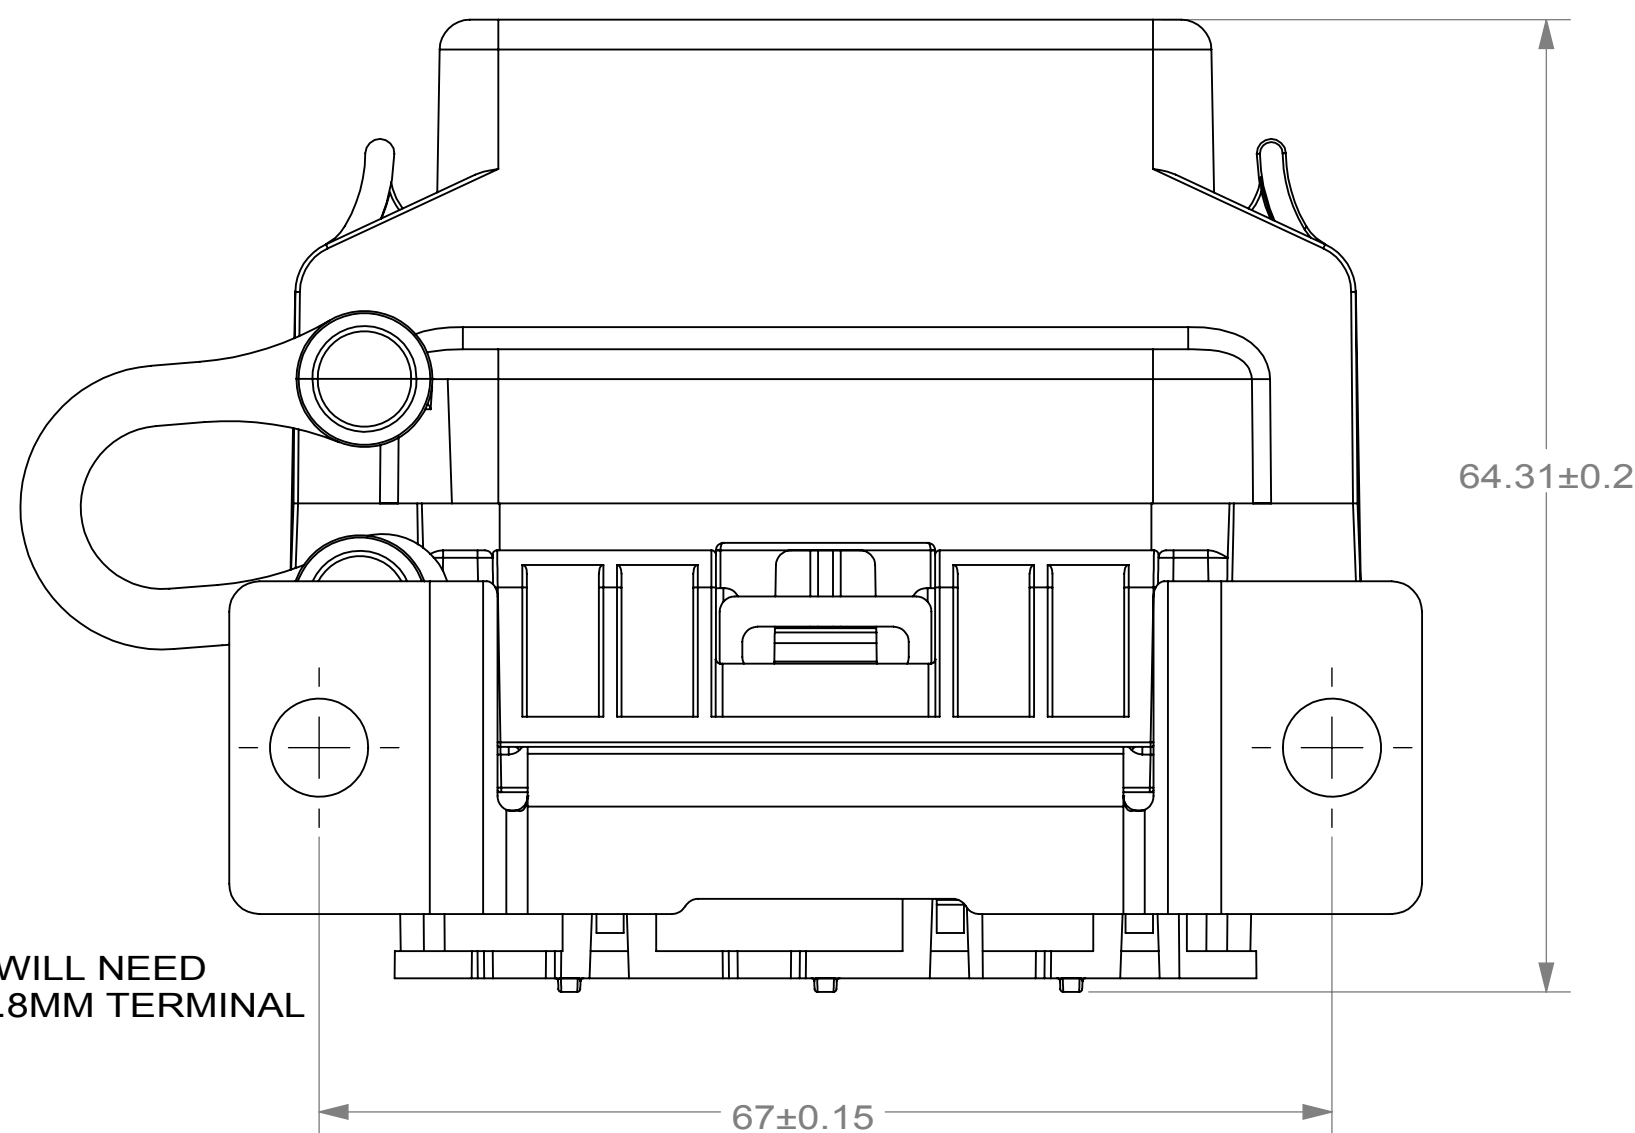


THIS DRAWING AND THE INFORMATION CONTAINED WITHIN IT ARE CONFIDENTIAL AND MAY NOT BE COPIED OR DISCLOSED WITHOUT THE WRITTEN PERMISSION OF LITTELFUSE.

PDM NOTES:

1. MATERIAL: THERMOPLASTIC, UL94 V-0
2. OPERATING TEMPERATURE RANGE: -40 °C TO +85 °C
3. MATE WITH TYCO AMP MCP 2.8 FEMALE TERMINAL, FLR CABLE FOLLOW ISO 6722 CLASS C AND DIN 72511, DETAIL SEE CHART BELOW
4. SIX (6) TERMINAL PORTS ARE CAPABLE OF HOLDING THREE (3) MINI FUSES OR A COMBINATION OF MIMI FUSES, MCASE, AND MINI CIRCUIT BREAKERS
5. 2.8MM BLADES RATED FOR MAXIMUM 40A (AT 20°C AMBIENT TEMPERATURE), TOTAL MAXIMUM CURRENT 120A
6. TPAS AND METAL BRACKET(868-964) TO BE PACKED ALONG WITH THE HOLDER SEPARATELY IN BULK, AND THE BASE WITH COVER, YELLOW LATCH, AND SEAL INSTALLED
7. OPTIONAL TETHER (89000470) TO BE INSTALLED WITH THE PIN ON COVER AND THE PIN ON THE BASE
8. OPTIONAL BRACKET (868-984) CAN BE SOLD SEPARATELY
9. CAPABLE OF 25A CONTINUOUS CURRENT
10. MOUNTING TORQUE: 5.5-6.5NM, USING M6 BOLT & LOCK WASHER
11. INGRESS PROTECTION RATING: IP67

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	PER EC #: INITIAL RELEASE	10/16/2015	D.CHENG

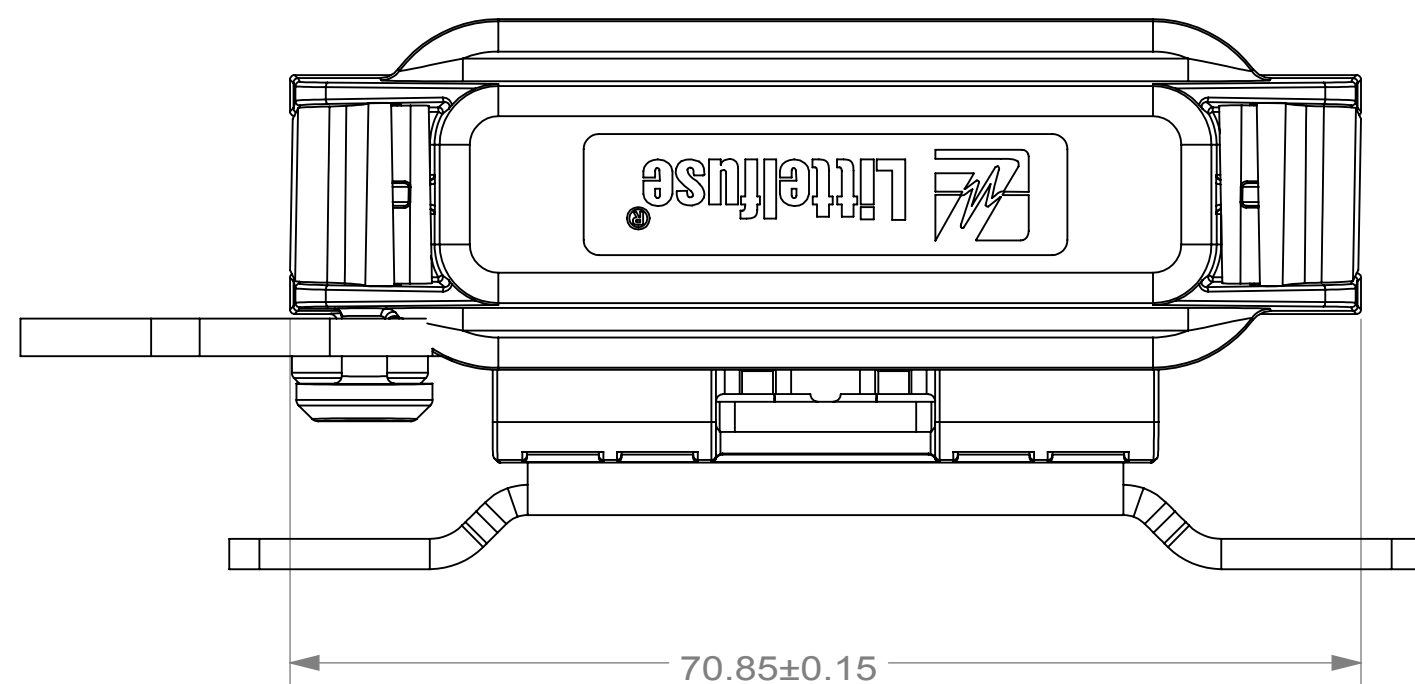

OPTIONAL:
MCASE ADAPTER (875-584) WILL NEED
IF USING MCASE FUSE IN 2.8MM TERMINAL

NOTE: DESIGN AND APPLICATION FOR TE AMP MCP 2.8 FEMALE TERMINAL, DETAILS AS BELOW
WIRE SPEC: DIN 72551 AND ISO 6722, CLASS B

Wire Size range(mm2)	Insulation Diameter(mm) FLR	Material and Finish	Part Number Strip Form	TE Cable Seal Part Number	Cable Seal Color
0.35-0.50	1.2-1.4	1-xxx-1/1-xxx-3	968882	828904-1	Blue
0.5-1.0	1.4-2.1	1-xxx-1/1-xxx-2/1-xxx-3	968855	828904-2	
1.0-2.5	2.2-3.0	1-xxx-1/1-xxx-3	968857	828905-1	White
			Cable Seal Plug	828922-1	Natural

Material and Finish: 1-xxx-1 = CuNiSi, pre-tin plated
: 1-xxx-2 = CuNiSi, selective gold plated
: 1-xxx-3 = CuNiSi, selective silver plated

DIMENSIONS ARE SHOWN IN MILLIMETERS. DIMENSIONS AND TOLERANCES ARE DEFINED ACCORDING TO ANSI/ASME Y14.5-1994.

- DENOTES PRODUCTS CRITICAL CHARACTERISTICS
- CPK DENOTES CPK DIMENSIONS MINIMUM CPK VALUE
- ST DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS
- CP DENOTES CP DIMENSIONS. MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE

TOLERANCES UNLESS OTHERWISE SPECIFIED (REF. ISO2768-M)

DIMENSION	UP TO 0.5 - 3	OVER 3 - 6	OVER 6 - 30	OVER 30 - 120	OVER 120 - 400	ANGLE
TOLERANCES	±0.1	±0.1	±0.2	±0.3	±0.5	±0.5°

NAME	DATE
DRAWN D.CHENG	2/18/2016
CHECKED	

Littelfuse
Excerpt: Applied | Answer's Be. word
No.6 Xinghai Street, Suzhou Industry Park, China
Phone +86 512 6761 3189 Fax +86 512 6761 1489

TITLE: HWB6 ASSY MARKET

THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING

SCALE: 1:1


DWG. NO. OL-PDM32000ZXM

REV. A

SHEET 1 OF 3

THIS DRAWING AND THE INFORMATION CONTAINED WITHIN IT ARE CONFIDENTIAL AND MAY NOT BE COPIED OR DISCLOSED WITHOUT THE WRITTEN PERMISSION OF LITTELFUSE.

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	PER EC #: INITIAL RELEASE	10/16/2015	D.CHENG

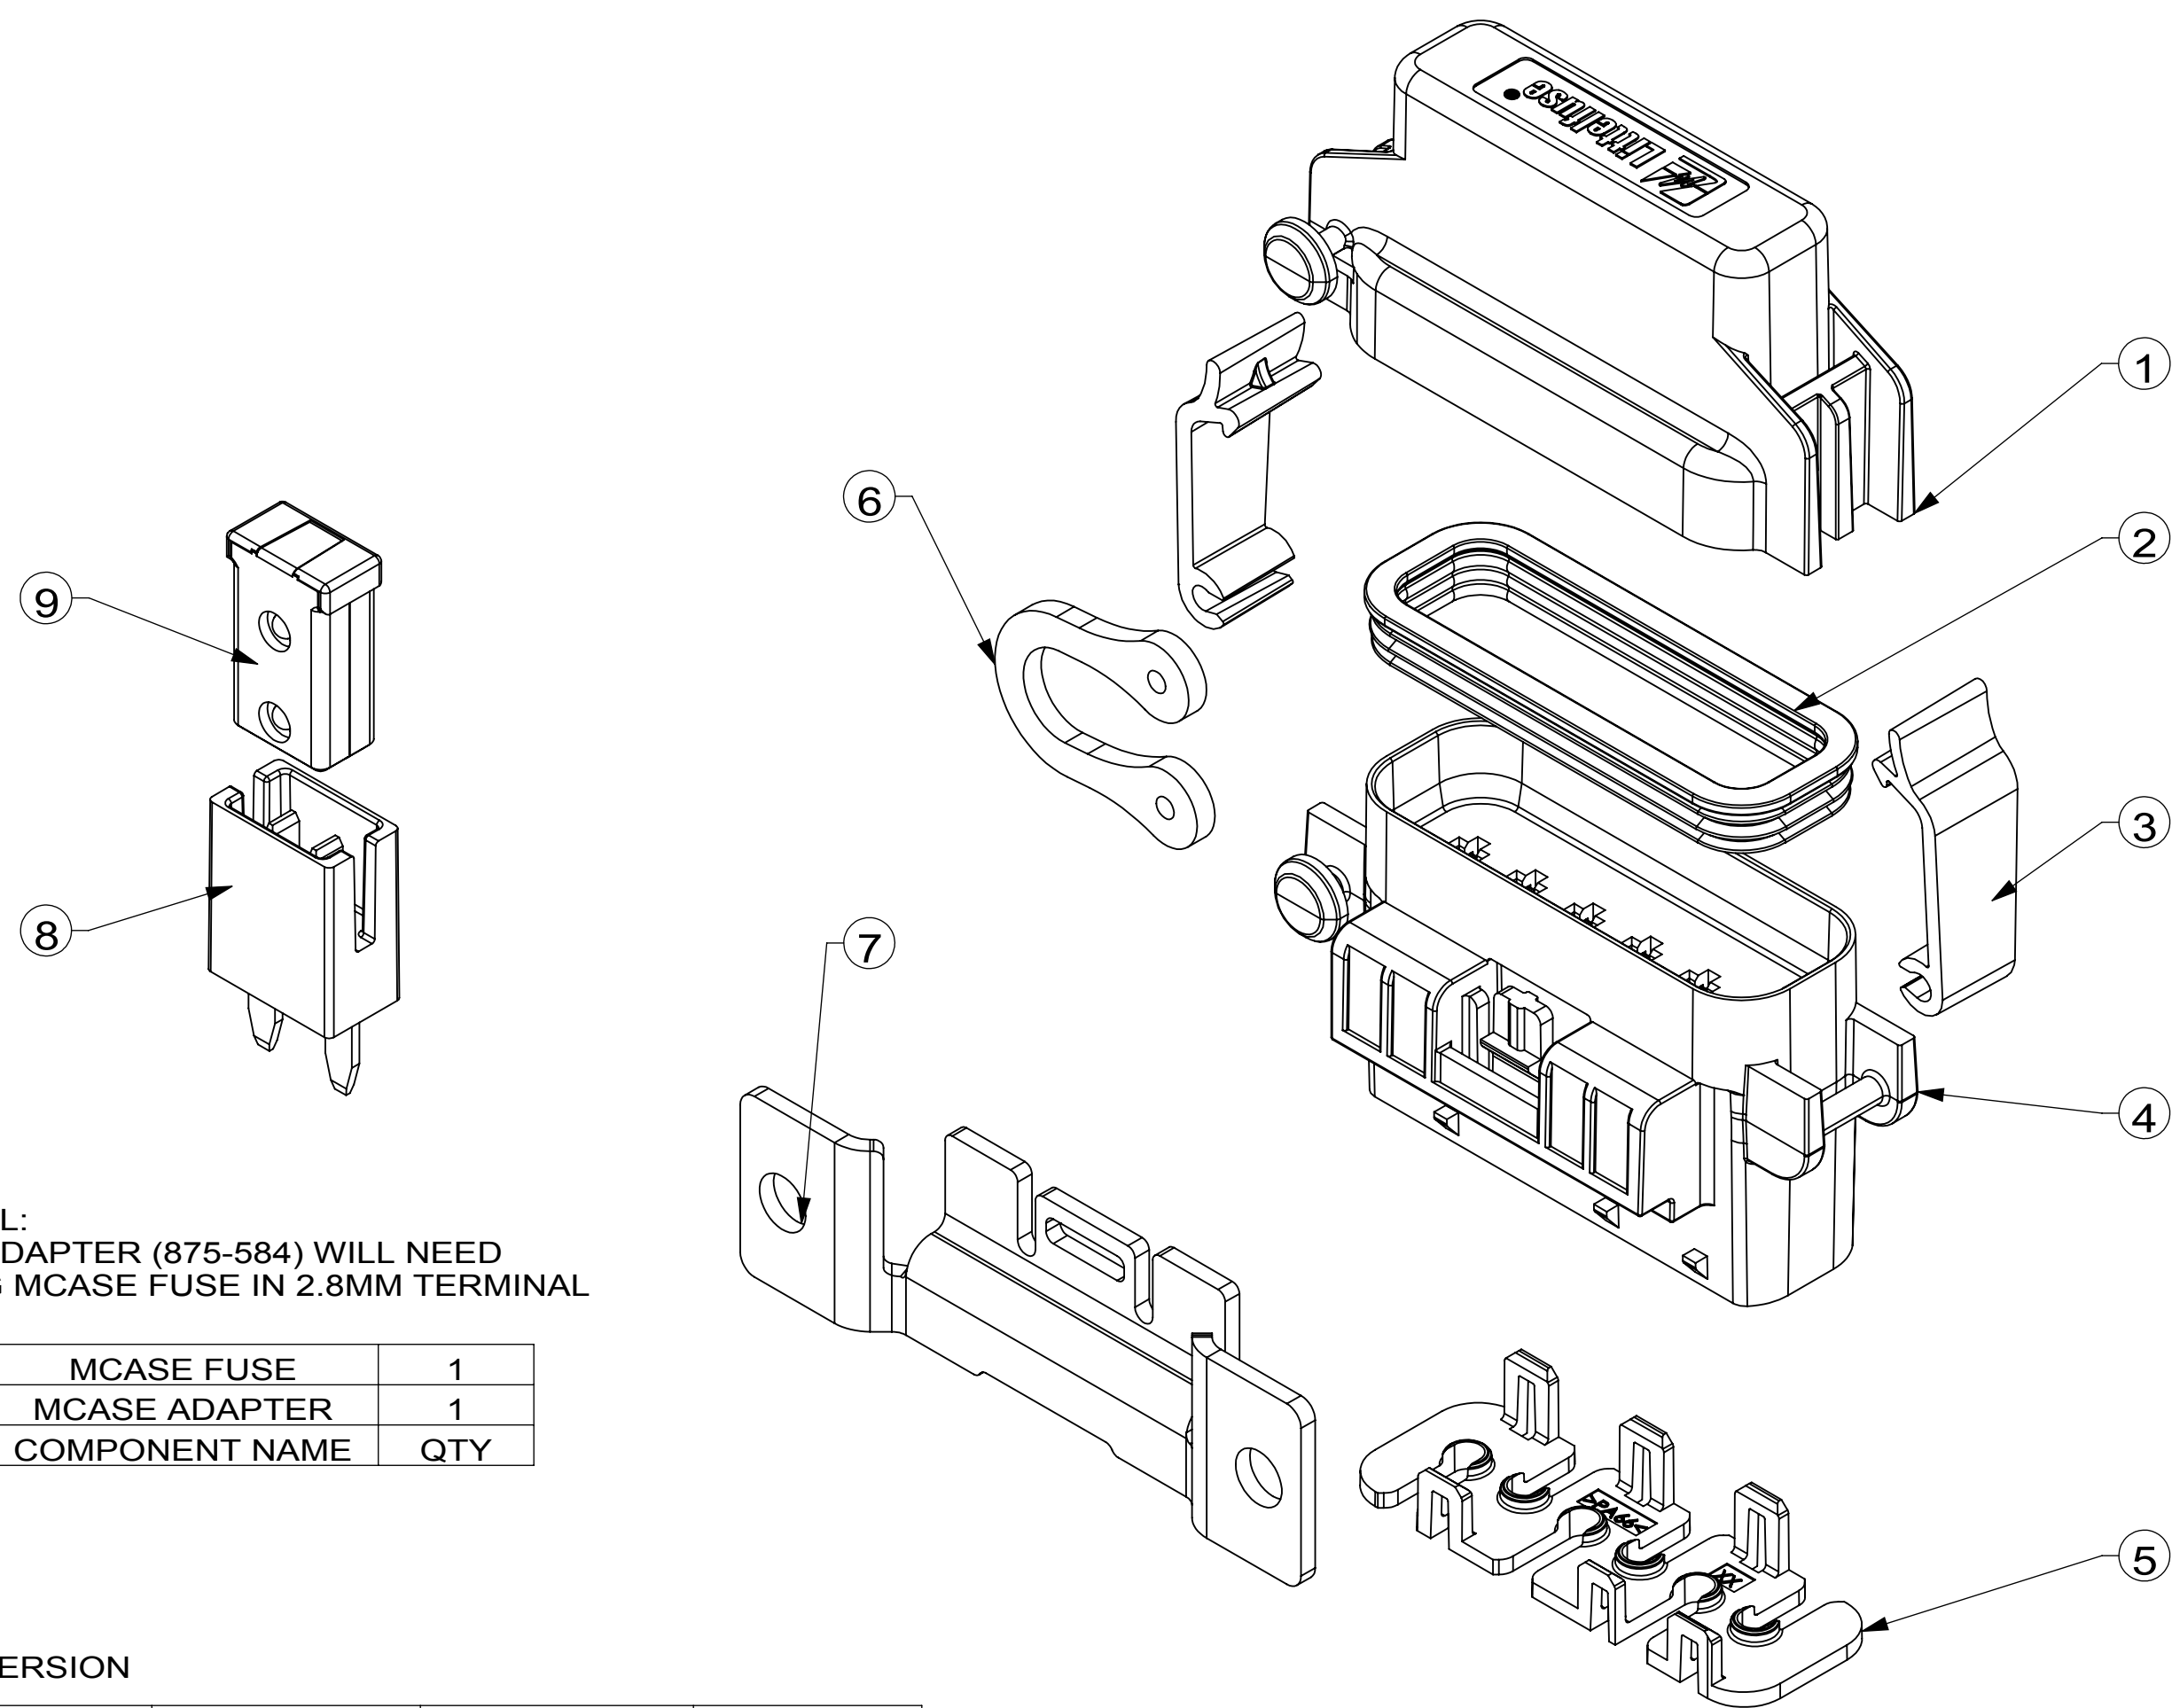

OPTIONAL:
MCASE ADAPTER (875-584) WILL NEED
IF USING MCASE FUSE IN 2.8MM TERMINAL

NO.	COMPONENT NAME	QTY
9	MCASE FUSE	1
8	MCASE ADAPTER	1

MARKET VERSION

HWB6 P/N	CLEAR COVER	BLACK COVER	BRACKET
PDM32001ZXM	X		
PDM32002ZXM		X	
PDM32003ZXM	X		X
PDM32004ZXM		X	X

NO.	COMPONENT NAME	QTY
7	BRACKET NEW	1
6	TETHER HOLDER	1
5	TPA	1
4	BASE	1
3	YELLOW LATCH WITH GRIP	2
2	SILICON RUBBER	1
1	COVER	1

DIMENSIONS ARE SHOWN IN MILLIMETERS. DIMENSIONS AND TOLERANCES ARE DEFINED ACCORDING TO ANSIS/ASME Y14.5-1994.

- DENOTES PRODUCTS CRITICAL CHARACTERISTICS
- CPK** DENOTES CPK DIMENSIONS MINIMUM CPK VALUE
- ST** DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS
- CP** DENOTES CP DIMENSIONS. -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE

TOLERANCES UNLESS OTHERWISE SPECIFIED (REF. ISO2768-M)

DIMENSION	UP TO 0.5	OVER 0.5 - 3	UP TO 3 - 6	OVER 3 - 6	UP TO 6 - 30	OVER 6 - 30	UP TO 30 - 120	OVER 30 - 120	UP TO 120 - 400	OVER 120 - 400	ANGLE
TOLERANCES	±0.1	±0.1	±0.2	±0.2	±0.3	±0.5	±0.5	±0.5	±0.5	±0.5	±0.5°

NAME	DATE
DRAWN: D.CHENG	2/18/2016
CHECKED: -	-
-	-
-	-

Littelfuse
Excerpte Applied | Answer's Be. word
 No.6 Xinghai Street, Suzhou Industry Park, China
 Phone +86 512 6761 3189 Fax +86 512 6761 1489

TITLE HWB6 ASSY MARKET

THIRD ANGLE PROJECTION


DO NOT SCALE DRAWING

SCALE 1:1

DWG. NO. OL-PDM32000ZXM


REV. A

SHEET 2 OF 3

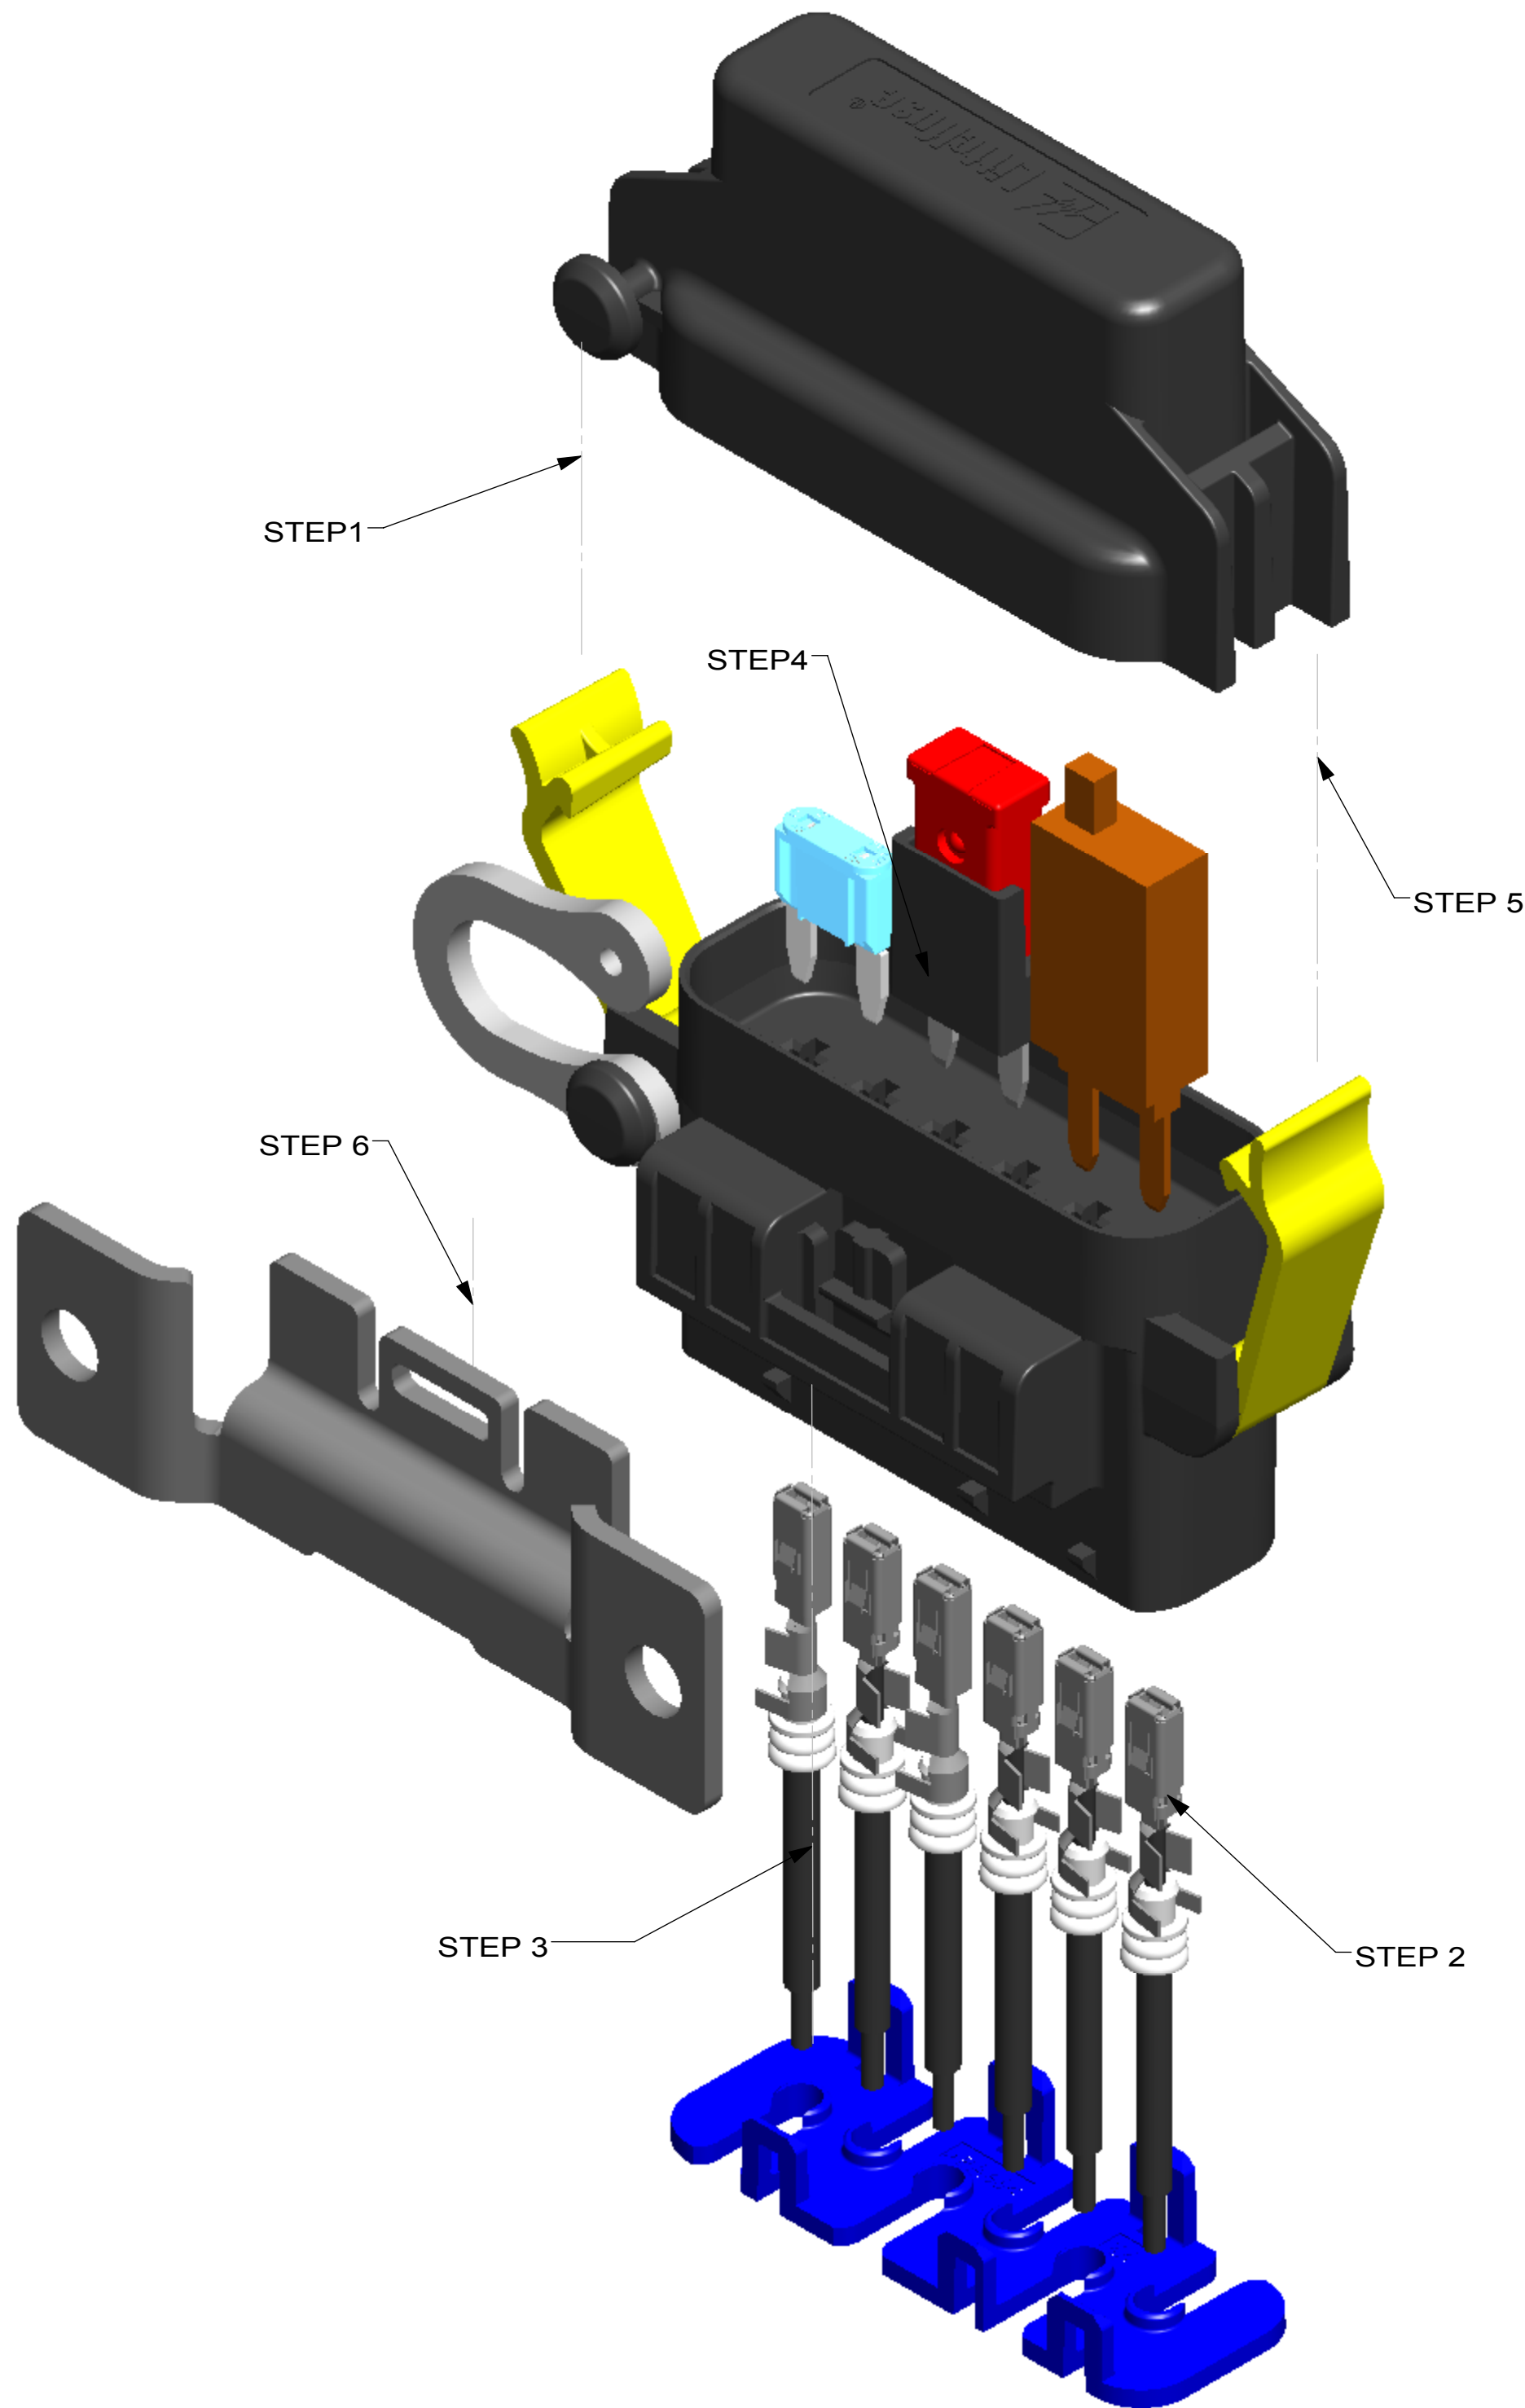

ASSEMBLY STEPS(FOR CUSTOMER ASSEMBLY USE ONLY)

- STEP1: OPEN THE YELLOW LATCHES BY HAND OR A SIMPLE TOOL LIKE SCREW DRIVER, AND REMOVE COVER,
- STEP2: PUT CABLE THROUGH THE CABLE SEAL AND STRIP THE CABLE AND CRIMP THE CABLE AND CABLE SEAL WITH TYCO 2.8MM TERMINAL.
- STEP3: BEND THE CABLE TO 2 LINES AND MAKE THE TPA GO THROUGH SMOOTHLY AND THEN PUSH THE CABLE AND TERMINAL TO BASE CABLE CAVITIES UNTIL HEAR A CLICK SOUND, THEN SNAPPING TPA TO BASE,
- STEP4: INSERT 3 MINI FUSES OR COMBINATION OF MINI FUSE, MCASE FUSE(NEED ADAPTER), AND MINI CIRCUIT BREAKER,
- STEP5: ASSEMBLE THE COVER (SEAL SEATED BY LATCHES) WITH BASE AND SNAPPING THE YELLOW LATCH,
- STEP6: OPTIONAL: ASSEMBLE THE BRACKET TO BASE.

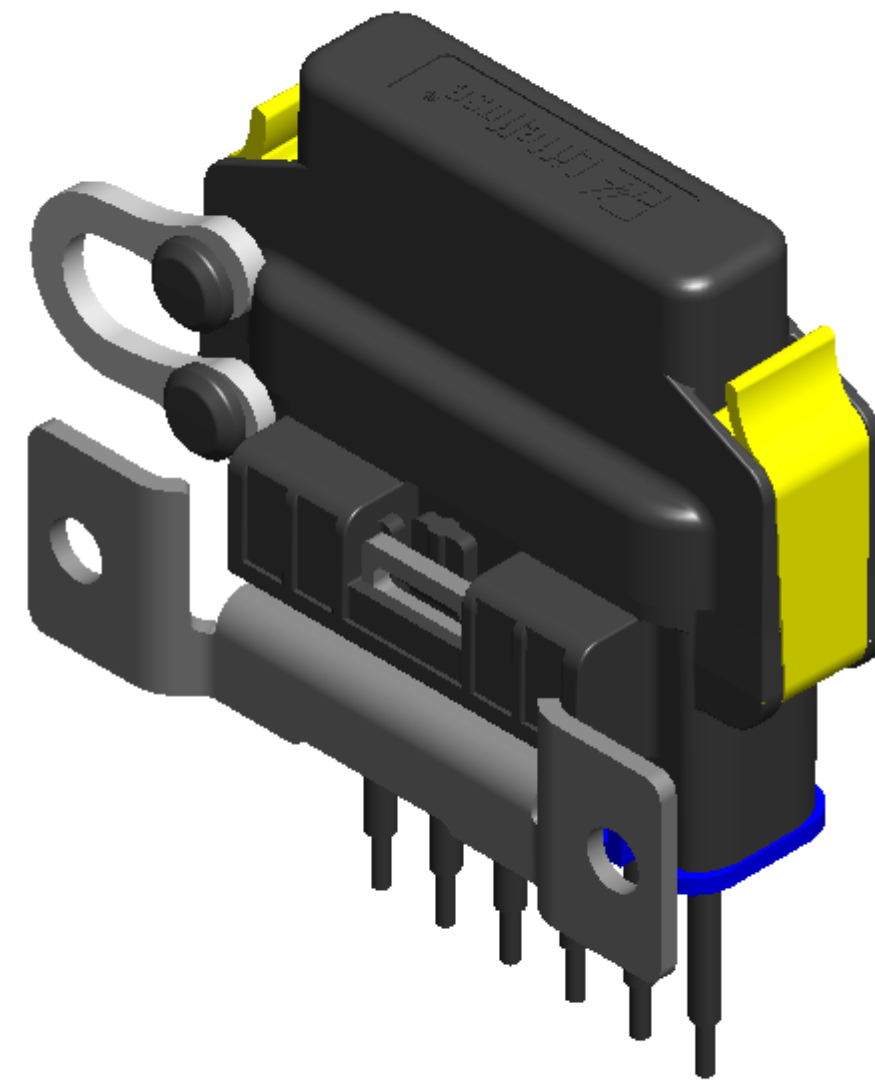

DIMENSIONS ARE SHOWN IN MILLIMETERS. DIMENSIONS AND TOLERANCES ARE DEFINED ACCORDING TO ANSIS/ASME Y14.5-1994.						
●	DENOTES PRODUCTS CRITICAL CHARACTERISTICS					
CPK	DENOTES CPK DIMENSIONS MINIMUM CPK VALUE					
ST	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS					
CP	DENOTES CP DIMENSIONS. -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE					
TOLERANCES UNLESS OTHERWISE SPECIFIED (REF. ISO2768-M)						
DIMENSION	UP TO 0.5 - 3	OVER 0.5 - 3 UP TO 3 - 6	OVER 3 - 6 UP TO 6 - 30	OVER 6 - 30 UP TO 30 - 120	OVER 30 - 120 UP TO 120 - 400	ANGLE
TOLERANCES	±0.1	±0.1	±0.2	±0.3	±0.5	±0.5°
DRAWN	NAME	DATE	 Excessive Application Anshu's Best Friend No.6 Xinghai Street, Suzhou Industry Park, China Phone +86 512 6761 3189 Fax +86 512 6761 1489			
CHECKED						
THIRD ANGLE PROJECTION			TITLE	HWB6 ASSY MARKET		
DO NOT SCALE DRAWING	SCALE 1:1	DWG. NO.	OL-PDM32000ZXM	REV.	A	
			SHEET 3 OF 3			