


This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).

Disclaimer: The technical data that is made part of this document may be subject to the International Traffic in Arms Regulation (ITAR) and the Export Administration Regulations (EAR). Disclosure of technical data to Foreign Persons in the course of employment with U.S. contractors is considered an export and is subject to the ITAR and EAR export licensing requirements/regulations.

DESCRIPTION: 20/2 J1939/15 125C 300V			UNITS: IN	SCALE: 16:1	ITEM	SPECIFICATIONS
NORTHWIRE P/N: FJ1939202-008					Α.	20 GAUGE 19x.008"
CUSTOMER: ALL	APPR BY: NN	REVD BY: DL	DWG NO: J1939	-15 20AWG	] [	
CUSTOMER P/N: TBD	DRAWN BY: DP LA	NGER	DATE: 7/14/2015	REV: B	] B.	16 MIL XLPE INSULA

CORE DIMENSIONS FOR INTERNAL USE ONLY

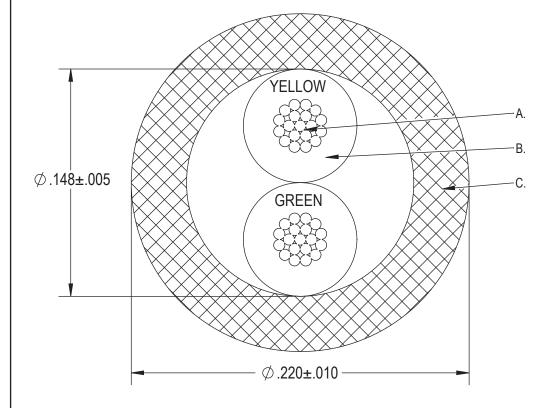


20 GAUGE 19x.008"BC

16 MIL XLPE INSULATION 125C 300V 13 MIL MIN. XLPE INSULATION O.D. .074 ± .002

30 MIL TUBED TPE JACKET 125C 300V 24 MIL MIN. TPE JACKET COLOR:BLACK

NO AGENCY APPROVALS

ROHS3 DIRECTIVE (EU) 2015/863 TO AMEND ANNEX II TO EU ROHS 2, 2011/65/EU WITH NO **EXEMPTIONS** 

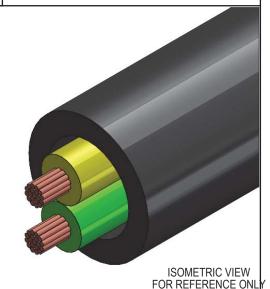

LEGEND SPECIFICATIONS: NO LEGEND ON CABLE

OSCEOLA:

SANTA TERESA:

SHEET 1 OF 2



This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).

Disclaimer: The technical data that is made part of this document may be subject to the International Traffic in Arms Regulation (ITAR) and the Export Administration Regulations (EAR). Disclosure of technical data to Foreign Persons in the course of employment with U.S. contractors is considered an export and is subject to the ITAR and EAR export licensing requirements/regulations.

DESCRIPTION: 20/2 J1939/15 125C 300V		UNITS: IN	SCALE: 60:1	ELECTRICAL REQUIREMENTS
NORTHWIRE P/N: FJ1939202-008				IMPEDANCE: 120 Ohms NOMINAL
CUSTOMER: ALL	APPR BY: NN	DWG NO: J1939-15 20AWG		CAPACITANCE: 12.6 pF/FT NOMINAL
CUSTOMER P/N: TBD	DRAWN BY: DP LANGER	DATE: 7/14/201	5 REV: B	

## MECHANICAL REQUIREMENTS

CABLE WILL SHOW IRREGULARITIES (CONVOLUTIONS) OF CORE ASSEMBLY THROUGH OUTER JACKET

UPDATED FORMAT	В	19409	6/9/2022	AV				
INITIAL RELEASE	А	-	7/14/15	DPL				
REVISION RECORD	REV.	ECR NO.	REV DATE	APR				
REVISIONS								