



HYPERBUSS™ Family



More Power. More Data. More Control.

Amphenol Sine Systems' **HYPERBUSS™ Family of Bussed Receptacles** are an environmentally-sealed, multi-pin, heavy duty, plastic, circular or rectangular connector for use in applications where a common "bussed" electrical pathway is required, such as Bussed Feedback Receptacles used as a Splice Block or Tap Block. With an IP68 and/or IP69K rating (in mated condition), depending on Series/Layout, the HYPERBUSS™ Family of Bussed Receptacles contain either an integrated latch or an a quick-connect, circular, bayonet locking system to ensure proper mating to its respective Series plugs.

Buss: a conductor, or a group of conductors, used for collecting electric power from the incoming feeders and distributes them to the outgoing feeders; a type of electrical junction in which all the incoming and outgoing electrical current meets.

Available in the following receptacle options: HYPERBUSS™ AT, HYPERBUSS™ ATP, HYPERBUSS™ ATV, HYPERBUSS™ PSM and DuraMate™ AHDP with HYPERBUSS™, each intermateable with their respective plug (AT Series™, ATP Series™, ATV Series™, ATHD Series™ and DuraMate™ AHDP Series plugs) and industry standard connectors.



HYPERBUSS™ AT



HYPERBUSS™ ATP



HYPERBUSS™ ATV



HYPERBUSS™ PSM
POWER & SIGNAL MANAGEMENT




DuraMate™ AHDP
HYPERBUSS™

Key Features

- Sealed Integrated Bussed Feedback Assembly
- Rectangular or circular thermoplastic housings
- Integrated latch or quick-connect, circular, bayonet locking systems
- Bussed receptacles are intermateable with respective Series plugs (AT, ATM, ATV, ATHD and DuraMate AHDP)
- IP68 and/or IP69K rated (in mated condition), depending on Series/Layout




Applications: Heavy Duty, Transportation, Marine, Diagnostic, Military, Alternative Energy and Agricultural



Example

Maximum rated current is determined by the combined current across the entire buss. In the 13A example below, various combinations of current can be achieved, but must be limited to a maximum of 18A. See individual datasheets for exact specifications for each part number.

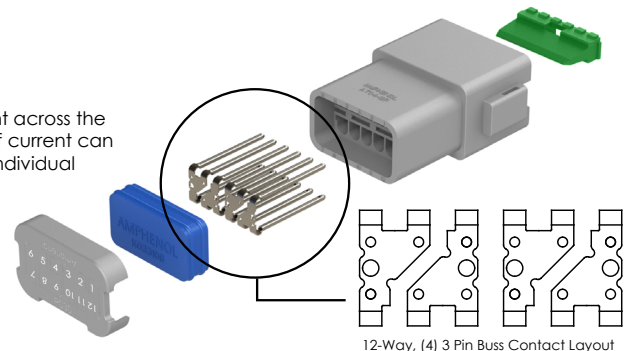

IP Ratings

IP68 rated (Dust tight; 1M of Water for 24 Hours, in mated condition)

IP69K rated (Dust tight; High-Pressure Waterproof, 4 Points (0°, 30°, 60°, 90°), in mated condition)



A Series™ Family



Standard products. Custom solutions
Customer Service +1 800 394 7732



HB HYPERBUSS™ AT

HYPERBUSS™ AT Bussed Receptacles

Available in 2, 4, 6, 8 and 12 position

Amphenol Sine Systems' **HYPERBUSS™ AT Bussed Receptacles** are an environmentally-sealed, multi-pin, heavy duty, plastic, rectangular connector for use in applications where a common "bussed" electrical pathway is required, such as Bussed Feedback Receptacles used as a Splice Block or Tap Block. IP68 and IP69K rated (in mated condition), the HYPERBUSS™ AT Bussed Receptacles contain an integrated latch to ensure proper mating with standard AT Series™ plugs, as well as industry standard connectors.

Buss: a conductor, or a group of conductors, used for collecting electric power from the incoming feeders and distributes them to the outgoing feeders; a type of electrical junction in which all the incoming and outgoing electrical current meets.

Key Features

- Size 16 contacts
- Sealed Intergrated Bussed Feedback Assembly
- IP68 and IP69K Rated (in mated condition)
- Included wedgelock confirms contact alignment/retention
- Integrated latch for mating
- Intermateable with standard AT Series™ Plugs and other industry connectors



Applications: Heavy Duty, Transportation, Marine, Diagnostic, Military, Alternative Energy and Agricultural applications

HYPERBUSS™ AT - Specifications (Reference Individual Datasheets)

IP Rating (in mated condition)	IP68 and IP69K
Contact Size	16
Max. Current (Amperage)	13A Each
Max Voltage Rating	250V
Operating Temperature	-55°C to +125°C
Coupling System	Integrated Latch
Housing Body	Thermoplastic
Contact Types	Machined

Contact Material	Copper Alloy, Nickel Plated
Bracket	Copper Alloy, Nickel Plated
Sleeves	Aluminum, Black Anodized
Min. Mating Cycles	>100
RoHS Compliant	ALL materials meet the requirements of the European Directive. (See website for documentation)
Approvals	UL ECBT2, UL ECBT8

IP Ratings

IP68 rated (Dust tight; 1M of Water for 24 Hours, in mated condition)
IP69K rated (Dust tight; High-Pressure Waterproof, 4 Points (0°, 30°, 60°, 90°), in mated condition)



A **ASeries™ Family**




Standard products. Custom solutions
Customer Service +1 800 394 7732


HYPERBUSTM AT - Bussed Receptacle Dimensions (mm)

Note: Refer to individual datasheets on www.amphenol-sine.com for full specs, faceviews, keying location and product dimensions.


AT04-2P-xxxx

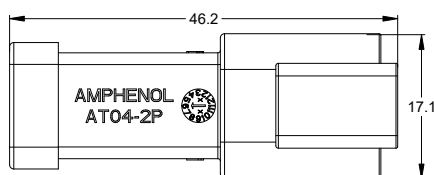


AT04-4P-xxxx

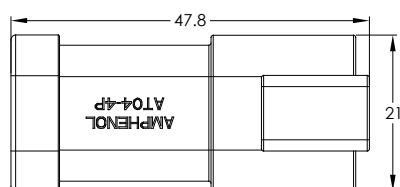


AT04-6P-xxxx

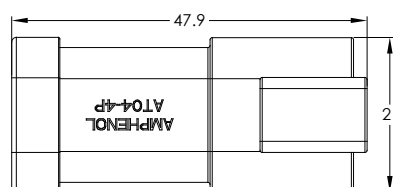

AT04-08Px-xxx



AT04-12Px-xxx

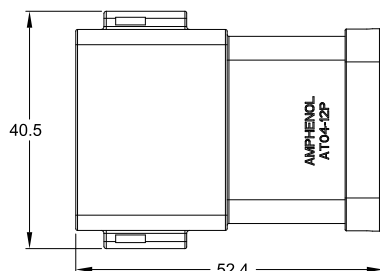

HYPERBUSTM AT - Bussed Receptacles

Note: Refer to individual datasheets on www.amphenol-sine.com for full specs, faceviews, keying location and product dimensions.

Image	Part Number	Description	Contact Size	Amperage
	AT04-2P-P060	2 Pos, Receptacle, Size 16 Contacts, (1) 2 Pin, Nickel, HYPERBUS TM AT, Black Body	16	13A (13A Total)
	AT04-4P-EP13	4 Pos, Receptacle, Size 16 Contacts, (1) 4 Pin, Nickel, HYPERBUS TM AT, Black Body	16	13A (26A Total)
	AT04-4P-P021	4 Pos, Receptacle, Size 16 Contacts, (1) 4 Pin, Nickel, HYPERBUS TM AT, Grey Body	16	13A (26A Total)

	AT04-6P-EP13	6 Pos, Receptacle, Size 16 Contacts, (1) 6 Pin, Nickel, HYPERBUS TM AT, Black Body	16	13A (39A Total)
	AT04-6P-EP14	6 Pos, Receptacle, Size 16 Contacts, (2) 3 Pin, Nickel, HYPERBUS TM AT, Black Body	16	13A (13A Total)
	AT04-6P-P021	6 Pos, Receptacle, Size 16 Contacts, (1) 6 Pin, Nickel, HYPERBUS TM AT, Grey Body	16	13A (39A Total)

Image	Part Number	Description	Contact Size	Amperage
	AT04-08PA-P021	8 Pos, Receptacle, Size 16 Contacts, (1) 8 Pin, Nickel, HYPERBUSSTM AT, Keyed A, Grey Body	16	13A (52A Total)
	AT04-08PB-P021	8 Pos, Receptacle, Size 16 Contacts, (1) 8 Pin, Nickel, HYPERBUSSTM AT, Keyed B, Black Body	16	13A (52A Total)
	AT04-08PA-P026	8 Pos, Receptacle, Size 16 Contacts, (2) 4 Pin, Nickel, HYPERBUSSTM AT, Keyed A, Grey Body	16	13A (26A Total)
	AT04-08PB-P026	8 Pos, Receptacle, Size 16 Contacts, (2) 4 Pin, Nickel, HYPERBUSSTM AT, Keyed B, Black Body	16	13A (26A Total)
	AT04-08PA-P028	8 Pos, Receptacle, Size 16 Contacts, (1) 3 Pin, (1) 5 Pin, Nickel, HYPERBUSSTM AT, Keyed A, Grey Body	16	13A (39A Total)
	AT04-08PB-P028	8 Pos, Receptacle, Size 16 Contacts, (1) 3 Pin, (1) 5 Pin, Nickel, HYPERBUSSTM AT, Keyed B, Black Body	16	13A (39A Total)
	AT04-12PA-P016	12 Pos, Receptacle, Size 16 Contacts, (1) 12 Pin, Gold, HYPERBUSSTM AT, Keyed A, Grey Body	16	13A (78A Total)
	AT04-12PB-P016	12 Pos, Receptacle, Size 16 Contacts, (1) 12 Pin, Gold, HYPERBUSSTM AT, Keyed B, Black Body	16	13A (78A Total)
	AT04-12PA-P021	12 Pos, Receptacle, Size 16 Contacts, (1) 12 Pin, Nickel, HYPERBUSSTM AT, Keyed A, Grey Body	16	13A (78A Total)
	AT04-12PB-P021	12 Pos, Receptacle, Size 16 Contacts, (1) 12 Pin, Nickel, HYPERBUSSTM AT, Keyed B, Black Body	16	13A (78A Total)
	AT04-12PA-P026	12 Pos, Receptacle, Size 16 Contacts, (2) 6 Pin, Nickel, HYPERBUSSTM AT, Keyed A, Grey Body	16	13A (39A Total)
	AT04-12PB-P026	12 Pos, Receptacle, Size 16 Contacts, (2) 6 Pin, Nickel, HYPERBUSSTM AT, Keyed B, Black Body	16	13A (39A Total)
	AT04-12PB-P027	12 Pos, Receptacle, Size 16 Contacts, (2) 6 Pin, Gold, HYPERBUSSTM AT, Keyed B, Black Body	16	13A (39A Total)
	AT04-12PA-P030	12 Pos, Receptacle, Size 16 Contacts, (4) 3 Pin, Nickel, HYPERBUSSTM AT, Keyed A, Grey Body	16	13A (13A Total)
	AT04-12PB-P030	12 Pos, Receptacle, Size 16 Contacts, (4) 3 Pin, Nickel, HYPERBUSSTM AT, Keyed B, Black Body	16	13A (13A Total)
	AT04-12PA-P031	12 Pos, Receptacle, Size 16 Contacts, (4) 3 Pin, Gold, HYPERBUSSTM AT, Keyed A, Grey Body	16	13A (13A Total)
	AT04-12PB-P031	12 Pos, Receptacle, Size 16 Contacts, (4) 3 Pin, Gold, HYPERBUSSTM AT, Keyed B, Black Body	16	13A (13A Total)

Image	Part Number	Description	Contact Size	Amperage
	AT04-12PA-P075	12 Pos, Receptacle, Size 16 Contacts, (3) 4 Pin, Nickel, HYPERBUSSTM AT, Keyed A, Grey Body	16	13A (26A Total)



HB HYPERBUSS™ ATP

HYPERBUSS™ ATP Bussed Receptacles

Available in 2, 4 and 6 position

Amphenol Sine Systems' **HYPERBUSS™ ATP Bussed Receptacles** are an environmentally-sealed, multi-pin, heavy duty, plastic, rectangular connector for use in applications where a common "bussed" electrical pathway is required, such as Bussed Feedback Receptacles used as a Splice Block or Tap Block. With an IP68 and IP69K rating (in mated condition), the HYPERBUSS™ ATP Bussed Receptacles contain an integrated latch to ensure proper mating with standard ATP Series™ plugs, as well as industry standard connectors.

Buss: a conductor, or a group of conductors, used for collecting electric power from the incoming feeders and distributes them to the outgoing feeders; a type of electrical junction in which all the incoming and outgoing electrical current meets.

Key Features

- Size 12 contacts
- Available Keyed A, B, C, D or Blank
- Sealed Integrated Bussed Feedback Assembly
- IP68 and IP69K Rated (in mated condition)
- Included wedgelock confirms contact alignment/retention
- Integrated latch for mating
- Intermateable with ATP Series™ Plugs and other industry connectors



Applications: Heavy Duty, Transportation, Marine, Diagnostic, Military, Alternative Energy and Agricultural applications

HYPERBUSS™ ATP - Specifications (Reference Individual Datasheets)


IP Rating (in mated condition)	IP68 and IP69K
Contact Size	12
Max. Current (Amperage)	25A Each
Max Voltage Rating	250V
Operating Temperature	-55°C to +125°C
Coupling System	Integrated Latch
Housing Body	Thermoplastic
Contact Types	Machined

Contact Material	Copper Alloy, Nickel Plated
Bracket	Copper Alloy, Nickel Plated
Sleeves	Aluminum, Black Anodized
Min. Mating Cycles	>100
RoHS Compliant	ALL materials meet the requirements of the European Directive. (See website for documentation)
Pending Approvals	UL ECBT2, UL ECBT8


HYPERBUSS™ ATP - Bussed Receptacle Dimensions (mm)

Note: Refer to individual datasheets on www.amphenol-sine.com for full specs, faceviews, keying location and product dimensions.


ATP04-2Px-xxxx




ATP04-4Px-xxxx



ATP04-6Px-xxxx



ATP04-6Px-BUS

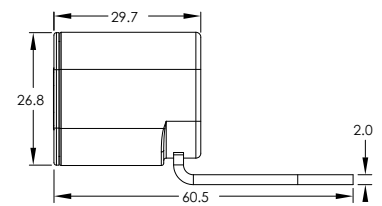

IP Ratings

IP68 rated (Dust tight; 1M of Water for 24 Hours, in mated condition)

IP69K rated (Dust tight; High-Pressure Waterproof, 4 Points (0°, 30°, 60°, 90°), in mated condition)



Standard products. Custom solutions
Customer Service +1 800 394 7732

HYPERBUS™ ATP - Bussed Receptacles

Note: Refer to individual datasheets on www.amphenol-sine.com for full specs, faceviews, keying location and product dimensions.

Image	Part Number	Description	Contact Size	Amperage
	ATP04-2P-P060	2 Position, Receptacle, 2 Pin x 1 Layout, Pin, Contact Size 12, Nickel-Plated, 25A, 250V, HYPERBUS™ ATP, Integrated Latch, Blank Keyed, Solid Rear Seal, End Cap, Black Body	12	25A
	ATP04-2PA-P060	2 Position, Receptacle, 2 Pin x 1 Layout, Pin, Contact Size 12, Nickel-Plated, 25A, 250V, HYPERBUS™ ATP, Integrated Latch, Keyed A, Solid Rear Seal, End Cap, Black Body	12	25A
	ATP04-2PB-P060	2 Position, Receptacle, 2 Pin x 1 Layout, Pin, Contact Size 12, Nickel-Plated, 25A, 250V, HYPERBUS™ ATP, Integrated Latch, Keyed B, Solid Rear Seal, End Cap, Black Body	12	25A
	ATP04-2PC-P060	2 Position, Receptacle, 2 Pin x 1 Layout, Pin, Contact Size 12, Nickel-Plated, 25A, 250V, HYPERBUS™ ATP, Integrated Latch, Keyed C, Solid Rear Seal, End Cap, Black Body	12	25A
	ATP04-2PD-P060	2 Position, Receptacle, 2 Pin x 1 Layout, Pin, Contact Size 12, Nickel-Plated, 25A, 250V, HYPERBUS™ ATP, Integrated Latch, Keyed D, Solid Rear Seal, End Cap, Black Body	12	25A
	ATP04-4P-P021	4 Position, Receptacle, 4 Pin x 1 Layout, Pin, Contact Size 12, Nickel-Plated, 25A (50A Total), 250V, HYPERBUS™ ATP, Integrated Latch, Blank Keyed, Solid Rear Seal, End Cap, Grey Body	12	25A (50A Total)
	ATP04-4PA-P021	4 Position, Receptacle, 4 Pin x 1 Layout, Pin, Contact Size 12, Nickel-Plated, 25A (50A Total), 250V, HYPERBUS™ ATP, Integrated Latch, Keyed A, Solid Rear Seal, End Cap, Grey Body	12	25A (50A Total)
	ATP04-4PB-P021	4 Position, Receptacle, 4 Pin x 1 Layout, Pin, Contact Size 12, Nickel-Plated, 25A (50A Total), 250V, HYPERBUS™ ATP, Integrated Latch, Keyed B, Solid Rear Seal, End Cap, Grey Body	12	25A (50A Total)
	ATP04-4PC-P021	4 Position, Receptacle, 4 Pin x 1 Layout, Pin, Contact Size 12, Nickel-Plated, 25A (50A Total), 250V, HYPERBUS™ ATP, Integrated Latch, Keyed C, Solid Rear Seal, End Cap, Grey Body	12	25A (50A Total)
	ATP04-4PD-P021	4 Position, Receptacle, 4 Pin x 1 Layout, Pin, Contact Size 12, Nickel-Plated, 25A (50A Total), 250V, HYPERBUS™ ATP, Integrated Latch, Keyed D, Solid Rear Seal, End Cap, Grey Body	12	25A (50A Total)
	ATP04-4P-EP13	4 Position, Receptacle, 4 Pin x 1 Layout, Pin, Contact Size 12, Nickel-Plated, 25A (50A Total), 250V, HYPERBUS™ ATP, Integrated Latch, Blank Keyed, Solid Rear Seal, End Cap, Black Body	12	25A (50A Total)
	ATP04-4PA-EP13	4 Position, Receptacle, 4 Pin x 1 Layout, Pin, Contact Size 12, Nickel-Plated, 25A (50A Total), 250V, HYPERBUS™ ATP, Integrated Latch, Keyed A, Solid Rear Seal, End Cap, Black Body	12	25A (50A Total)
	ATP04-4PB-EP13	4 Position, Receptacle, 4 Pin x 1 Layout, Pin, Contact Size 12, Nickel-Plated, 25A (50A Total), 250V, HYPERBUS™ ATP, Integrated Latch, Keyed B, Solid Rear Seal, End Cap, Black Body	12	25A (50A Total)
	ATP04-4PC-EP13	4 Position, Receptacle, 4 Pin x 1 Layout, Pin, Contact Size 12, Nickel-Plated, 25A (50A Total), 250V, HYPERBUS™ ATP, Integrated Latch, Keyed C, Solid Rear Seal, End Cap, Black Body	12	25A (50A Total)
	ATP04-4PD-EP13	4 Position, Receptacle, 4 Pin x 1 Layout, Pin, Contact Size 12, Nickel-Plated, 25A (50A Total), 250V, HYPERBUS™ ATP, Integrated Latch, Keyed D, Solid Rear Seal, End Cap, Black Body	12	25A (50A Total)
	ATP04-6P-P021	6 Position, Receptacle, 6 Pin x 1 Layout, Pin, Contact Size 12, Nickel-Plated, 25A (75A Total), 250V, HYPERBUS™ ATP, Integrated Latch, Blank Keyed, Solid Rear Seal, End Cap, Grey Body	12	25A (75A Total)
	ATP04-6PA-P021	6 Position, Receptacle, 6 Pin x 1 Layout, Pin, Contact Size 12, Nickel-Plated, 25A (75A Total), 250V, HYPERBUS™ ATP, Integrated Latch, Keyed A, Solid Rear Seal, End Cap, Grey Body	12	25A (75A Total)
	ATP04-6PB-P021	6 Position, Receptacle, 6 Pin x 1 Layout, Pin, Contact Size 12, Nickel-Plated, 25A (75A Total), 250V, HYPERBUS™ ATP, Integrated Latch, Keyed B, Solid Rear Seal, End Cap, Grey Body	12	25A (75A Total)
	ATP04-6P-EP13	6 Position, Receptacle, 6 Pin x 1 Layout, Pin, Contact Size 12, Nickel-Plated, 25A (75A Total), 250V, HYPERBUS™ ATP, Integrated Latch, Blank Keyed, Solid Rear Seal, End Cap, Black Body	12	25A (75A Total)
	ATP04-6PA-EP13	6 Position, Receptacle, 6 Pin x 1 Layout, Pin, Contact Size 12, Nickel-Plated, 25A (75A Total), 250V, HYPERBUS™ ATP, Integrated Latch, Keyed A, Solid Rear Seal, End Cap, Black Body	12	25A (75A Total)
	ATP04-6PB-EP13	6 Position, Receptacle, 6 Pin x 1 Layout, Pin, Contact Size 12, Nickel-Plated, 25A (75A Total), 250V, HYPERBUS™ ATP, Integrated Latch, Keyed B, Solid Rear Seal, End Cap, Black Body	12	25A (75A Total)
	ATP04-6P-EP14	6 Position, Receptacle, 6 Pin x 1 Layout, Pin, Contact Size 12, Nickel-Plated, 25A (75A Total), 250V, HYPERBUS™ ATP, Integrated Latch, Blank Keyed, Solid Rear Seal, End Cap, Black Body	12	25A (75A Total)
	ATP04-6PA-EP14	6 Position, Receptacle, 6 Pin x 1 Layout, Pin, Contact Size 12, Nickel-Plated, 25A (75A Total), 250V, HYPERBUS™ ATP, Integrated Latch, Keyed A, Solid Rear Seal, End Cap, Black Body	12	25A (75A Total)
	ATP04-6PB-EP14	6 Position, Receptacle, 6 Pin x 1 Layout, Pin, Contact Size 12, Nickel-Plated, 25A (75A Total), 250V, HYPERBUS™ ATP, Integrated Latch, Keyed B, Solid Rear Seal, End Cap, Black Body	12	25A (75A Total)
	ATP04-6PA-BUS	6 Position, Receptacle, Size 12 Contacts, (1) 6 Pin, HYPERBUS™ ATP, Keyed A, Grey Body	12	25A (150A Total)
	ATP04-6PB-BUS	6 Position, Receptacle, Size 12 Contacts, (1) 6 Pin, HYPERBUS™ ATP, Keyed B, Black Body	12	25A (150A Total)

HYPERBUSSTM ATP SeriesTM - Accessories

Image	Part Number	Description	Contact Size	Amperage
	ATP04-6PX-TYD	6 Position, Receptacle Tie Down, HYPERBUSSTM ATP, Gray Body For use with HYPERBUSSTM ATP Receptacle: ATP04-6PA/B-BUS	-	-



HB

HYPERBUSS™

PSM

POWER & SIGNAL MANAGEMENT



HYPERBUSS™ PSM Bussed Receptacle Blocks

Available in a variety of layout configurations

Amphenol Sine Systems' **HYPERBUSS™ PSM (Power & Signal Management) Bussed Receptacle Blocks** are environmentally sealed, multi-pin, heavy duty, thermoplastic connectors for use in applications where a common "bussed" electrical pathway is required in a condensed footprint, providing an effective way to connect multiple devices to one block. Our HYPERBUSS™ PSM Bussed Receptacle Blocks contain integrated latches to ensure proper mating with their respective AT, ATP or ATHD Series™ plugs, as well as industry standard connectors.

Buss: a conductor, or a group of conductors, used for collecting electric power from the incoming feeders and distributes them to the outgoing feeders; a type of electrical junction in which all the incoming and outgoing electrical current meets.

Key Features (Depending on layout arrangement)

- Connects multiple devices into one integrated bussed feedback assembly
- Meets SAE/SAEJ1939 requirements for CAN Bus applications
- Combines Power and Ground in one block
- Reduced cost by eliminating excessive wiring
- Potted block and sealed connections prevent corrosion found on open screw bus bars
- Integrated latches for mating
- IP68 and/or IP69K rated (in mated condition), depending on layout
- Interchangeable with standard AT, ATP or ATHD Series™ plugs and other industry connectors
- 13A-225A range



Applications: Heavy Duty, Transportation, Marine, Diagnostic, Military, Alternative Energy and Agricultural applications

HYPERBUSS™ PSM - Specifications (Reference Individual Datasheets)

IP Rating (in mated condition)	IP68 and/or IP69K rated, depending on layout
Contact Size	Size 4, Size 12 or Size 16
Max. Current (Amperage)	13A-225A
Max Voltage Rating	250V (See individual datasheets)
Operating Temperature	-55°C to +125°C
Coupling System	Integrated Latch
Housing Body	Thermoplastic
Contact Types	Machined
Contact Material	Copper Alloy, Nickel or Gold Plated
Min. Mating Cycles	>100
RoHS Compliant	ALL materials meet the requirements of the European Directive. (See website for documentation)

IP Ratings
IP68 rated (Dust tight; 1M of Water for 24 Hours, in mated condition)
IP69K rated (Dust tight; High-Pressure Waterproof, 4 Points (0°, 30°, 60°, 90°), in mated condition)




Standard products. Custom solutions
Customer Service +1 800 394 7732


HYPERBUSSM PSM - Bussed Receptacle Dimensions (mm)

Note: Refer to individual datasheets on www.amphenol-sine.com for full specs, faceviews, keying location and product dimensions.


AT04-3PBM02J1939-X401

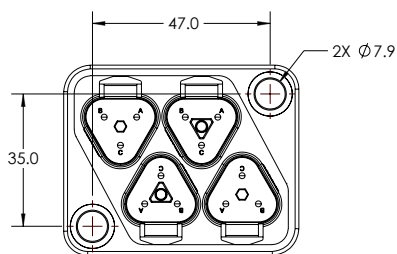


AT04-3PBM02J1939-X601

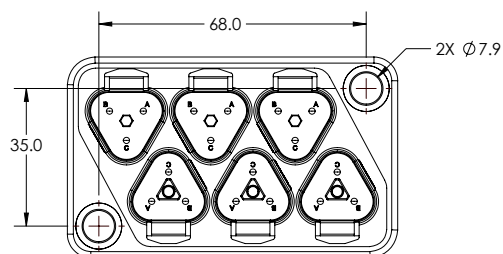


AT04-4PBM04-X601

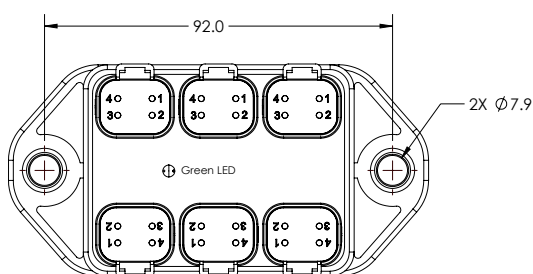


AT04-4PBM04-X801

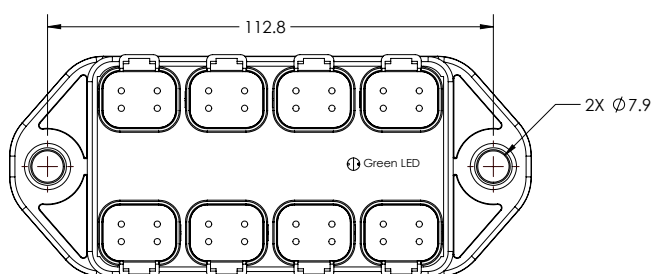


AT04-6PBM04-X601

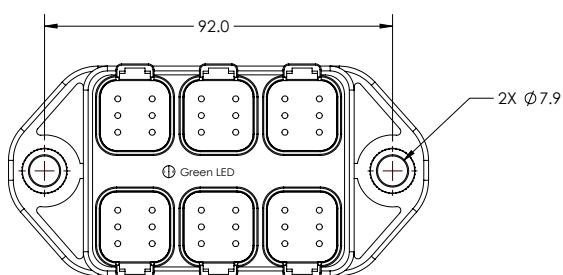


AT04-6PBM04-X801

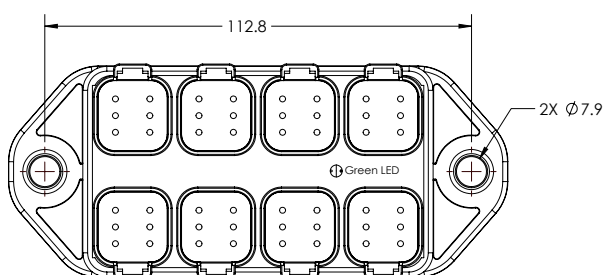

AT04-12PABM04-X2-TS01

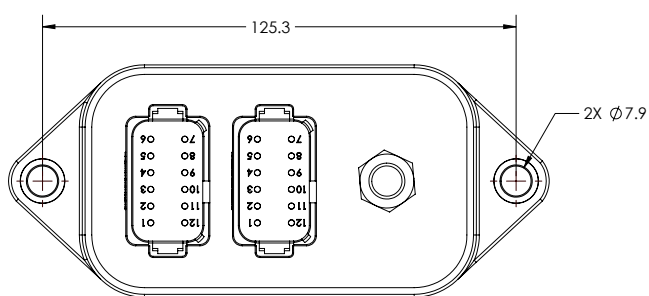


AT04-18PABM14-X2-TS01

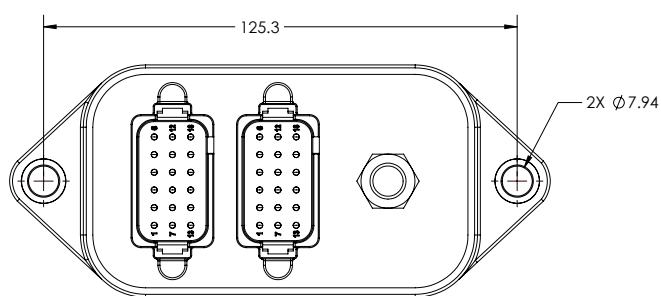


HYPERBUSSTM PSM - Bussed Receptacle Dimensions (mm)

Note: Refer to individual datasheets on www.amphenol-sine.com for full specs, faceviews, keying location and product dimensions.


ATF13-3PBM31J1939-X401

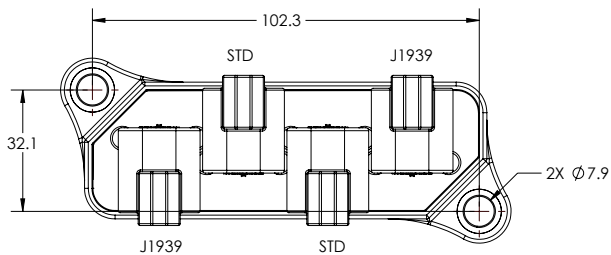


ATP04-06PBM14-X2-TS01

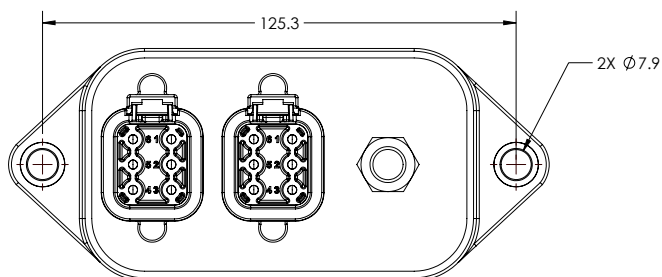


ATHD041-4PBM14-AT12PABM04-X201

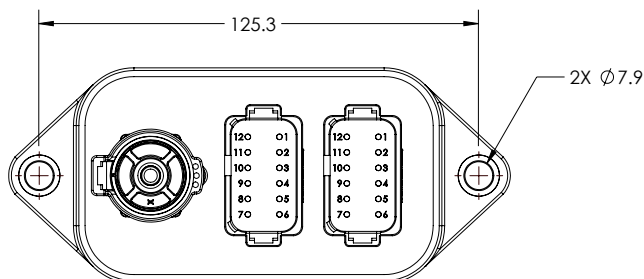

ATHD041-4PBM14-AT18PABM14-X201

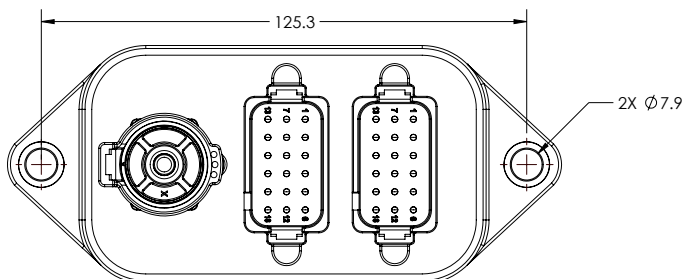


ATHD041-4PBM14-ATP06PBM14-X201

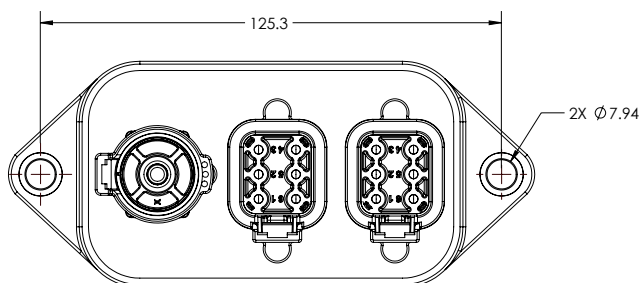

HYPERBUS™ PSM - Bussed Receptacle Blocks

Note: Refer to individual datasheets on www.amphenol-sine.com for full specs, faceviews, keying location and product dimensions.

Image	Part Number	Description	Contact Size	Amperage
	AT04-3PBM02J1939-X401	12 Position, J1939, Splitter Receptacle, 3 Pin x 4 Layout, Straight, Pin, Contact Size 16, Gold-Plated, 13A, 250V, HYPERBUS™ PSM, Potting, Black Body	16	13A
	AT04-3PBM02J1939-X601	18 Position, J1939, Splitter Receptacle, 3 Pin x 6 Layout, Straight, Pin, Contact Size 16, Gold-Plated, 13A, 250V, HYPERBUS™ PSM, Potting, Black Body	16	13A
	AT04-4PBM04-X601	24 Position, Splitter Receptacle, 4 Pin x 6 Layout, Straight, Pin, Contact Size 16, Nickel-Plated, 13A, HYPERBUS™ PSM, Green LED, Potting, Black Body See individual datasheet for voltage rating w LED.	16	13A
	AT04-4PBM04-X801	32 Position, Splitter Receptacle, 4 Pin x 8 Layout, Straight, Pin, Contact Size 16, Nickel-Plated, 13A, HYPERBUS™ PSM, Green LED, Potting, Black Body See individual datasheet for voltage rating w LED.	16	13A
	AT04-6PBM04-X601	36 Position, Splitter Receptacle, 6 Pin x 6 Layout, Straight, Pin, Contact Size 16, Nickel-Plated, 13A, HYPERBUS™ PSM, Green LED, Potting, Black Body See individual datasheet for voltage rating w LED.	16	13A
	AT04-6PBM04-X801	48 Position, Splitter Receptacle, 6 Pin x 8 Layout, Straight, Pin, Contact Size 16, Nickel-Plated, 13A, HYPERBUS™ PSM, Green LED, Potting, Black Body See individual datasheet for voltage rating w LED.	16	13A
	AT04-12PABM04-X2-TS01	25 Position, Power Splitter Receptacle, 1 Threaded Stud x 1 and 12 Pin x 2 Layout, Straight, Pin, Contact Size 16, Nickel-Plated, 13A/225A, 250V, HYPERBUS™ PSM, Potting, Keyed A, Black Body	16	13A/225A
	AT04-18PABM14-X2-TS01	37 Position, Power Splitter Receptacle, 1 Threaded Stud x 1 and 18 Pin x 2 Layout, Straight, Pin, Contact Size 16, Nickel-Plated, 13A/225A, 250V, HYPERBUS™ PSM, Potting, Keyed A, Black Body	16	13A/225A

HYPERBUS™ PSM - BoardLock™ ATF13 Series Bussed Receptacle Blocks

Note: Refer to individual datasheets on www.amphenol-sine.com for full specs, faceviews, keying location and product dimensions.


	ATF13-3PBM31J1939-X401	12 Position, J1939, Splitter Receptacle, 3 Pin x 4 Layout, Right Angle, Pin, Contact Size 16, Gold-Plated, 13A, 250V, HYPERBUS™ PSM, Potting, Black Body	12	13A
--	------------------------	--	----	-----

HYPERBUS™ PSM - ATP Series™ Bussed Receptacle Blocks

Note: Refer to individual datasheets on www.amphenol-sine.com for full specs, faceviews, keying location and product dimensions.

	ATP04-06PBM14-X2-TS01	13 Position, Power Splitter Receptacle, 1 Threaded Stud x 1 and 6 Pin x 2 Layout, Straight, Pin, Contact Size 12, Nickel-Plated, 25A/225A, 250V, HYPERBUS™ PSM, Potting, Black Body	12	25A/225A
--	-----------------------	---	----	----------

HYPERBUSSTM PSM - ATHD SeriesTM Bussed Receptacle Blocks
Note: Refer to individual datasheets on www.amphenol-sine.com for full specs, faceviews, keying location and product dimensions.

Image	Part Number	Description	Contact Size	Amperage
	ATHD041-4PBM14-AT12PABM04-X201	25 Position, Power Splitter Receptacle, 1 Pin x 1 and 12 Pin x 2 Layout, Straight, Pin, Contact Size 4 & 16, Nickel-Plated, 13A/100A, 250V, HYPERBUSSTM PSM, Potting, Black Body	4, 16	13A/100A
	ATHD041-4PBM14-AT18PABM14-X201	37 Position, Power Splitter Receptacle, 1 Pin x 1 and 18 Pin x 2 Layout, Straight, Pin, Contact Size 4 & 16, Nickel-Plated, 13A/100A, 250V, HYPERBUSSTM PSM, Potting, Black Body	4, 16	13A/100A
	ATHD041-4PBM14-ATP06PBM14-X201	13 Position, Power Splitter Receptacle, 1 Pin x 1 and 6 Pin x 2 Layout, Straight, Pin, Contact Size 12, Nickel-Plated, 25A/100A, 250V, HYPERBUSSTM PSM, Potting, Black Body	12	25A/100A



HB HYPERBUSS™ ATV



HYPERBUSS™ ATV Bussed Receptacles

Available in 18 position

Amphenol Sine Systems' **HYPERBUSS™ ATV Bussed Receptacles** are an environmentally-sealed, multi-pin, heavy duty, plastic, rectangular connector for use in applications where a common "bussed" electrical pathway is required, such as Bussed Feedback Receptacles used as a Splice Block or Tap Block. IP68 rated (in mated condition), the HYPERBUSS™ ATV Bussed Receptacles contain an integrated latch to ensure proper mating with standard ATV Series™ plugs, as well as industry standard connectors.

Buss: a conductor, or a group of conductors, used for collecting electric power from the incoming feeders and distributes them to the outgoing feeders; a type of electrical junction in which all the incoming and outgoing electrical current meets.

Key Features

- Size 16 contacts
- Available Keyed A Buss (Grey) or Keyed B Buss (Black)
- Sealed Integrated Bussed Feedback Assembly
- IP68 Rated (in mated condition)
- Included wedgelock confirms contact alignment/retention
- Integrated latch for mating
- Intermateable with standard ATV Series™ Plugs and other industry connectors



Applications: Heavy Duty, Transportation, Marine, Diagnostic, Military, Alternative Energy and Agricultural applications


HYPERBUSS™ ATV - Specifications (Reference Individual Datasheets)

IP Rating (in mated condition)	IP68	Contact Material	Copper Alloy, Nickel Plated
Contact Size	16	Bracket	Copper Alloy, Nickel Plated
Max. Current (Amperage)	13A Each	Sleeves	Aluminum, Black Anodized
Max Voltage Rating	250V	Min. Mating Cycles	>100
Operating Temperature	-55°C to +125°C	RoHS Compliant	ALL materials meet the requirements of the European Directive. (See website for documentation)
Coupling System	Integrated Latch	Approvals	UL ECBT2, UL ECBT8
Housing Body	Thermoplastic		
Contact Types	Machined		

HYPERBUSS™ ATV - Bussed Receptacle Dimensions (mm)

Note: Refer to individual datasheets on www.amphenol-sine.com for full specs, faceviews, keying location and product dimensions.

ATV04-18Px-BUS




IP Ratings

IP68 rated (Dust tight; 1M of Water for 24 Hours, in mated condition)
IP69K rated (Dust tight; High-Pressure Waterproof, 4 Points (0°, 30°, 60°, 90°), in mated condition)




Standard products. Custom solutions
Customer Service +1 800 394 7732


HYPERBUSSTM ATV - Bussed Receptacles
Note: Refer to individual datasheets on www.amphenol-sine.com for full specs, faceviews, keying location and product dimensions.

Image	Part Number	Description	Contact Size	Amperage
	ATV04-18PA-BUS	18 Position, Receptacle, Size 16 Contacts, (1) 18 Pin, HYPERBUSSTM ATV, Key A, Grey Body	16	13A (230A Total)
	ATV04-18PB-BUS	18 Position, Receptacle, Size 16 Contacts, (1) 18 Pin, HYPERBUSSTM ATV, Key B, Black Body	16	13A (230A Total)
	ATV46-18PSA-BUS-CKIT	KIT: 18 Position, HYPERBUSSTM ATV Series, Keyed A Contains: (1) 18 Position, Receptacle, HYPERBUSSTM ATV, Key A, Grey Body Contains: (1) 18 Position, Plug, ATV SeriesSTM, Key A, Grey Body	16	13A (230A Total)
	ATV46-18PSB-BUS-CKIT	KIT: 18 Position, HYPERBUSSTM ATV Series, Keyed B Contains: (1) 18 Position, Receptacle, HYPERBUSSTM ATV, Key B, Black Body Contains: (1) 18 Position, Plug, ATV SeriesSTM, Key B, Black Body	16	13A (230A Total)

HYPERBUS™ ATV - Sample Architecture: Plug and Play Battery GROUND/Battery POWER Buss System

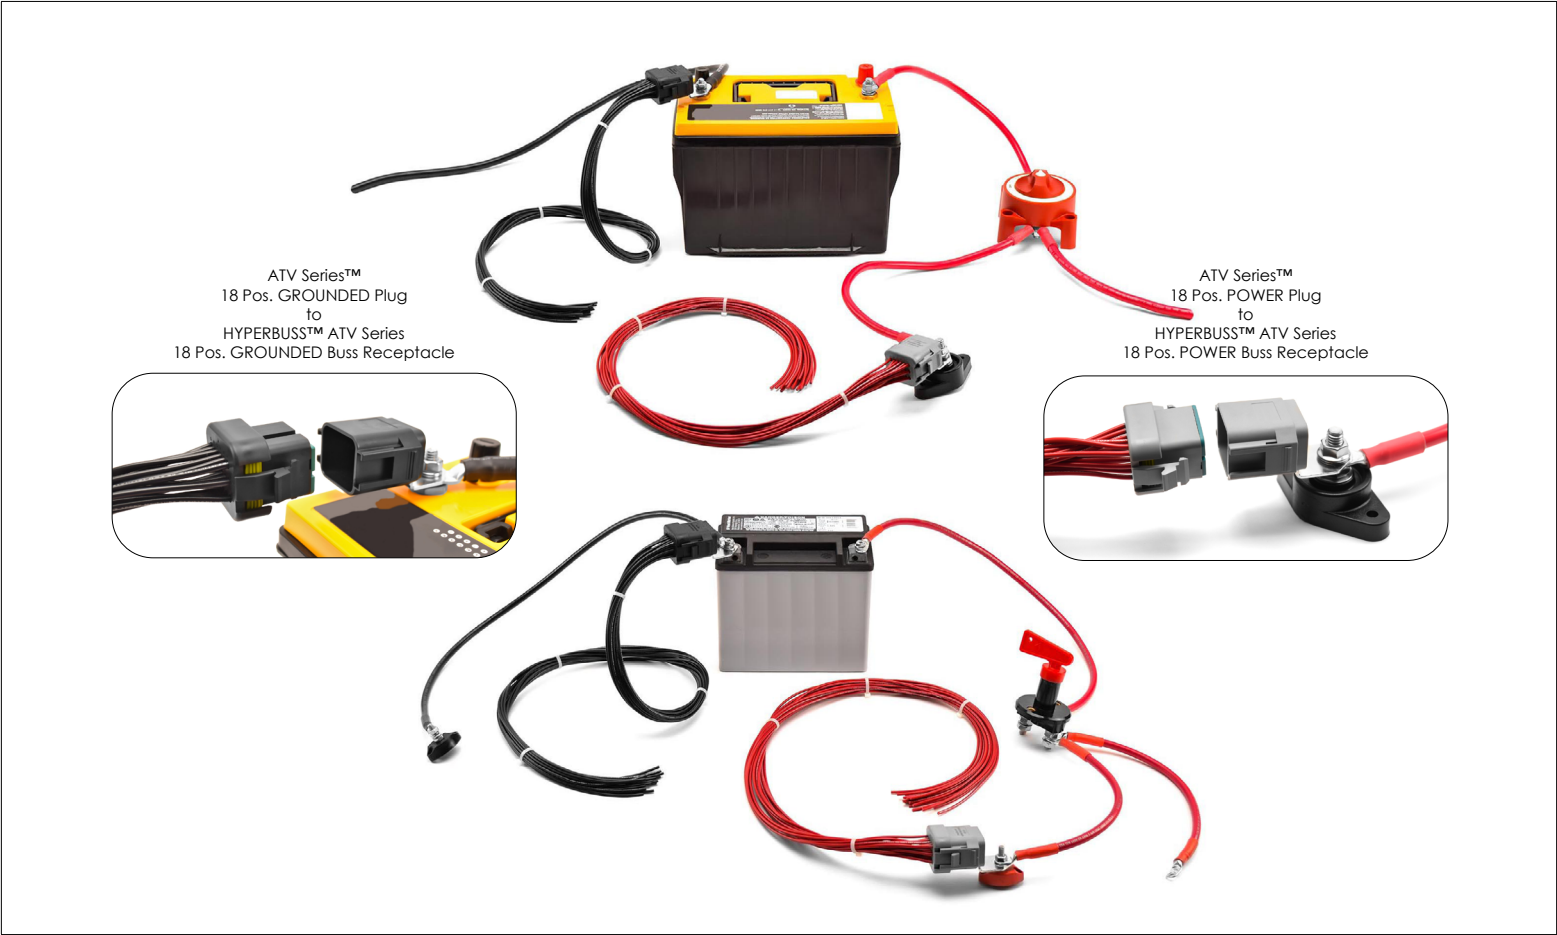

HYPERBUS™ ATV - Sample Architecture: Plug and Play Chassis GROUND Buss System

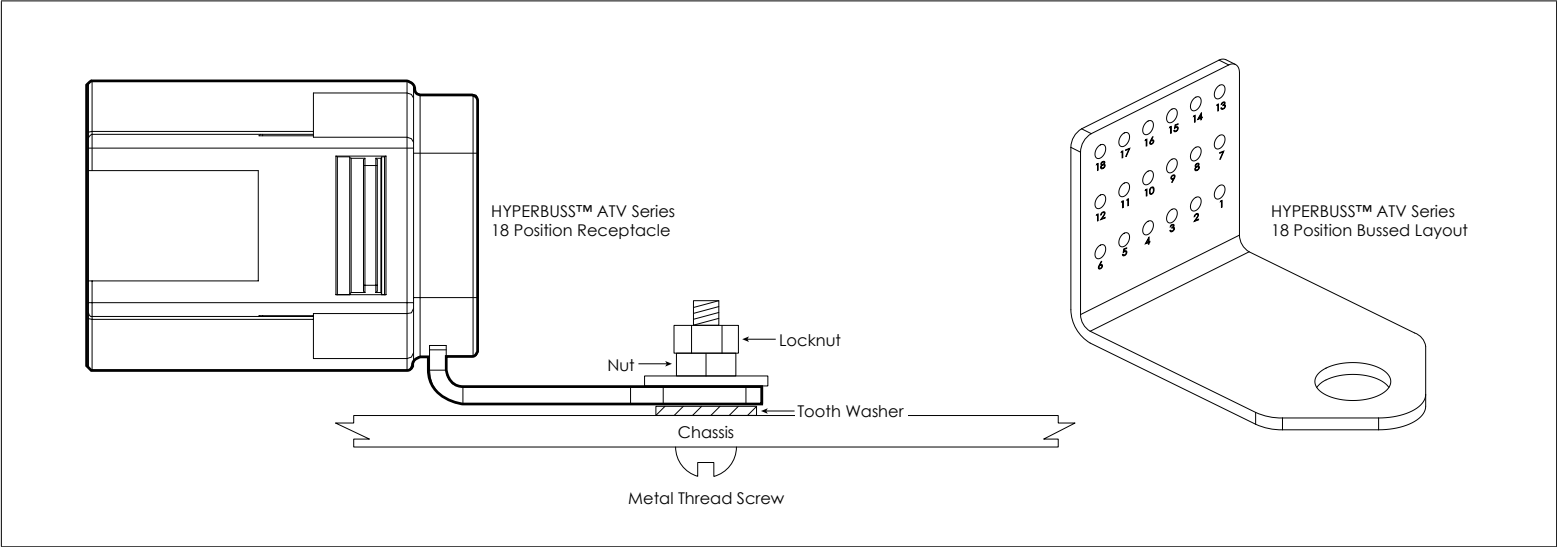



DM DuraMate™ AHDP with HYPERBUSS™



DuraMate™ AHDP Bussed Receptacles

Available in 16 position

Amphenol Sine Systems' **DuraMate™ AHDP with HYPERBUSS™ Bussed Receptacles** are an environmentally-sealed, multi-pin, heavy duty, plastic, circular connector for use in applications where a common "bussed" electrical pathway is required, such as Bussed Feedback Receptacles used as a Splice Block or Tap Block. IP68 and IP69K rated (in mated condition), the DuraMate™ AHDP with HYPERBUSS™ Bussed Receptacles contain an economical, quick-connect, circular, bayonet locking system to ensure proper mating with standard DuraMate™ AHDP plugs, as well as industry standard connectors,

Buss: a conductor, or a group of conductors, used for collecting electric power from the incoming feeders and distributes them to the outgoing feeders; a type of electrical junction in which all the incoming and outgoing electrical current meets.

Key Features

- Includes Bolt, Nut and Washers
- Available in Power (Red) or Ground (Black)
- Sealed (potted) Intergrated Bussed Feedback Assembly
- IP68 and IP69K rated (in mated condition)
- Quick-connect, circular, bayonet coupling system
- Intermateable with standard DuraMate™ AHDP plugs



Applications: Heavy Duty, Transportation, Marine, Military, Alternative Energy, Agricultural and other interconnect

DuraMate™ AHDP with HYPERBUSS™ - Specifications (Ref Individual Datasheets)


IP Rating (in mated condition)	IP68 and IP69K
Contact Size	12
Max. Current (Amperage)	25A Each
Max Voltage Rating	250V
Operating Temperature	-55°C to +125°C
Coupling System	Quick-Connect, Circular Bayonet
Housing Body	Thermoplastic
Contact Types	Machined
Contact Material	Copper Alloy, Nickel Plated
Bracket	Copper Alloy, Nickel Plated
Sleeves	Aluminum, Black Anodized
Min. Mating Cycles	>100
RoHS Compliant	ALL materials meet the requirements of the European Directive. (See website for documentation)
Approvals	-

IP Ratings
IP67 rated (Dust tight; 1M of Water for 30 Minutes, in mated condition)
IP68 rated (Dust tight; 1M of Water for 24 Hours, in mated condition)
IP69K rated (Dust tight; High-Pressure Waterproof, 4 Points (0°, 30°, 60°, 90°), in mated condition)



Standard products. Custom solutions
Customer Service +1 800 394 7732

DuraMate™ AHDP with HYPERBUSSTM - Bussed Receptacle Dimensions (mm)
Note: Refer to individual datasheets on www.amphenol-sine.com for full specs, faceviews, keying location and product dimensions.

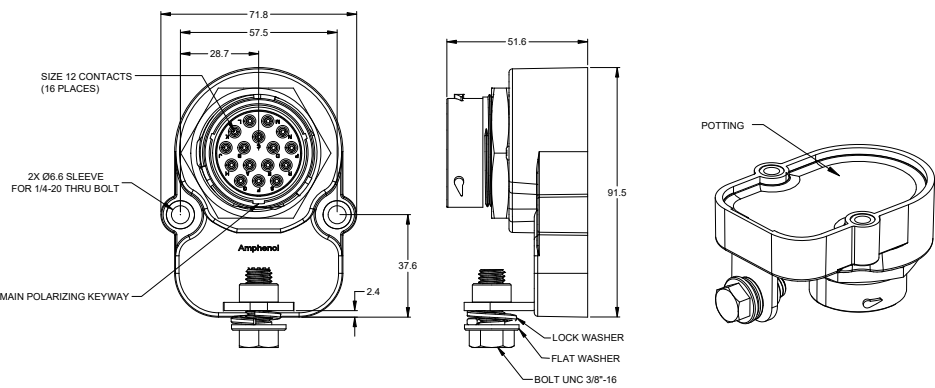

DuraMate™ AHDP with HYPERBUSSTM - Bussed Receptacles [For intermateable DuraMate™ AHDP Series plugs \(AHP06-\), refer to our website](#)

Image	Part Number	Description	Contact Size	Amperage
	AHDPH04-24-16P-BLK-CN	Shell Size 24, 16 Position, Receptacle, Size 12 Contacts, (1) 16 Pin (400A), DuraMate™ AHDP with HYPERBUSSTM, Plastic, Potted, Black Body (Includes bolt, nut and washers)	12	25A (400A Max)
	AHDPH04-24-16P-RED-CN	Shell Size 24, 16 Position, Receptacle, Size 12 Contacts, (1) 16 Pin (400A), DuraMate™ AHDP with HYPERBUSSTM, Plastic, Potted, Red Body (Includes bolt, nut and washers)	12	25A (400A Max)