


DRAWING NUMBER		REV.
A	500DL-300 SHEET 1 OF 1	C

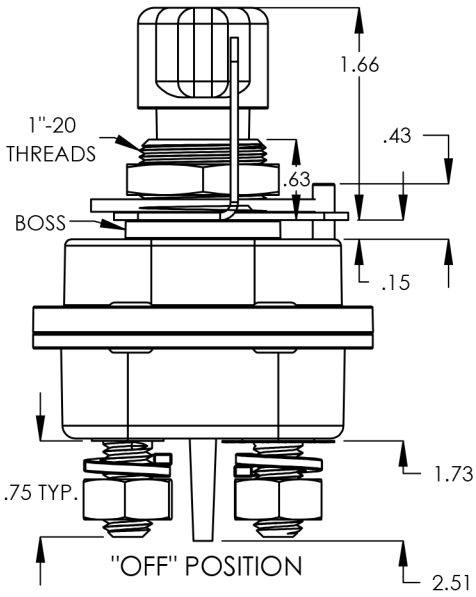


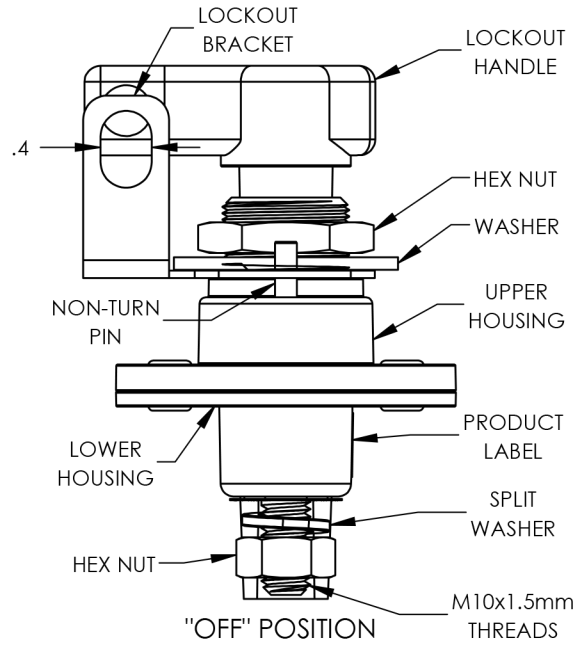


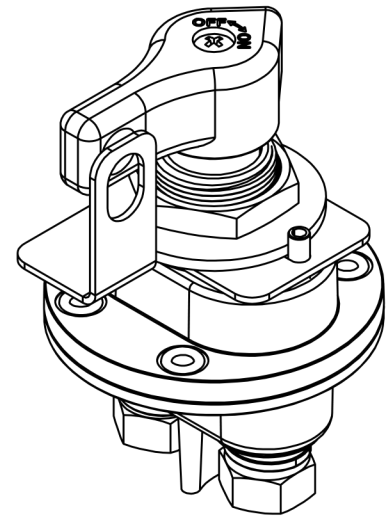


DETAIL SHOWN
NOT TO SCALE

MOUNTING DETAILS

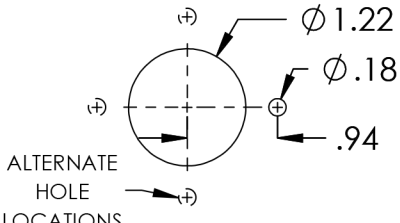




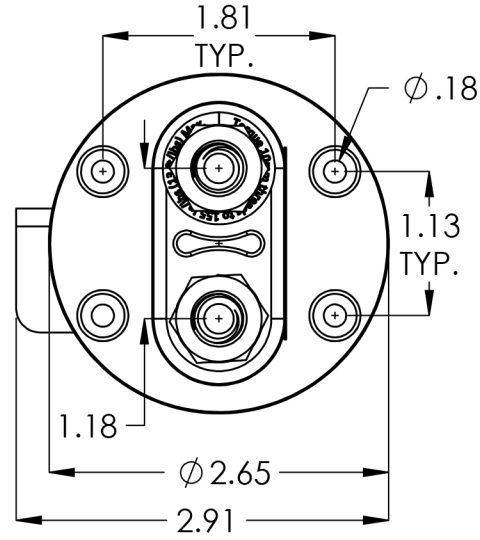



PRODUCT LABEL



SPST CIRCUIT DIAGRAM

Technical data:	
Handle Material:	Red GF Nylon 6
Upper Housing Material:	Zinc Diecast
Lower Housing Material:	GP Phenolic
Min. Insulation Resistance:	100 Mohm
Dielectric Withstanding Voltage:	1,100V -1min
Voltage Drop Max.:	0.175 mV
Voltage:	48 VDC
Continuous Rating:	300 A
Overload:	750 A - 180sec.
	1,500 A - 30sec.
Sealing:	IP67
Vibration:	4G / 50-2KHz
Shock:	6G / 11ms
Temperature Range:	-40C to +85C
Terminal Torque:	155 in.lb
Mounting Torque:	18 ft.lb

	NAME	DATE
DRAWN	JRT	4-15-15
CHECKED		
ENG APPR.	RMF	4-15-15
MFG APPR.		
Q.A.		

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ±1/32
ANGULAR: MACH ± BEND ±
TWO PLACE DECIMAL ±.015
THREE PLACE DECIMAL ±.005

SHALLCO
308 COMPONENTS DRIVE, SMITHFIELD, NC 27577 USA

DO NOT SCALE DRAWING

TITLE: **LOCKOUT BATTERY DISCONNECT 48VDC-300AMPS**

BLANK WEIGHT: -

PART WEIGHT: 0.8 LBS

SIZE A | DWG. NO. 500DL-300 | REV. C

SCALE:1:2 | SHEET 1 OF 1

DWG NO:500DL-300

REV.	DESCRIPTION	DATE	APP'D
	REVISIONS		

PROPRIETARY AND CONFIDENTIAL

This document contains proprietary data for products designed by Shallco, Inc., of Smithfield, NC. No disclosure; reproduction, or use of any part thereof may be made except by written permission.