



**NEW**

# ST Blade

## COMPACT FUSE BLOCKS

COMMON SOURCE

### Provides surface mount circuit protection for ATO®/ATC® Fuses in a compact footprint

- Compact common source fuse block
- Accepts ATO® and ATC® fast acting blade fuses
- Single side design allows wire entry from one side to minimize footprint
- Ignition Protected—meets ISO 8846 and SAE J1171 for use in a gasoline engine compartment
- Insulating cover meets ABYC/USCG insulation requirements
- Tin-plated copper buses and fuse clips
- Accepts ring or snap fork type terminals
- Small format standard and custom labels available
- Includes write-on circuit labels
- Fuses sold separately



#### Related Products



ATO® or ATC® Fuses



easyID™ ATC® Fuses

# ST BLADE

## COMPACT FUSE BLOCKS






Specifications	5045/5046
Voltage Max. Operating	32V DC
Amperage Max. Operating	30A per circuit
Amperage Max. Operating	100A per block
Fuse Type	ATO <sup>®</sup> or ATC <sup>®</sup> Fuses
Screw Terminal	#8-32 Screws with captive star lock washer
Mounting	#8 Screw (M4)

### Regulatory

Ignition Protected-meets ISO 8846 and SAE J1171

PN	Circuits	Cover
5045	4	Included
5046	8	Included

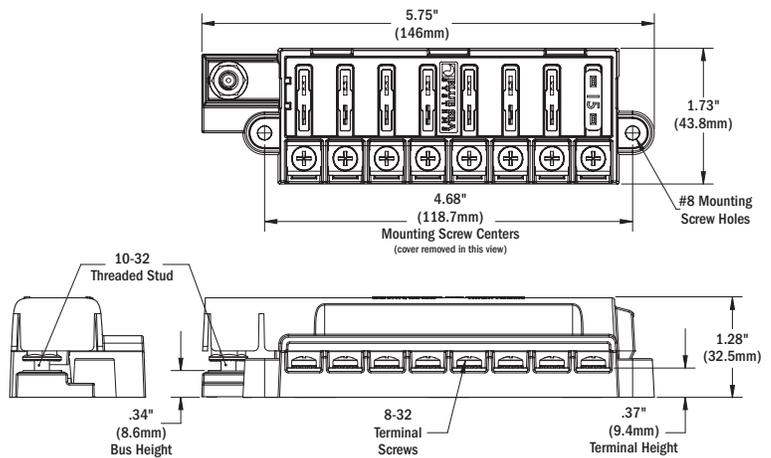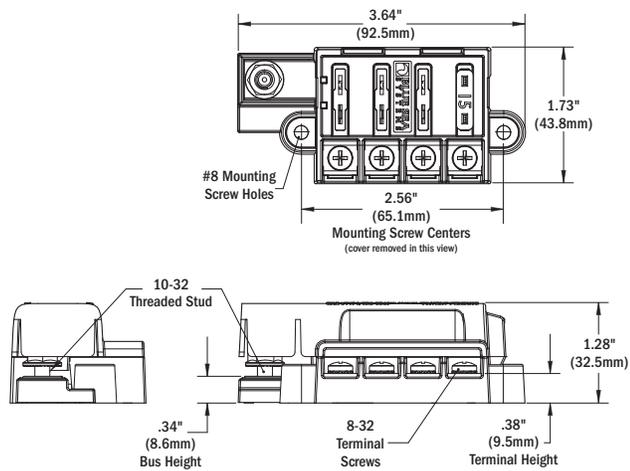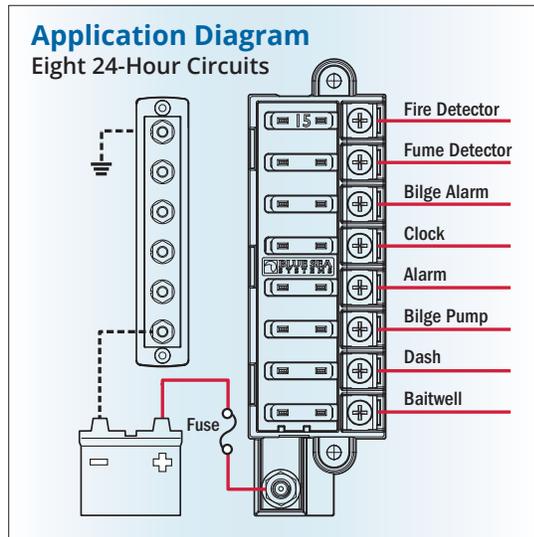

425 Sequoia Drive  
 Bellingham, WA 98226 USA  
 p 360.738.8230  
 f 360.734.4195  
 conductor@blueseas.com  
 www.blueseas.com

Specifications subject to change.  
 See blueseas.com for current information.  
 980022490 Rev.001