
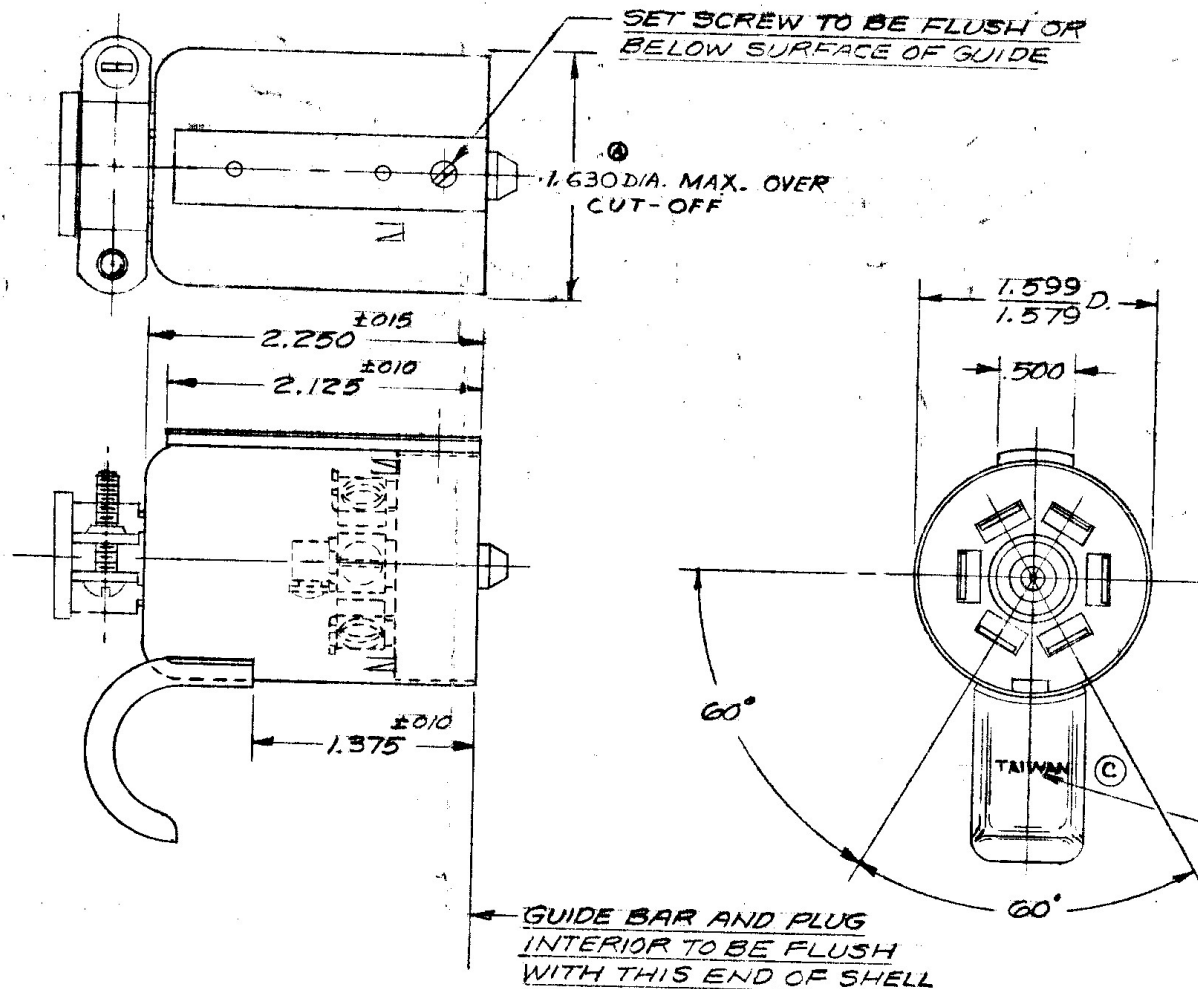


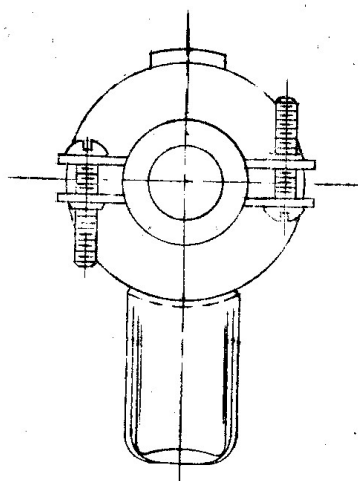

RELIEF CLAMPS TO BE SCREWED DOWN
RUBBER SLEEVE TO PREVENT SLEEVE FROM
S OUT IN SHIPMENT.
STEEL PARTS TO BE .00035 CADMIUM PLATE
CLEAR CHROMATE COATING AND MUST
AND A MIN. OF 48 HOURS SALT SPRAY
S.

ALS:
LOCKWASHER, RELIEF CLAMPS, CLAMP SCREWS,
SCREW, CENTER SCREW & TERMINAL SCREWS,
PLUG INTERIOR, PHENOLIC, INSULATING
TER, NYLON, SLEEVE, RUBBER, CENTER TERMINAL,
TERMINAL POST, TERM. PLATES & FLAT TERMINAL,

FORMERLY 97P

BY KJB DRAWN BY W99 CHECKED BY

REVISIONS - AUTHORIZED BY - CHANGED BY - DATE

ED 1.6300, DIA.	ED	W99	5-27-75
#W99 97P	W99	W99	9-19-79
TAIWAN TO NEW	M.F.	W99	12-2-82

APPROVED BY

REVISIONS - AUTHORIZED BY - CHANGED BY - DATE

ECN	F				
	G				
	H				
	J				
	K				

SCALE FULL

FRACTIONS $\pm 1/16$ DECIMALS $\pm .005$ ANGLES $\pm 0^{\circ}30'$

MATERIAL

FINISH

TITLE

7 CIRCUIT PLUG

NO.

12-702