


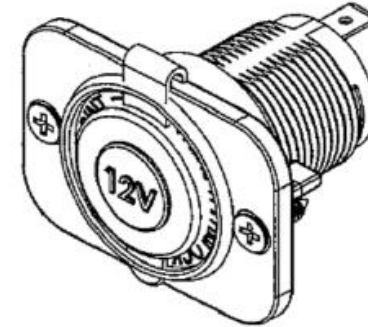
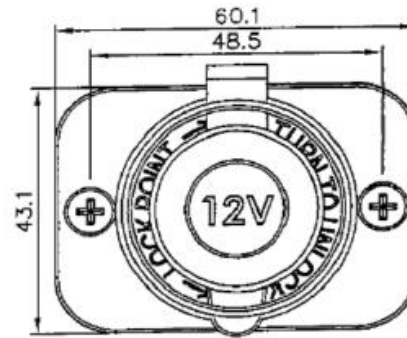


DESCRIPTION:



- * WATER PROOF SEALING CAP
- * SEALINK LOCKING SYSTEM
- * COMPATIBLE WITH STANDARD DC PLUGS

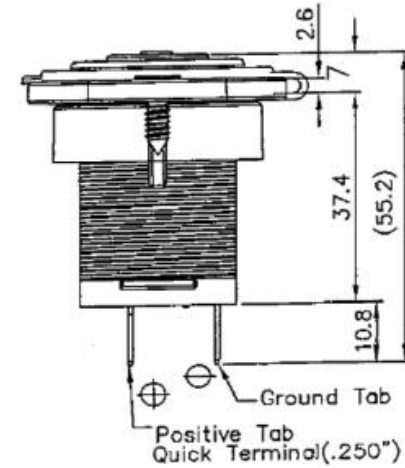

RATING	12.0 VDC 20A MAX
INSULATION R.	DC 500V 100M ohm MIN
DIELECTRIC	AC 1500V 1 minute
OP. TEMP	-20 C - 85 C

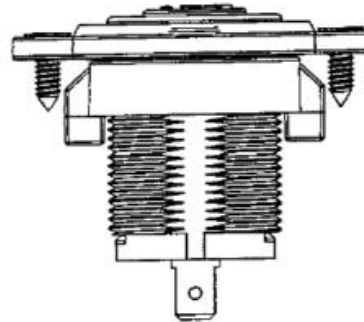

MOUNTING HOLE

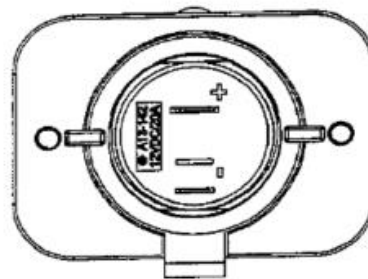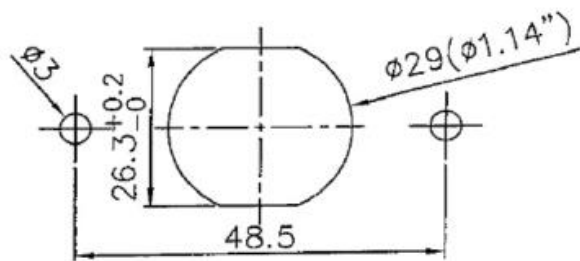

AW/SCI

Notes: 1. Unless specified,
linear tolerance +/- 0.3