



Switchable High Amp Circuit Breaker
Type III Vehicle Protection
Manual Reset with On-Off function
5,000 Amp (U3) Interrupt Capacity
Ignition-Protected
IP67 Waterproof
Cadmium Free
56VDC max up to 200A

SERIES 87

RAISING THE BAR
MP - COUNT ON IT



SUPERIOR CIRCUIT PROTECTION

www.mechprod.com

Series 87 Overview

FEATURES:

Panel and surface mount with On-Off switch function
Wider Amperage Range - **25 to 250 Amp**
Single pole thermal breaker with manual reset
Main Breaker Protection Interrupt Rating
5,000A (U3) interrupt capacity
Ignition protected
IP66 Weatherproof



- Robust **5/16"-18 or 3/8"-16 studs**
- Round hole mounting cutout*
- Industry standard mounting
- Double set of contacts
- Trip Free design

*See part number configuration page for rear panel mount options

Series 87 Specifications

Standard Amp Ratings	25, 30, 35, 40, 50, 60, 70, 80, 90, 100, 110, 120, 135, 150, 175, 200, 225, & 250 Amps		
Maximum Voltage Ratings	Type III: 25A - 200A 56VDC max; >200A 48VDC max		
Ultimate Trip	Must Hold 100% at 25°C/77°F Must Trip at 135% within 1 hour		
Dielectric Strength	1,500VAC Minimum		
Interrupt Capacity	25A-200A: 5000A@14VDC; >200A: 1000A@14VDC 25A-200A: 3000A@28VDC; >200A: 1000A@36VDC 25A-200A: 1500A@56VDC; >200A: 750A@48VDC		
Cycle Endurance	Switching 2000 cycles at rated current and voltage.		
Operating Temperature Range	-40°C/-40°F to 85°C/185°F		
Termination	5/16"-18 or 3/8"-16 threaded studs		
Torque Rating	75 in-lbs for 5/16-18", 100 in-lbs for 3/8"-16		
Mounting Hole	#10 or M5 screw		
Weight (with terminal hardware)	S1 = .49lbs / 7.7oz / 223gm P1 = .35lbs / 5.5oz/ 157gm	S2 = .53lbs / 8.5oz / 240gm P2 = .37lbs / 6.0oz / 170gm	
	Environmental		
Ignition Protected	Compliant to SAE J1171		
Ingress Protection	IP67		
Corrosion	Conforms to Mil-STD-202, Method 101, Test Condition A, for 96 hours under a 5% salt spray.		
Humidity	Conforms to Mil-STD-202, Method 106, for 240 hours at 95% RH.		
Shock	Rated to withstand 100G per Mil-STD-202, Method 213, Test Condition A.		
Vibration	Rated to withstand 10G per Mil-STD-204, Test Condition A.		
	Regulatory Compliance Summary		
	Interrupt Capacity: Meets SAE J553, ABYC-E11, UL1077* Ignition Protected: SAE J1171 Endurance: SAE J553 Dielectric Strength: UL1077* Shock, Vibration, Corrosion, Humidity: Mil-STD-202 Waterproof IP67		

*tested per UL1077 methods

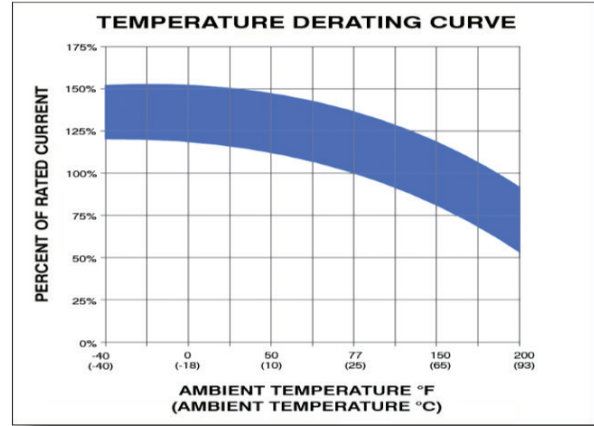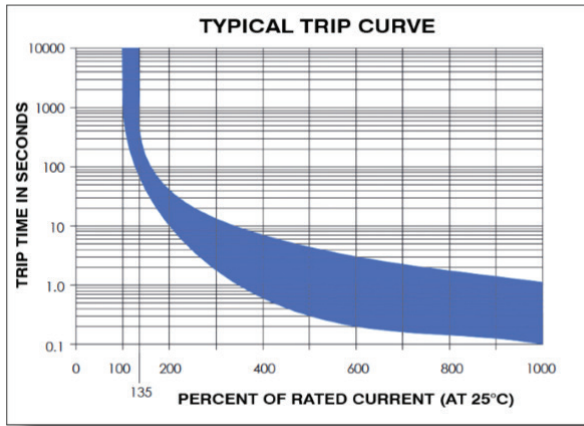


Typical Overload Trip Time Data (in seconds)

Current Rating	200%	400%	600%	800 %	1000%
25-250 Amps	10-40	0.6-7.0	0.2-3.0	0.15- 2.0	0.09-1.2

Typical Ambient Temperature Correction Factor

Current Rating	°F	-40	0	50	77	150	200
	°C	-40	-18	10	25	65	93
25-250 Amps		0.80	0.84	0.87	1.00	1.22	1.47

Series 87 Physical Configuration

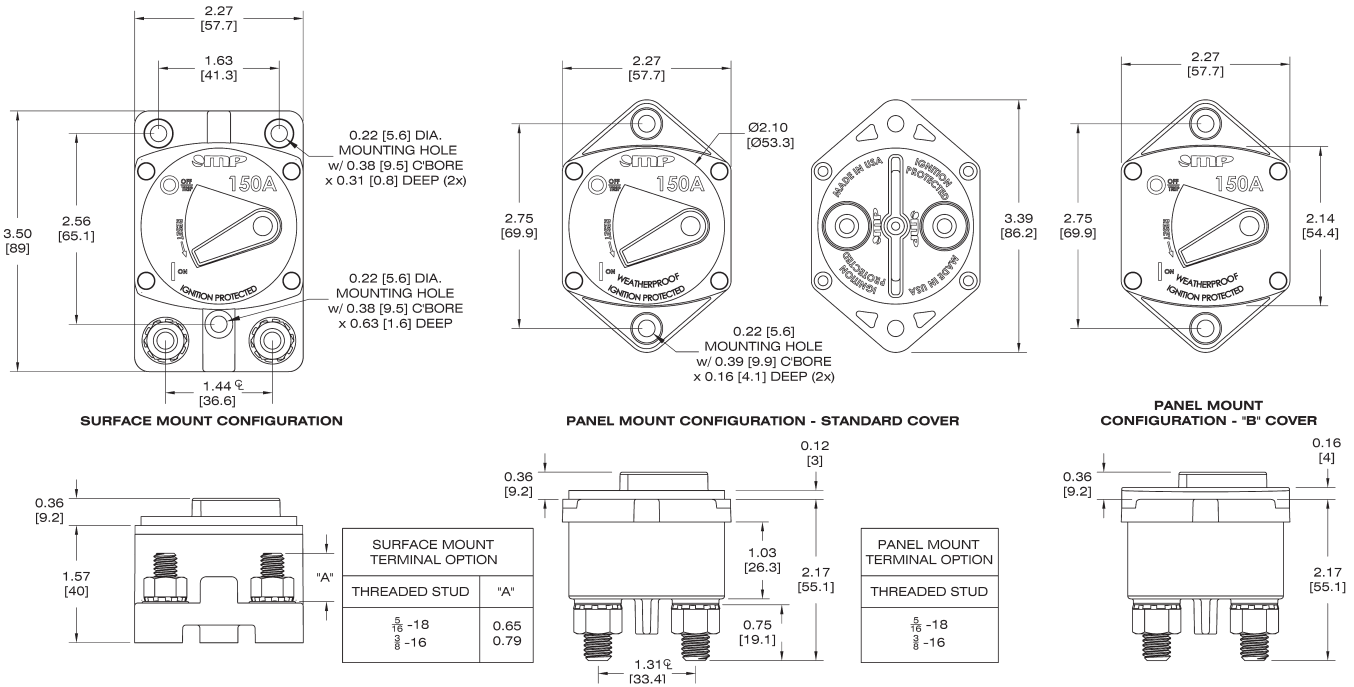

Series 87 Part Numbering Guide

P/N: 8 7 5 - - -

Series Number

87 = Series Circuit Protector

Vehicle Protection

5 = Type III Manual Reset

Mounting Options / Configurations

P = Panel Mount

S = Surface Mount

Terminal Options

1 = 5/16"-18 Stud (Not available on 225 & 250 Amp)

2 = 3/8"-16 Stud

Rear Mount Panel Cutout

Blank = Round*

B = Rounded rectangle / equivalent**

Terminal Hardware

0 = No Terminal Hardware

1 = (2) SS Sems Nuts, Bulk

2 = (2) SS Sems Nuts, (Assembled)

Amp Rating

025 - 250 (25 to 250 Amps)

For 3D CAD:

www.mechprod.com/3d-models-catalog



875-S1-050-2



*875-Px-200-2

Standard round
Front or rear panel mount

**875-Px-100-2B


with rounded rectangle equivalent
rear panel mount only

Series 87 Typical Applications

Ideal for DC power systems in marine as main or branch circuit breaker, truck and bus systems, RV systems, accessories, lift gates, etc.

PANEL MOUNTING CUTOUT
- STANDARD COVER

PANEL MOUNTING CUTOUT
- "B" COVER

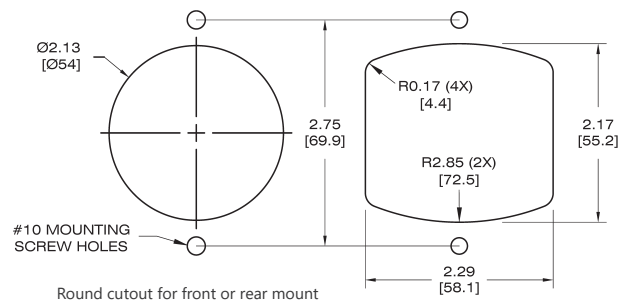

1112 N. Garfield St. Lombard, IL 60148 helpme@mechprod.com
phone 630 | 953 | 4100 fax 630 | 953 | 4110 www.mechprod.com

Specifications subject to change

QC-4018-F



WARNING: Cancer & Reproductive Harm
www.p65warnings.ca.gov/