


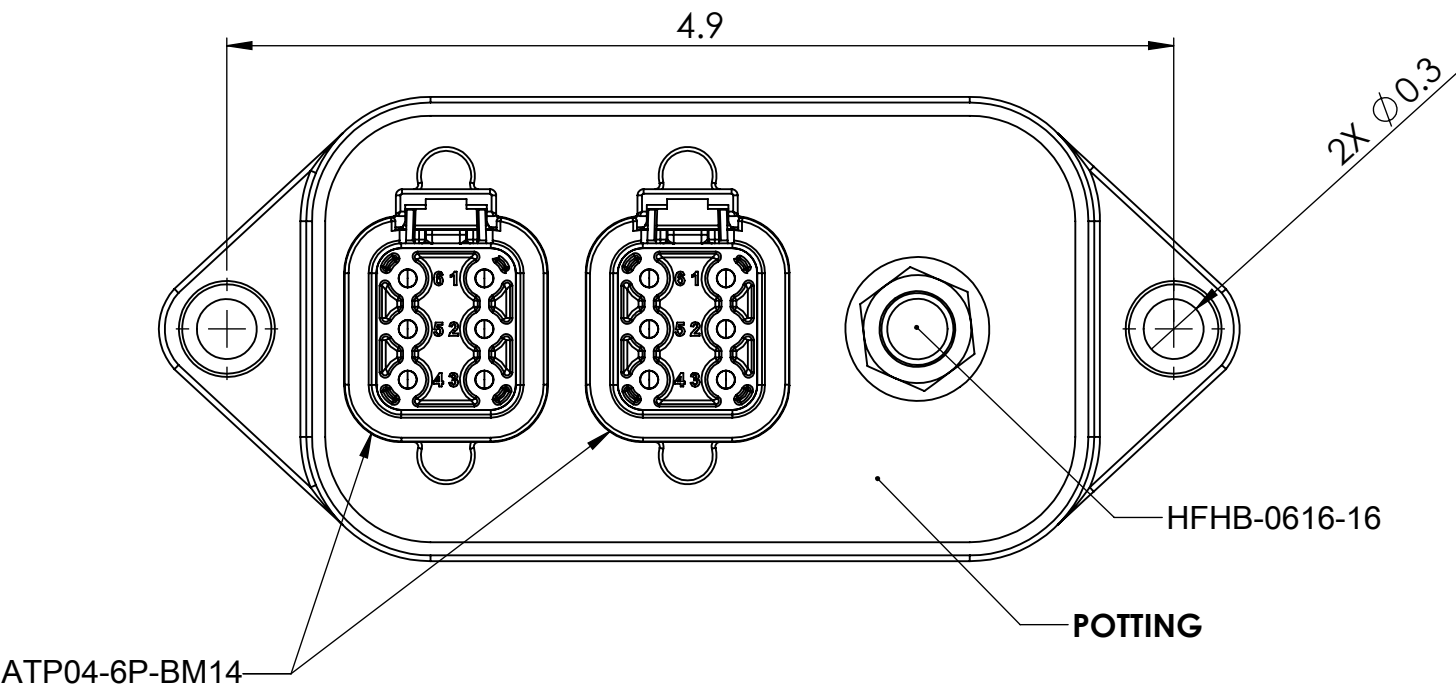
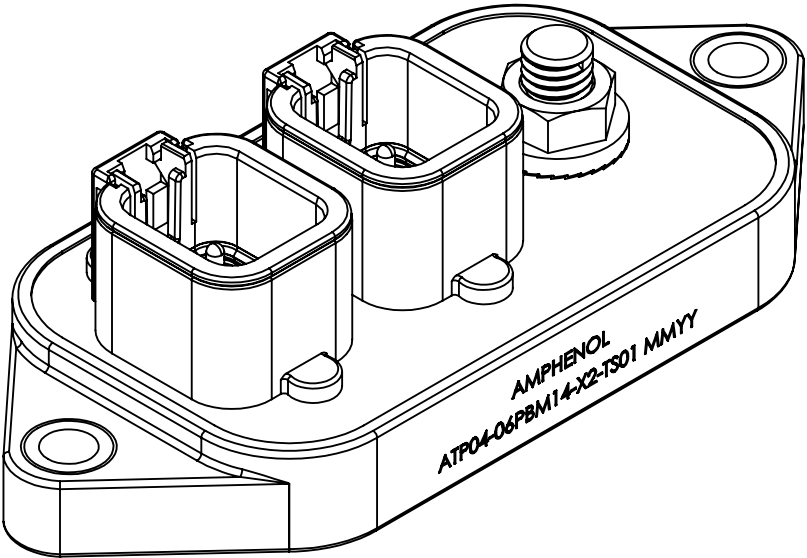


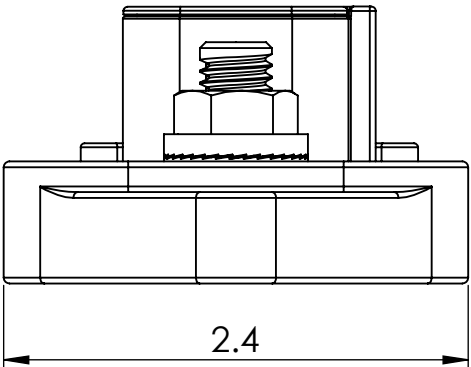

DETAIL B
SCALE 2 : 1

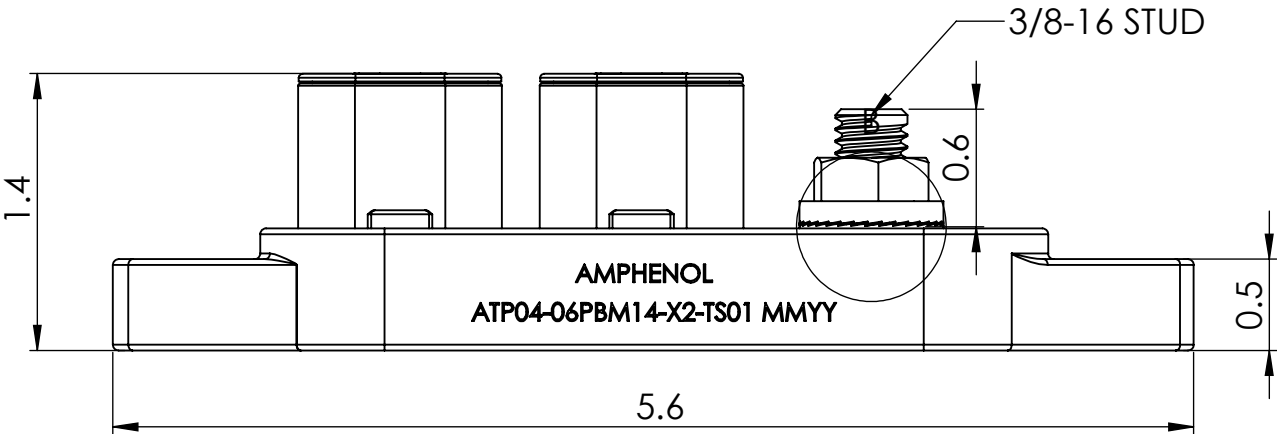

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:
HOUSING: THERMOPLASTIC, BLACK
INTERFACE SEAL: SILICONE RUBBER, RED
SEAL RETAINER: THERMOPLASTIC, BLACK
CONTACT: NICKLE PLATED COPPER ALLOY
2. MODIFICATIONS: ALL 13 PINS BUSSED TOGETHER.
3. SPECIFICATIONS:
3.1 CURRENT RATING: (HFHB-0616-16) 225 AMPS MAX.
(ATP04-6P-BM14) 25 AMPS MAX PER PIN.
3.2 OPERATING TEMPERATURE: -55°C TO +125°C
3.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
3.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C.
3.5 IP68 (1M of water for a period of 24 hours, in mated condition) IP69K (in mated condition)
3.6 MATING CYCLE DURABILITY: 100 CYCLES
3.7 RoHS COMPLIANT
4. MATING PART:
3/8-16 STUD
ATP04-6P-8M13: ATP06-6S* PLUG (* = ALL MODIFICATIONS)
5. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

REVISIONS			
REV.	DESCRIPTION	DATE	BY
A1	RELEASE	8/27/2024	CE
A2	ADDED 3/8-16 FLANGE NUT	9/24/2025	CE
A3	CHANGED 3/8-16 NUT TO FLANGE NUT	10/20/2025	CE

UNLESS OTHERWISE SPECIFIED: 1) DIMENSIONS ARE IN METRIC (mm) 2) TOLERANCES ARE AS FOLLOWS: 1 PL DEC: ± 0.5 FRACTIONAL: ± 1/8 2 PL DEC: ± 0.25 ANGLES: ± 1° 3 PL DEC: ± 0.1 3) NOTE REFERENCE =		SIGNATURES		DATE	Amphenol Sine Systems - www.amphenol-sine.com 44724 Morley Drive Clinton Township, MI 48036 DESCRIPTION: HYPERBUSS 225 AMP POWER SPLITTER STRAIGHT 12 POSITION, 12AWG, NICKEL CONTACTS, COPPER THREADED STUD, POTTED SIZE DWG NO: REV B C-ATP04-06PBM14-X2-TS01 A3 SCALE: NONE SHEET 1 OF 1	
MATERIAL SPECIFICATIONS: WEIGHT:		DRAWN:	CE	7/15/2024		
		CHECKED:				
		ENGINEER:				
		APPROVAL:				
DO NOT SCALE DRAWING		THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.				