


RUBBER PART GENERAL TOLERANCE			
PART DIM.	1	2	(3)
0 TO 3	± 0.2	± 0.3	± 0.4
3 TO 6	± 0.2	± 0.4	± 0.5
6 TO 10	± 0.3	± 0.5	± 0.6
10 TO 18	± 0.3	± 0.6	± 0.8
18 TO 30	± 0.4	± 0.8	± 1.0
30 TO 50	± 0.5	± 1.0	± 1.5
50 TO 80	± 0.6	± 1.2	± 2.0
80 TO 120	± 0.7	± 1.4	± 2.5
120 TO 180	± 0.8	± 1.6	± 3.0
180 TO 250	± 1.0	± 2.0	± 4.0
250 TO 315	± 1.2	± 2.5	± 5.0
315 TO 400	± 1.5	± 3.0	± 6.0
400 TO 500	± 1.8	± 3.5	± 7.0
500 OVER	± 0.4 %	± 0.8 %	± 1.5 %

#38692

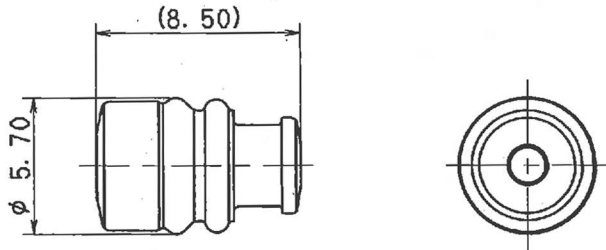

- 注記
- △ 1. 通用電線サイズ: AVS 0.5~0.85
: AVSS/CAVS 1.25
: CHFUS 1.5 HFSS 1~1.5
 - △ 2. () 内品番は、エアバック (A/B) 回路及び特別管理回路に使用する時に適用すること。

- NOTES
- △ 1. APPLICABLE WIRE SIZE: AVS 0.5~0.85
: AVSS/CAVS 1.25
: CHFUS 1.5 HFSS 1~1.5
 - △ 2. () PART NO. IS USED FOR PARTS ASSOCIATED WITH A/B CIRCUITS OR OTHER SPECIFIED CIRCUIT.

△ 05/01/27	CHANGED NOTE, ETC.	C05-Z155	H. T	CUSTOMER		MATL. SILICONE RUBBER	TREAT.
△ 04/04/08	CHANGED NOTE, NAME & ADDED NOTE, A/B PART NO.	C04-X219	H. T	CUSTOMER PART NO.	CUSTOMER DWG NO.	SPEC. (DARK GRAY)	& FIN.
95/08/24	NEW	C95-M259	K. O	OFFICE	TRIAL PART NO.	NAME △ 2. 3I (090I) 6mm pitch RUBBER	
LET	DATE	REVISION RECORD NO.	CHKD	VENDOR		STOPPER (M SIZE)	
GENERAL TOLERANCE				VENDOR NO.		PART NO. △ 7158-3007-10 (7B58-3007-10)	
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1
C	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15
SPECIFIED				MASS	g	DWG NO. 7158-3007-10:R SET DWG NO.	
				05.01.28		YAZAKI CORPORATION	
				94/09/27	05/01/27		